



FI0406XT  
MB - Matte Black



FI0406XT  
BZ - Bronze



FI0406XT  
RD - Red Baron

SERIES	LUMENS <sup>1</sup>		CCT		OPTICS		DRIVER / DIMMING		LENS		MOUNTING		FINISH <sup>2</sup>	
<b>FI0406XT</b>	<b>10L</b>	1000 Lm	<b>30K</b>	3000K	<b>WD</b>	Wide	<b>EX</b>	Electronic Driver, 120V/277V	<b>FG</b>	Frosted Glass Lens	<b>SM</b>	Surface Mount	<b>MW</b> <sup>3</sup>	Matte White
													<b>MB</b> <sup>3</sup>	Matte Black
													<b>PT</b> <sup>3</sup>	Platinum Silver
													<b>BZ</b>	Bronze
													<b>RD</b>	Red Baron
													<b>CC</b>	Custom Color

EXAMPLE: FI0406XT10L30KWDEXFGSMMW

**NOTES:**  
1 Nominal Source Lumens at 30K 2 See Color Page for More Options/Consult Factory for Special Finishes 3 Standard Finishes



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.




**TASK LUME**  
**XT SERIES**

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
FI0406XT10L	1000	496	9	55

<sup>1</sup> Nominal Source Lumens at 35K    <sup>2</sup> Nominal Delivered Lumens at 35K

**HOUSING DIMENSIONS**

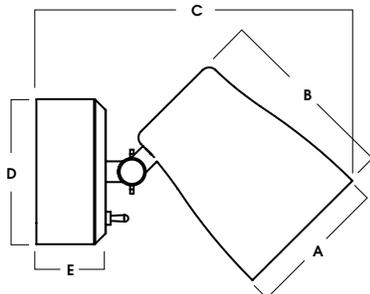

A	B	C	D	E
5.1 129.5 mm	6.6 167.6 mm	11.4 289.6 mm	5.3 134.6 mm	2.5 63.5 mm

**FEATURES**

Wall mounted adjustable task light with integral toggle switch. Interchangeable LED module for ease of maintenance. Electronic LED Driver in canopy for thermal management.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. Specify inside and outside finish. Matte white interior is standard.

**ELECTRONICS**

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning.


**CONSTRUCTION**

Shade is spun in our factory from 0.080 high purity aluminum. Passive cast aluminum heatsink for optimal thermal management.

**CODE COMPLIANCE**

BAA Compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

F10406XT-10L-30K-WD-EX-FG-SM-MW

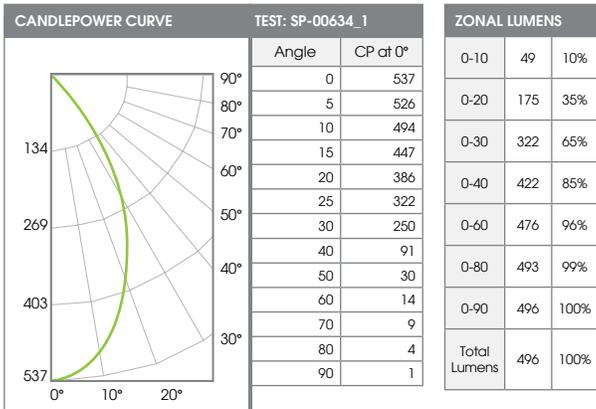

TEST: SP-00634\_1

Angle	CP at 0°
90°	0
80°	5
70°	10
60°	15
50°	20
40°	25
30°	30
20°	40
10°	50
0°	60
90°	1

ZONAL LUMENS		
0-10	49	10%
0-20	175	35%
0-30	322	65%
0-40	422	85%
0-60	476	96%
0-80	493	99%
0-90	496	100%
Total Lumens	496	100%

Delivered Lumens: 496  
Luminaire Watts: 9.1  
LER: 55

CP @ 0° (Nadir): 537  
Direct Beam Angle: 57.4°  
CRI: 83