


CF06XXUDPC 40LMDCL 40LMDNL 35KXX XXMW (IND/DIR Damp location)

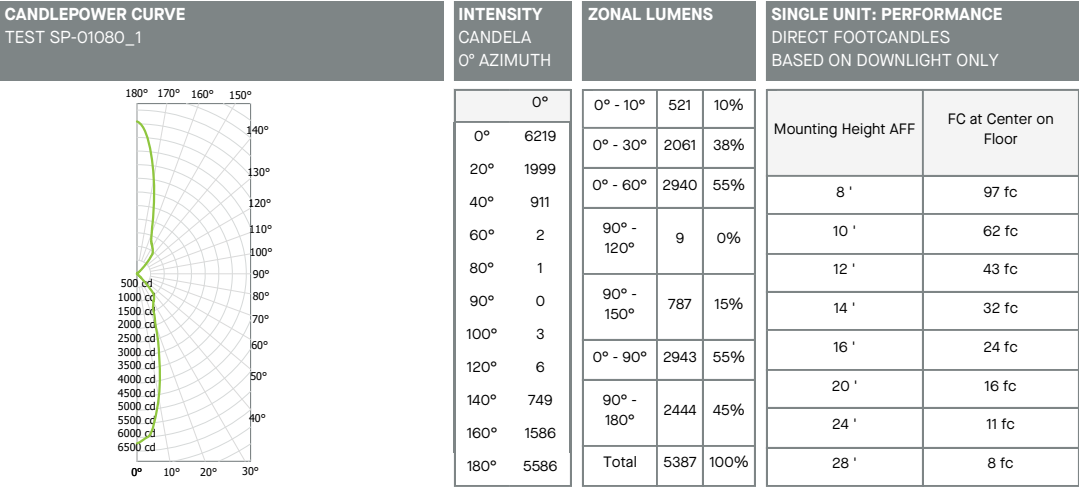

Delivered Lumens: 5387

CP at 0° (Nadir): 6219

Lumen Multiplier: 10L x 0.25, 15L x 0.37, 20L x 0.50, 30L x 0.75

CCT Multiplier: 27K x 0.97, 30K x 0.98, 40K x 1.04, 27HK x 0.78, 30HK x 0.82

See Page 1 for System Watts for all outputs

Luminaire Watts: 54.8

LER: 98.30

CRI: 80

