

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SR8SQLEDOA-34W35KE1-FT0808MWFO.IES
DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 1405211008-003
 [TESTLAB] Intertek
 [ISSUE DATE] 6/ 9/2014
 [MANUFAC] SPECTRUM LIGHTING
 [LUMCAT] SR8SQLEDOA-34W-35K-E1-FT0808-MW-FO
 [LUMINAIRE] 8" SQUARE LENSED LED RECESSED DOWNLIGHT
 [LAMP] N/A, >80 CRI
 [LAMPCAT] N/A
 [OTHER] 120.01 VAC, 290.74 mA, 34.736 W, 0.9955 PF
 [OTHER] OUTPUT MULTIPLIERS FOR OTHER CCT's: 27K, 30K, 40K, 50K x 1.0

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1442
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	42
Total Luminaire Watts	34.7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.20
Spacing Criterion (Diagonal)	1.32
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.52 ft
Luminous Width (90-270)	0.52 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	18819	18768	18543
55	17501	17563	17092
65	16101	15734	15113
75	13430	13015	12462
85	9537	7392	7347

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SR8SQLEDOA-34W35KE1-FT0808MWFO.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0.0	549.5	549.5	549.5	549.5	549.5
2.5	549.7	548.6	548.4	548.2	548.0
5.0	548.4	547.4	547.2	547.0	546.7
7.5	545.6	544.8	544.7	544.3	544.2
10.0	540.0	539.2	538.9	538.5	538.3
12.5	533.0	532.1	531.8	531.2	531.1
15.0	524.0	523.1	522.8	522.2	522.0
17.5	514.6	513.8	513.2	512.8	512.5
20.0	504.7	504.0	503.1	502.6	502.2
22.5	492.0	493.2	490.4	489.8	489.4
25.0	479.7	483.4	474.9	474.1	473.5
27.5	460.5	472.2	457.1	456.0	455.2
30.0	449.4	456.7	442.7	441.5	440.5
32.5	428.0	434.4	426.5	425.0	423.6
35.0	410.5	411.8	412.3	407.3	405.6
37.5	393.8	393.0	395.7	389.6	388.2
40.0	374.6	374.6	374.0	370.5	369.1
42.5	355.0	355.5	353.4	351.7	350.2
45.0	334.6	334.5	333.7	331.2	329.7
47.5	314.7	317.1	313.9	311.5	309.8
50.0	299.2	296.4	293.3	290.6	288.8
52.5	280.6	280.2	271.6	269.7	267.2
55.0	252.4	261.7	253.3	249.0	246.5
57.5	231.0	233.3	236.9	228.7	226.1
60.0	211.6	210.8	215.2	206.5	203.9
62.5	191.0	193.4	192.2	185.2	182.4
65.0	171.1	175.5	167.2	163.4	160.6
67.5	146.0	150.7	145.5	141.3	139.4
70.0	129.4	129.8	127.9	121.3	119.5
72.5	107.7	110.3	105.3	101.5	99.9
75.0	87.4	89.7	84.7	82.7	81.1
77.5	70.3	72.1	65.9	64.8	63.6
80.0	52.1	53.6	48.3	47.4	46.7
82.5	35.9	36.5	31.4	31.1	30.9
85.0	20.9	21.1	16.2	16.1	16.1
87.5	7.8	9.1	4.7	5.0	5.5
90.0	0.0	3.9	0.2	0.1	0.0
92.5	1.0	3.5	0.0	0.0	0.0
95.0	1.7	3.2	0.0	0.0	0.0
97.5	2.7	3.0	0.2	0.0	0.0
100.0	3.2	2.8	0.3	0.0	0.0
102.5	2.8	2.6	0.1	0.0	0.0
105.0	1.9	2.3	0.0	0.0	0.0
107.5	1.3	2.2	0.0	0.0	0.0
110.0	1.1	2.1	0.0	0.0	0.0
112.5	1.2	1.9	0.0	0.0	0.0
115.0	1.2	1.5	0.0	0.0	0.0
117.5	1.2	1.3	0.0	0.0	0.0
120.0	1.0	1.1	0.0	0.0	0.0
122.5	0.9	1.3	0.1	0.0	0.0
125.0	0.8	1.0	0.0	0.0	0.0
127.5	0.7	0.9	0.0	0.0	0.0
130.0	0.5	0.6	0.0	0.0	0.0
132.5	0.6	0.7	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SR8SQLEDOA-34W35KE1-FT0808MWFO.IES

CANDELA TABULATION - (Cont.)

135.0	0.5	0.5	0.0	0.0	0.0
137.5	0.3	0.4	0.0	0.0	0.0
140.0	0.2	0.2	0.0	0.0	0.0
142.5	0.1	0.1	0.0	0.0	0.0
145.0	0.1	0.1	0.0	0.0	0.0
147.5	0.1	0.0	0.0	0.0	0.0
150.0	0.0	0.0	0.0	0.0	0.0
152.5	0.0	0.0	0.0	0.0	0.0
155.0	0.0	0.0	0.0	0.0	0.0
157.5	0.0	0.0	0.0	0.0	0.0
160.0	0.0	0.0	0.0	0.0	0.0
162.5	0.0	0.0	0.0	0.0	0.0
165.0	0.0	0.0	0.0	0.0	0.0
167.5	0.0	0.0	0.0	0.0	0.0
170.0	0.0	0.0	0.0	0.0	0.0
172.5	0.0	0.0	0.0	0.0	0.0
175.0	0.0	0.0	0.0	0.0	0.0
177.5	0.0	0.0	0.0	0.0	0.0
180.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SR8SQLEDOA-34W35KE1-FT0808MWFO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	199.52	N.A.	13.80
0-30	419.04	N.A.	29.10
0-40	675.67	N.A.	46.90
0-60	1158.94	N.A.	80.40
0-80	1415.91	N.A.	98.20
0-90	1438.42	N.A.	99.80
10-90	1386.43	N.A.	96.20
20-40	476.15	N.A.	33.00
20-50	733.41	N.A.	50.90
40-70	649.08	N.A.	45.00
60-80	256.97	N.A.	17.80
70-80	91.15	N.A.	6.30
80-90	22.52	N.A.	1.60
90-110	2.08	N.A.	0.10
90-120	2.62	N.A.	0.20
90-130	2.94	N.A.	0.20
90-150	3.10	N.A.	0.20
90-180	3.10	N.A.	0.20
110-180	1.02	N.A.	0.10
0-180	1441.53	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	52.00
10-20	147.52
20-30	219.53
30-40	256.63
40-50	257.25
50-60	226.02
60-70	165.81
70-80	91.15
80-90	22.52
90-100	1.16
100-110	0.92
110-120	0.54
120-130	0.32
130-140	0.14
140-150	0.02
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : SR8SQLEDOA-34W35KE1-FT0808MWFO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84
2	99	91	85	79	97	89	83	78	86	81	76	82	78	74	79	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	68	63	70	66	62	60
4	83	71	63	56	81	70	62	56	67	60	55	65	59	54	63	58	53	51
5	77	64	55	48	74	63	54	48	61	53	48	59	52	47	57	51	47	44
6	71	58	49	42	69	57	48	42	55	47	42	53	46	41	52	46	41	39
7	66	52	44	38	64	51	43	37	50	43	37	48	42	37	47	41	37	35
8	61	48	39	34	60	47	39	33	46	38	33	44	38	33	43	37	33	31
9	57	44	36	30	56	43	36	30	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	52	40	33	27	39	32	27	38	32	27	37	31	27	25

POLAR GRAPH

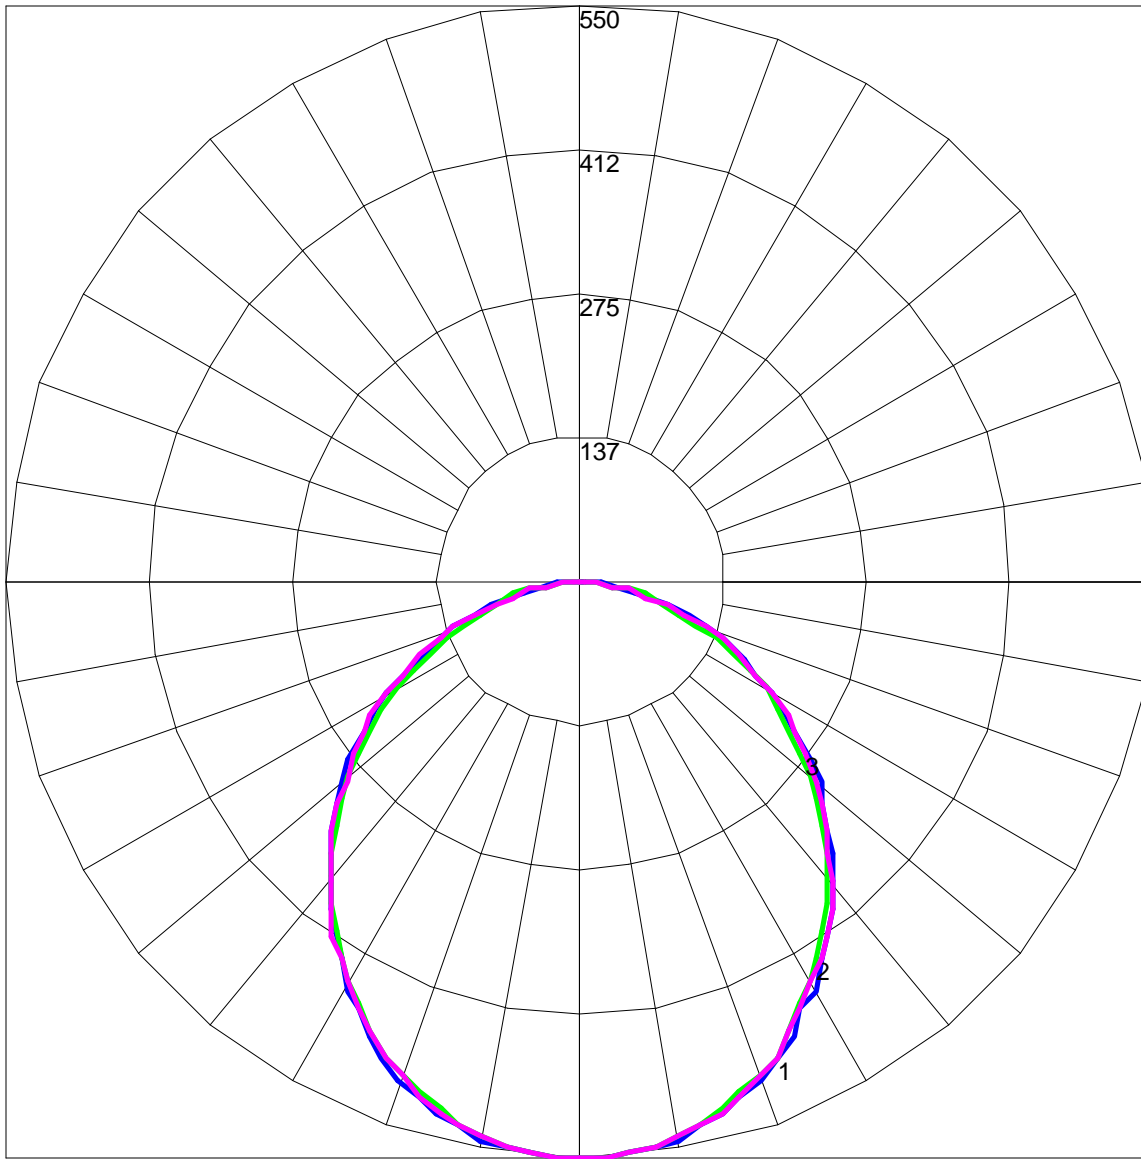

Maximum Candela = 549.7 Located At Horizontal Angle = 0, Vertical Angle = 2.5

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Vertical Plane Through Horizontal Angles (90 - 270)

3 - Vertical Plane Through Horizontal Angles (45 - 225)