

PT - Platinum Silver

TT1010INC AC - Anodic Champagne

TT1610INC MB - Matte Black

SERIES	ACCESSORIES ¹	MOUNTING ³	FINISH ⁶	WET KIT
TT0510INC TT1010INC TT1610INC	ENCLOSURES FJ1 ² 3"x6.5" Frosted Glass GJ1 3"x6.5" Clear Glass	WALL MOUNT CP6 ⁹ Wall Pipe Interface CP3 CP6 Decorative Cover	MW ⁷ Matte White MB ⁷ Matte Black PT ⁷ Platinum Silver CC Lustom Color	WLKA Wet Location Kit
	CG1 Cast Wire Guard	PA_4 SP90_4 Straight Arm CEILING MOUNT HM_9 Hang Straight Pendant	See Page 4 for Full Range of Color Options (83-90083)	
		AT_* Adjustable Length Hang Straight Pendant PM_* Pendant/Straight Mount CD_* Cord and Cable Mount CM_* Cord Mount		

EXAMPLE: TT1010INC/FJ1/CD36/CO

 NOTES:
 1 See Enclosures & Guards Page for Wire Guards and Additional Options
 2 Standard Enclosure
 3 See Mounting Pages Options and Details on Components and Finishes


 4 See Mounting Page for Available Arm Options
 5 Specify Length in Inches: See Mounting Page for Available Lengths
 6 See Color Page for More Options/Consult Factory for Special Finishes



ILLUMINATING WHAT'S POSSIBLE.



HOUSING DIMENSIONS



Dimensioned with TT1610INC

SERIES	Α	В
TT0510INC	7.5	10.7
TT1010INC	10.3	10.7
TT1610INC	16.5	10.7

SERIES SIZES





TT1610INC



APPLICATION

Tech Tier series for decorative general area lighting.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of classic lighting fixtures reimagined with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement. Available in three sizes.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

E26 Edison medium base 120V socket for incandescent or LED lamps.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

CODE COMPLIANCE


BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

MOUNTING & ACCESSORIES


SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING



CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY, ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION

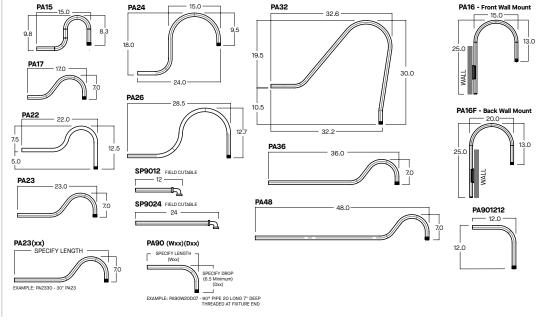

CEILING MOUNTING

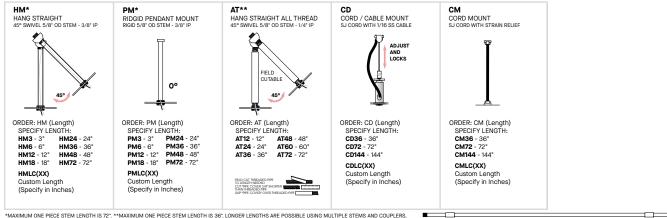

MAXIMUM ONE PIECE STEM LENGTH IS 72", **MAXIMUM ONE PIECE STEM LENGTH IS 36", LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



ILLUMINATING WHAT'S POSSIBLE.

COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR	TIER	COST	AVERAGE PAINT TIME*
Matte White, Textured White	Matte White	Matte White	Tier 1 - Standard Finishes	\$	Ū
Gloss White	Matte White	Gloss White	Tier 2 - Typical Finishes	\$\$	00
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black	Tier 3 - Special Metal Finishes	\$\$\$	000
All Others	Matte Black	Same Color as Fixture	Custom Color	Contact Factory	Contact Factory
Custom Color	Contact Factory	Contact Factory	*CONTACT FACTORY FOR SPECIFIC PRO	DUCT LEAD TIMES	

PAINT TIMES


TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY



*UNAVAILABLE FOR WET LOCATION

