



22" PRISMATIC DDH SERIES



PRDDH22GV

APPLICATION

22" Lumen series performance pendant for low and mid-bay applications. Prismatic refractor provides horizontal and vertical distribution.

FEATURES

Domed Fixture Housing (DDH) features a contemporary design that is easy to maintain. Single-stage optical system for smooth light distribution. 80 CRI minimum. Consult factory for high CRI or special applications. LED module and driver designed for ease of maintenance and replacement. Post-lock refractor retention ring will absorb shocks and impact. Optional safety cable. Variety of optical lenses and mounting methods.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available, consult factory.

CONSTRUCTION

Housing constructed of spun and fabricated aluminum to resist corrosion. Graphite gasket for optimal thermal management. Die-cast aluminum heat sink. Refractor made of cast UV stabilized acrylic.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

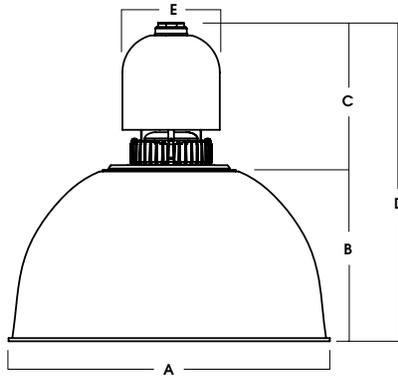

A	B	C	D	E
22.4	13.7	8.7	22.4	6.48
569.0 mm	348.0 mm	221.0 mm	569.0 mm	164.6 mm

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
PRDDH22GV15L	1500	1148	10	115
PRDDH22GV27L	2700	2003	18	111
PRDDH22GV37L	3700	2938	26	113
PRDDH22GV55L	5500	4327	39	111

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ³	OPTIONS ⁴	MOUNTING ⁵	REFRACTOR	DIFFUSER OPTIONS	FINISH ¹¹
PRDDH22GV	15L 1500 Lm	27K 2700K	EX Electronic Driver, 120V/277V	FS Fusing	HM ⁶ Hang Straight	DF22 22" Diffuse	DOOR DR22A ¹⁰ 22" Spun Door BC22 22" Band Clamp RS22 ⁹ 22" Refractor Shroud	MW ¹² Matte White MB ¹² Matte Black PT ¹² Platinum Silver CC Custom Color See Page 5 for Full Range of Color Options (83-90081)
	27L 2700 Lm	30K 3000K	DS10X 10% 0-10V, 120V/277V	E347 347V Driver	AT ⁸ Hang Straight All Thread	PR22 22" Clear		
	37L 3700 Lm	35K 3500K	DO10X 1% 0-10V, 120V/277V	SC1 Safety Cable	PM ⁶ Rigid Pendant	OP22 22" Opal		
	55L 5500 Lm	40K 4000K	DO103 1% 0-10V, 347V	SC2 Safety Cable, Refractor to Door	CD ⁶ Cord / Cable Mount			
					HC ^{6/7/8} Hook & Cord			
					NM2 ^{7/8/9} 1/2" NPT Hub			
					NM3 ^{7/8/9} 3/8" NPT Hub			
					EMERGENCY BATTERY OPTIONS			
					EMCR 10W Canopy Mounted EM			
					EMRM 7W Remote EM			
					EMEN 7W Remote with Enclosure			
							CN Conical Lens	
							CNFR Conical Frosted Lens	
							DL Drop Lens	
							FO White Optical Acrylic	
							PP Prismatic Polycarbonate	
							PC Clear Polycarbonate	
							WAG22 22" Wire Guard	

EXAMPLE: PRDDH22GV55L27KEX/HM36/PR22/DR22ACN/MW

NOTES:

1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K at 85 CRI with PR22 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches; See Mounting Page for Available Lengths 7 Mounting Supplied by Others 8 Not Available with EMCR 9 12" Leads Unless Specified 10 Same Finish as Housing 11 See Color Page for More Options/ Consult Factory for Special Finish 12 Standard Finishes



PROJECT: _____
QUANTITY: _____ TYPE: _____



22" PRISMATIC

DDH SERIES / FIXTURE OPTIONS



STANDARD FINISHES

MW
MATTE WHITE



MB
MATTE BLACK




PT
PLATINUM SILVER




MOUNTING TYPES

HM / AT / PM
HANG STRAIGHT / ALL THREAD / PENDANT




A	B
5.4	2.5
137.2 mm	63.5 mm

CD
CORD / CABLE MOUNT




A	B
5.0	.25
127.0 mm	6.4 mm

HC
HOOK CORD



A
4.2
106.7 mm

NM
NO MOUNT








MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF LUMEN MAX SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




MOUNTING TYPES

<p>HM* HANG STRAIGHT 45° SWIVEL 5/8" OD STEM - 3/8" IP</p>  <p>ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)</p>	<p>PM* RIGID PENDANT MOUNT RIGID 5/8" OD STEM - 3/8" IP</p>  <p>ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)</p>	<p>AT** HANG STRAIGHT ALL THREAD 45° SWIVEL 5/8" OD STEM - 1/4" IP</p>  <p>ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36"</p> 	<p>CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p>  <p>ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)</p>	<p>HC HOOK & CORD FOR INDEPENDENT MOUNTING</p>  <p>ORDER: HC</p>
--	---	--	---	---


*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY

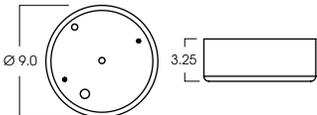

REMOTE EMERGENCY BATTERY OPTIONS

<p>EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p>  <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p>EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p>  <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY

ADDITIONS

FS - FUSING

Slow blow type fuse protects fixture against voltage surges. Factory installed.



LSP10 - SM - SURGE PROTECTOR

Surge protector absorbs transient electrical spikes and protects fixtures and electronics 120/277v. Re-sets after surge. Factory Installed.



SAFETY CABLE OPTIONS


SC1 - SAFETY CABLE

1/16" stainless steel safety cable for added support. Standard kit is 18" and double barrel locks are provided. Approved for California seismic requirements. Rated at 50 lbs.



SC2 - SAFETY CABLE

1/16" Stainless steel cable holds door to fixture




22" PRISMATIC

DDH SERIES / PHOTOMETRIC DATA



PRDDH22LEDGV-55L-35K-EX-PR22-BC22-CNFR-xx

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT								
			Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 1		RCR 3				
	0.00°		0° - 10°	193	4%	8.0'	31 fc	13.1'	15 fc	17'	16'	16	0.14	10	0.11
	0.00°	1,969	0° - 20°	818	19%	10.0'	20 fc	16.4'	9 fc	21'	18''**	15	0.13	12	0.13
	5.00°	1,939	0° - 30°	1,831	42%	12.0'	14 fc	19.7'	6 fc	25'	20''***	12	0.10	8	0.08
	10.00°	2,054	0° - 40°	2,822	65%	14.0'	10 fc	23.0'	5 fc	Delivered Illuminance Rating: (DIR)					
	15.00°	2,248	0° - 60°	3,660	85%	16.0'	8 fc	26.3'	4 fc	3' Suspension Length					
	20.00°	2,310	0° - 80°	3,860	89%	20.0'	5 fc	32.9'	2 fc	Square rooms used for multiple units:					
	30.00°	2,052	0° - 90°	3,918	91%	24.0'	3 fc	39.4'	2 fc	- RCR 1: Length & Width = Ceiling Ht. - 5.5' x 10.00					
	40.00°	1,094	Total	4,325	100%	28.0'	3 fc	46.0'	1 fc	- RCR 3: Length & Width = Ceiling Ht. - 5.5' x 3.33					
	50.00°	429								* Average Footcandles at 2.5' Above Floor					
	60.00°	178								* Exceeds spacing criteria by 3%					
	70.00°	89								** Exceeds spacing criteria by -14%					
	80.00°	64								*** Exceeds spacing criteria by -24%					
90.00°	52														

Delivered Lumens: 4,325
Luminaire Watts: 39
LER: 110.90

CP at 0deg (Nadir): 1,969
CRI: 80+

Beam Angle: 78.74
Spacing Ratio: 1.35

Lamp Multiplier: 15L x 0.27, 27L x 0.46, 37L x 0.68
CCT Multiplier: 40K X 1.03, 30K X 0.985, 27K X 0.971



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

