



WALL MOUNT
MINI CONCORDIA
DAMP / WET LOCATION
TIERS

PROJECT: _____
QUANTITY: _____ TYPE: _____



CN1308GV
MB - Matte Black



CN1308GV
PT - Platinum Silver



CN1308GV
AS - Anodic Sapphire



CN1308GV
AN - Anodic Natural

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES	MOUNTING ³	FINISH ⁴	WET KIT
CN1308GV	15L 1500 Lm	80 CRI	EX DS2W1 DS10X DO10X Electronic Driver, 120V/277V ELV/MLV, 120V 10%, 0-10V, 120V/277V 1%, 0-10V, 120V/277V	FJO 2" Frosted Tall	CP104 CP104KO CP6/RMD SP ⁴ EMRM EMEN Small Driver Canopy Small Driver Canopy w/ Knockouts Remote Mount Driver Straight Arm Mounting 7W Remote EM 7W Remote with Enclosure	MW ⁶ Matte White	WLKA Wet Location Kit
		27K 2700K				MB ⁶ Matte Black	
		30K 3000K				PT ⁶ Platinum Silver	
		35K 3500K				CC Custom Color	
		40K 4000K				See Page 5 for Full Range of Color Options (83-90083)	
		90 CRI					
		27HK 2700K					
		30HK 3000K					
		35HK 3500K					
		40HK 4000K					

EXAMPLE: CN1308GV15L35KEXFJO/CP104SP10RD

NOTES:
1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes
4 See Mounting Page for Available Arm Options 5 See Color Page for More Options/Consult Factory for Special Finishes 6 Standard Finishes






WALL MOUNT MINI CONCORDIA DAMP / WET LOCATION TIERS

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
CN1308GV15L	1500	605	10	61

1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS

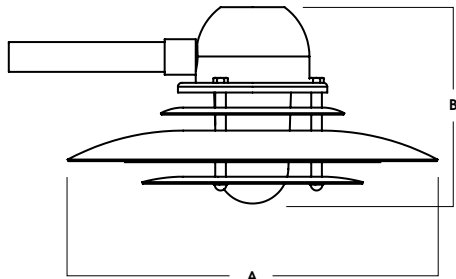

A	B
13.0 230.2 mm	6.9 175.3 mm

APPLICATION

The Wall Mount Mini Concordia is one of our most elegant RLM styles.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of Classic lighting fixtures reimagined with modern LED light sources and materials. The wide range of options for illumination and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are cast aluminum with stainless steel hardware.

CODE COMPLIANCE


BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

SP

MOUNTING ARM STYLE

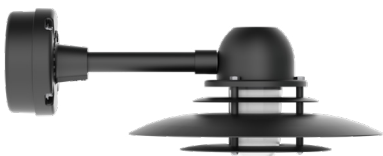

CN1308GV SHOWN WITH CP104SP12



Spectrum Lighting



WALL MOUNT MINI CONCORDIA DAMP / WET LOCATION TIERS / PHOTOMETRIC DATA

CN1308 15L 35K XX FJ0

CANDLEPOWER CURVE TEST SP-01025	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE		MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
	0.00°	0° - 20°	75	12%	Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4					
	0.00° 237	20° - 50°	184	30%	6.5 '	6 fc			FC +	W/Sq. Ft.	FC +	W/Sq. Ft.				
	20.00° 164	50° - 80°	183	30%	7.5 '	4 fc	9'	4'	31	0.65	17	0.48				
	40.00° 85	80° - 90°	78	13%	8.5 '	3 fc	12'	6'	13	0.27	7	0.20				
	50.00° 49	0° - 90°	520	86%	10.0 '	2 fc	16'	8'	8	0.16	6	0.16				
	60.00° 49	90° - 120°	80	13%	12.0 '	2 fc	Delivered Illuminance Rating: (DIR)		47 FC per W/Sq. Ft.		37 FC per W/Sq. Ft.					
	80.00° 86	120° - 150°	4	1%	14.0 '	1 fc	1' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 + Average Footcandles at 2.5' Above Floor									
	90.00° 55	Total	605	100%	16.0 '	1 fc										
	100.00° 34				20.0 '	1 fc										
	110.00° 13															
	120.00° 4															
	140.00° 1															
	160.00° 1															
	180.00° 1															
Delivered Lumens: 605 Luminaire Watts: 10 LER: 60.50	CP at 0deg (Nadir): 237 CRI: 80+	Lumen Multiplier: Only 15L offered CCT Multiplier: 27K x 0.97, 30K x 0.99, 40K x 1.03														


MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING

CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX



CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.


SP(xx) 6", 12" & 24"
Designed for Straight Arm Mounting

SPECIFY LENGTH

EXAMPLE: SP6 - STRAIGHT PIPE 6" LONG


REMOTE EMERGENCY BATTERY OPTIONS

EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)



A	B	C
1.3	12.6	13.0

EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)



A	B	C
2.0	17.0	6.2

*OTHER EM BATTERY SIZES AVAILABLE. CONTACT FACTORY.

COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	①
Tier 2 - Typical Finishes	\$\$	①①
Tier 3 - Special Metal Finishes	\$\$\$	①①①
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES

MW Matte White	GW Gloss White	PT Platinum Silver	MB Matte Black	GB Gloss Black	BZ Bronze

TIER 2 - TYPICAL FINISHES

TW Textured White	TB Textured Black	MT* Textured Silver	OB* Oil Rubbed Bronze	SN Sun Gold	CO Copper Metallic	BR Brecchia	GH Graphite	CH Charcoal	AL Almond	VE Verde Green
BL Blue Streak	RD Red Baron	OR Orange	CM Camel	PL Purple	PG Pub Green	TQ Turquoise	SF Sea Foam	PK Pink	AY Aero Yellow	EG Evergreen
LG Lime Green	LB Light Blue	BY Burgundy	AK Anodic Black	AM Anodic Malachite	AZ Anodic Bronze	AS Anodic Sapphire	AN Anodic Natural	AC Anodic Champagne		

TIER 3 - SPECIAL METAL FINISHES

GA* Galvanized	GF* Gold Flake

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

