

AIRCRAFT CABLE WITH CORD FEED INSTALLATION

NOTE: FIXTURE IS SHIPPED WITH WIRING COMPLETE READY TO INSTALL

1. INSTALL MOUNTING SYSTEM:



- A. THREAD CABLE THROUGH "GLIDER" AS SHOWN
- B. LOWER "GLIDER" (WITH CABLE & NIPPLE) THROUGH CENTER HOLE IN CANOPY. THREAD NIPPLE ONTO BACK OF GLIDER WITH CABLE INSTALLED.
- C. THREAD CABLE THROUGH CENTER OF FITTING AT TOP OF FIXTURE.
- D. MAKE NECESSARY CONNECTIONS
- E. SLIDE STRAIN RELIEF OVER CORD, SNAP CLOSED, INSTALL IN CANOPY.

2. INSTALL MOUNTING TO STRUCTURE

- A. THREAD NIPPLE (GLIDER AND CABLE ATTACHED) ONTO JUNCTION BOX MOUNTING STRAP.
- B. MOUNT STRAP SECURELY TO JUNCTION BOX (HARDWARE BY OTHERS)
- C. MAKE NECESSARY POWER CONNECTIONS BEING CERTAIN TO ATTACH GROUND TO GREEN SCREW ON MOUNTING STRAP.

3. ADJUST MOUNTING HEIGHT

- A. LOOSEN AND DEPRESS TOP OF AIRCRAFT CABLE FITTING TO ALLOW CABLE TO BE ADJUSTED.
- B. WHEN FIXTURE IS AT CORRECT MOUNTING HEIGHT, TIGHTEN TOP OF ADJUSTMENT

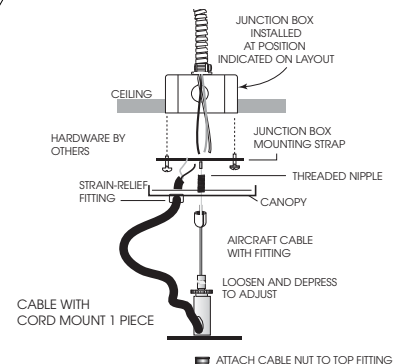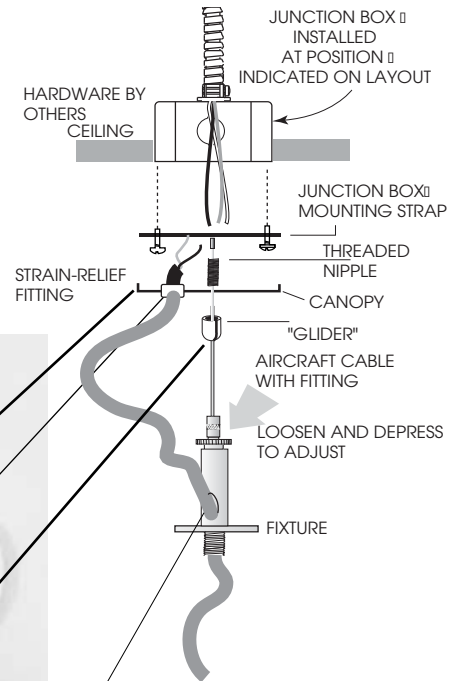

WARNING:
BE CERTAIN ALL POWER IS OFF. WIRE ACCORDING TO LOCAL AND NATIONAL CODES. THIS PRODUCT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN