

HIGH TOP PENDANT DAMP LOCATION

QUANTITY:	TYPE:
PROJECT:	

DOMO	SHADES



HT1813GV SN - Sun Gold GAI - Galvanized Interior



HT1813GV MW - Matte White MBI - Matte Black Interior



HT1813GV MB - Matte Black ALI - Almond Interior



HT1813GV PT - Platinum Silver BLI - Blue Streak Interior

SERIES	LUMENS ¹		LUMENS1		LUMENS1		LUMENS1		LUMENS1		LUMENS1		LUMENS ¹		LUMENS ¹		LUMENS1		LUMENS ¹		сст		DRIVER / DIMMING ²			MOUNTING ⁶	C	ORD OPTIONS	II	NTERIOR ¹⁰		FINISH ¹⁰								
HT1813GV	27L 37L	1500 Lm 2700 Lm 3700 Lm 5500 Lm	30K 35K	2700K 3000K 3500K 4000K	DO10X ³	Electronic Driver, 120V/277V 1%, 0-10V, 120V/277V ELV / MLV.120V	CP13 ^{4/5} HM_ ⁷	Small Driver Canopy Wire Bail / Cord Hang Straight Hang Straight All Thread	CW	White Black Silver	CCI	Matte White Custom Color Fixture Color Interior	PT ¹¹	Matte White Matte Black Platinum Silver Custom Color																										
					DLTE15	Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	PM_7 CD_7 CM_7 CHN_7 EMCR8	PM_7 Rigid Pendant Mount CD_7 Cord / Cable Mount CM 7 Cord Mount		DRATIVE CORDS ⁹ ee Page 5 for ative Braided Color Cords (83-90080)	for F	ee Page 5 Full Range of olor Options 33-90080)	fo (See Page 5 r Full Range of Color Options (83-90080)																										

EXAMPLE: HT1813GV15L35KEX/RDC5HM36PT


NOTES:
1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 RDC5 for EX/D010X Drivers 4 37L Max with RDC5, 55L Max with CPI3 5 CPI3 for Lutron Drivers 6 See Mounting Page for Details on Components and Finishes 7 Specify Length in Inches: See Mounting Page for Available Lengths 8 EMCR Replaces RDC5 or CPI3 9 Decorative Cord 120* Max Length 10 See Color Page for More Options/Consult Factory for Special Finishes 11 Standard Finishes





HIGH TOP PENDANT DAMP LOCATION **DOMO SHADES**

HOUSING DIMENSIONS



LUMENS / WATTAGE DATA								
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW				
HT1813GV15L	1500	1195	10	120				
HT1813GV27L	2700	2158	18	120				
HT1813GV37L	3700	3160	26	122				
HT1813GV55L	5500	4625	39	119				

1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K

APPLICATION

The High Top Pendant for wide area lighting.

FEATURES

Speclume series fixtures offer contemporary style with functional luminaire performance. Passive integral heat sink. LED module and drivers are replaceable and upgradable. Standard diffuser for visual comfort and to eliminate LED source visibility. A variety of mounting options are available.

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. Interior is Matte White unless specified. Custom Color interior finish

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

Fixtures constructed of machined and formed aluminum and door with lens option available. Carbon gasket for optimal thermal management.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

CEILING MOUNT

HT1813GV SHOWN WITH RDC5PM

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM HANG STRAIGHT / ALL THREAD / PENDANT







Spectrum Lighting



EXPRESS PENDANT

DAMP LOCATION

DOMO SHADES / PHOTOMETRIC DATA

TT1811GV-55L-35K-EX-MWI-PT-TF2


CANDLEPOWER CURVE	INTENSITY	ZONAL	ZONAL LUMENS SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE					80/50/2	LE UNITS: I 20% REFLE FOOTCAN	CTANC		PER SQI	JARE FOOT		
90°	0.00°	0° - 10°	0° - 10° 164 4%		Mounting FC	FC at	FC at	Ceiling	Fixture	RCR 2		RCR 4			
200 Gd 80°	0.00° 1,710		-		Height AFF	Center on Floor	Beam Diameter	Beam	Height	Spacing	FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	
400 cd	5.00° 1,699	0° - 20°	630	16%	AFF	OH FIOOI		Edge	14'	12' *	27	0.28	22	0.28	
	10.00° 1,678	0° - 30°	1,338	33%	6.0 '	48 fc	16.0'	17 fc	18'	14' "	21	0.21	11	0.14	
600 cd	15.00° 1,655	0 - 30	1,336	33%	8.0 '	27 fc	21.3	9 fc	22'	16' ***	12	0.13	14	0.18	
800_cd 50°	20.00° 1,616	0° - 40°	2,184	54%	10.0 '	17 fc	26.6	6 fc		Delivered					
1000.cd	30.00° 1,452								Illuminance 97 FC per W/Sq. Ft. 78 FC per W/Sq Rating: (DIR)			per W/Sq. Ft.			
1200 cd	40.00° 1,266	0° - 60°	3,704	91%	12.0 '	12 fc	32.0 '	4 fc	2' Suspension Length						
	50.00° 1,040	0° - 80°	4.028	99%	14.0 '	9 fc	37.3 '	3 fc	Square rooms used for multiple units:						
1400 cd	60.00° 385		.,		16.0	7 fc	42.6 '	2 fc	Average Footcandles at 2.5' Above Floor						
1600.cd 30°	70.00° 142	0° - 90°	4,052	100%	20.0 '	4 fc	53.3 '	1 fc					Floor		
1800.cd	80.00° 63				20.0	4 IC	33.3	TIC		eds spacing					
0° 10° 20°	90.00° 0	Total	4,052	100%	24.0 '	3 fc	63.9 '	1 fc		eds spacin					
Delivered Lumens: 4,052 CP a	Delivered Lumens: 4,052 CP at Odeg (Nadir): 1,710					106.26		Lamp	Multiplier:	15L x 0.26	55, 27L x	0.463, 37L x 0.	68		
Luminaire Watts: 39 LER: 103.90	CRI:	85+		Spo	acing Ratio:	1.25		CCT	Multiplier:	27K x 0.9	71, 30K >	0.985, 40K x 1	.03		

MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECIALIZED REQUIREMENTS.





CEILING MOUNTING

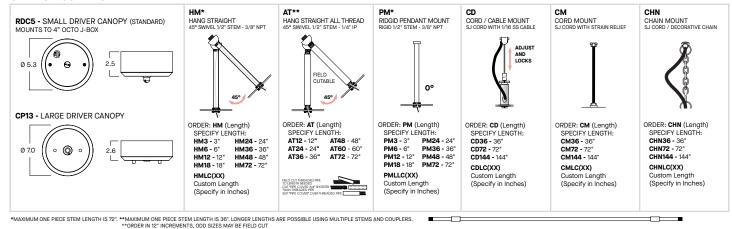

EMERGENCY BATTERY OPTIONS

REMOTE EMERGENCY BATTERY OPTIONS



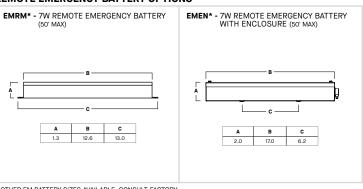

*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY



COLOR OPTIONS - POWDER COAT PAINT FINISHES



STANDARD CORD / STEM / CANOPY FINISHES

PAINT TIMES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR		
Matte White, Textured White	Matte White	Matte White		
Gloss White	Matte White	Gloss White		
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black		
All Others	Matte Black	Same Color as Fixture		
Custom Color	Contact Factory	Contact Factory		

COST	PAINT TIME*
\$	0
\$\$	00
\$\$\$	000
Contact Factory	Contact Factory
	\$ \$\$ \$\$\$

^{*}CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

CORD OPTIONS

STANDARD VINYL CORDS

CW
CB
White Black

DECORATIVE BRAIDED COLOR CORDS

CW White	CB Black	CS Silver
	$m_{\rm H}$	
HH	Ш	





















VE Verde Green

EG

Evergreen



TIER 1 - STANDARD FINISHES














TIER 2 - TYPICAL FINISHES

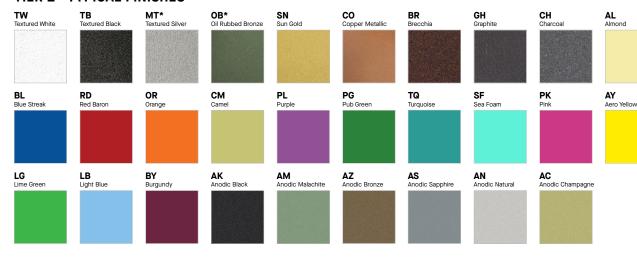

TIER 3 - SPECIAL METAL FINISHES







CUSTOM COLOR FINISHES

CONTACT FACTORY

CC Custom Color



^{*}UNAVAILABLE FOR WET LOCATION



^{**} UNAVAILABLE FOR INTERIOR