

**INCANDESCENT** 

CYLINDRO 6" / 8" PENDANT

R

SERIES	Α	В
CY0618RDFAINC	6.0	18.0
CY0820RDFAINC	8.0	20.0

SERIES	MOUNTING <sup>1</sup>			FINISH <sup>3</sup>	
CYO618RDFAINC CYO820RDFAINC	– HM_² AT_² PM_²	Cord and Cable Mount Hang Straight Pendant Hang Straight All Thread Pendant/Straight Mount Fuse Holder and Fuse	MW <sup>4</sup> MB <sup>4</sup> PT <sup>4</sup> CC <sup>4</sup>	Matte Black	
				See Page 3 for Full Range of Color Options (83-90081)	

### EXAMPLE: CY0820RDFAINC/HM72MW

NOTES: 1 See Mounting Pages Options and Details on Components and Finishes 2 Specify Length in Inches: See Mounting Page for Available Lengths 3 See Color Page for More Options/Consult Factory for Special Finishes 4 Standard Interior Finish

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



QUANTITY:

TYPE:

# **CY-RDFAINC**

### APPLICATION

Cylindro 6" and 8" Pendant features a clean design for a variety of architectural area lighting applications. INC Series is designed for indoor damp locations.

### FEATURES

Speclume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Cylindro series acrylic pendants are fabricated from opal acrylic. The opal shade glows warmly with no lamp image. A variety of finishes and mounting is available. Available in two sizes.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

#### ELECTRONICS

E26 Edison medium base 120V socket for incandescent or LED lamps.

### CONSTRUCTION

Fixtures constructed of machined and formed aluminum and optical U.V. stabilized acrylic. CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750




# **MOUNTING & ACCESSORIES**

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECIAL SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



#### **CEILING MOUNTING**

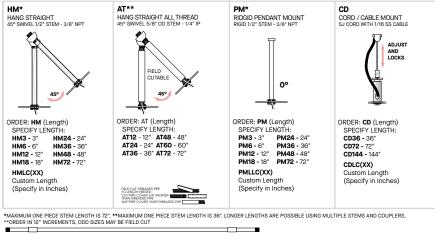



# **COLOR OPTIONS** - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

# **STANDARD CORD / STEM / CANOPY FINISHES**

- [	FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR	TIER	COST	AVERAGE PAINT TIME*
	Matte White, Textured White	Matte White	Matte White	Tier 1 - Standard Finishes	\$	0
	Gloss White	Matte White	Gloss White	Tier 2 - Typical Finishes	\$\$	00
- [	Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black	Custom Color	Contact Factory	Contact Factory
	All Others	Matte Black	Same Color as Fixture	*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES		
- [	Custom Color	Contact Factory	Contact Factory			

**PAINT TIMES** 

# **TIER 1 - STANDARD FINISHES**



# **TIER 2 - TYPICAL FINISHES**



## **CUSTOM COLOR FINISHES**

CONTACT FACTORY





\*UNAVAILABLE FOR WET LOCATION



ILLUMINATING WHAT'S POSSIBLE.

