

BET TRACK GUIDE



 Spectrum Lighting


ILLUMINATING WHAT'S POSSIBLE.

TRACK SPOT LIGHTS


EXCELLENT VARIETY OF SPOT TRACK FIXTURES WITH A WIDE RANGE OF OUTPUTS AND LENS OPTIONS.



 Spectrum Lighting

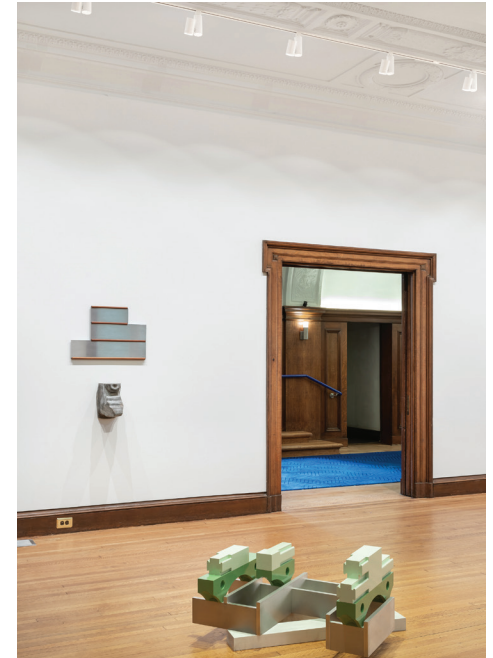


TSRA SPOT LIGHTS




TSRA25
2.5" TRACK SPOT LUMINAIRE WITH REGRESSED ARM

LUMENS: UP TO 1300L
KELVIN: 30, 35, 40
BEAM: XN, ND, MD, XW
COLOR: MATTE WHITE - MATTE BLACK



TSRA31
3" TRACK SPOT LUMINAIRE WITH REGRESSED ARM



LUMENS: UP TO 2100L
KELVIN: 30, 35, 40
BEAM: XN, ND, MD, XW
COLOR: MATTE WHITE - MATTE BLACK



TSRA35
3.5" TRACK SPOT LUMINAIRE WITH REGRESSED ARM


LUMENS: UP TO 2900L
KELVIN: 30, 35, 40
BEAM: XN, ND, MD, XW
COLOR: MATTE WHITE - MATTE BLACK

STT SPOT LIGHTS




STT25
2" SPOT TRACK LUMINAIRE

LUMENS: UP TO 1100L
KELVIN: 27, 30, 35, 40
BEAM: MD, WD
COLOR: MATTE WHITE - MATTE BLACK



STT3
3" SPOT TRACK LUMINAIRE

LUMENS: UP TO 2700L
KELVIN: 27, 30, 35, 40
BEAM: ND, MD, WD, XW
COLOR: MATTE WHITE - MATTE BLACK



STT4
4" SPOT TRACK LUMINAIRE

LUMENS: UP TO 3500L
KELVIN: 27, 30, 35, 40
BEAM: ND, MD, WD, XW
COLOR: MATTE WHITE - MATTE BLACK



TRACK WALL WASH / FLOOD

FOR BOTH SMALL AND LARGE AREAS TO WALL WASH OR FLOOD.




TWA5

5" WALL WASH TRACK LUMINAIRE

LUMENS: UP TO 3,000L

KELVIN: 30, 35

COLOR: MATTE WHITE - MATTE BLACK

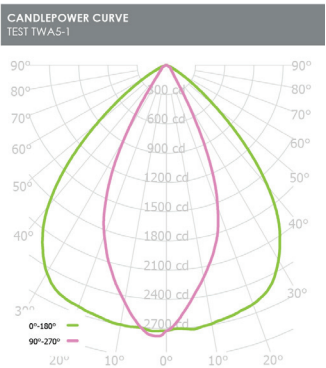


TWY7 - 50L

7" WALL WASH TRACK LUMINAIRE


LUMENS: UP TO 5,300 LM

KELVIN: 30, 35, 40

COLOR: MATTE WHITE - MATTE BLACK




0° POSITION




A	B	C
76	4.84	4.84
53.5 mm	65 mm	60 mm

SIDE VIEW




A	B	C
5.9	4.7	5.5
149.5 mm	120 mm	139.5 mm

0° POSITION




A	B
76	4.84
194.1 mm	122.9 mm


SIDE VIEW




A	B
6.89	7.11
175.0 mm	180.7 mm

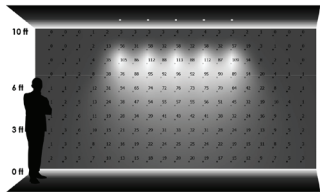


THREE LUMINAIRES
2'-0" away from wall
4'-0" on center

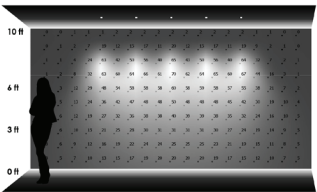

THREE LUMINAIRES
2'-6" away from wall
4'-0" on center

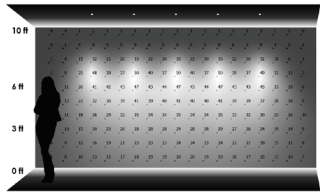

THREE LUMINAIRES
3'-0" away from wall
4'-0" on center

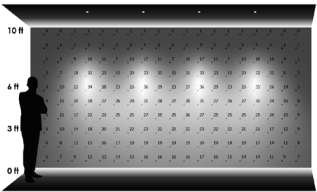


THREE LUMINAIRES
3'-6" away from wall
4'-0" on center




NINE LUMINAIRES
2'-0" away from wall
2'-0" between luminaires



SEVEN LUMINAIRES
2'-6" away from wall
2'-6" between luminaires

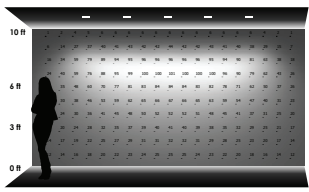

FIVE LUMINAIRES
3'-0" away from wall
3'-0" between luminaires

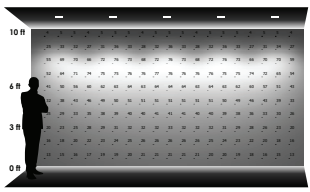

FIVE LUMINAIRES
3'-0" away from wall
4'-0" between luminaires



TWY7 FOR LIVING WALLS- 45L


7" WALL WASH PLANT LIGHT

LUMENS: UP TO 4,500 LM

KELVIN: 52


COLOR: MATTE WHITE - MATTE BLACK

0° POSITION



A	B
7.6	4.84
194.1 mm	122.9 mm

SIDE VIEW



A	B
6.89	7.11
175.0 mm	180.7 mm



5 LUMINAIRES
4' - 0" away from wall
4' - 0" between luminaires
15° tilt towards wall



5 LUMINAIRES
4' - 6" away from wall
4' - 0" between luminaires
15° tilt towards wall



5 LUMINAIRES
4' - 0" away from wall
4' - 0" between luminaires
20° tilt towards wall



5 LUMINAIRES
4' - 6" away from wall
4' - 0" between luminaires
20° tilt towards wall



TRACK LINEAR


FITS SEAMLESSLY ON BET TRACK AND AVAILABLE WITH FOUR UNIQUE FIELD CHANGEABLE LENS OPTIONS, ALONG WITH ADDITIONAL ACCESSORIES INCLUDING A VISOR AND A BLADE LOUVER.



STL2


2' LINEAR TRACK FIXTURE

LUMENS: UP TO 2,000L (1,000L PER FOOT)
KELVIN: 30, 35, 40
LENS: NF, LW, LA, WF, DW
COLOR: MATTE WHITE - MATTE BLACK

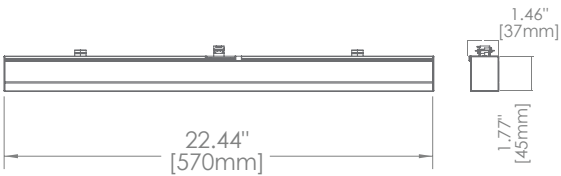


LENS OPTIONS


DW - Diffuser




NF - Narrow Flood




LW - Double Asymmetrical



LA - Single Asymmetrical



WF - Wide Flood



ACCESSORIES

BLW/BLB | Blade Louver

Fits with all lenses. Adds additional shielding to any single lens option.



Blade Louver installs into two internal channels located below lensing.

VS | Visor

For use with wall wash or other lens where extra visual shielding is required.



Visor installs into exterior channels on either side of the fixture.

LWW/LVB | Blade Louver & Visor


Fits with all lenses. Adds maximum shielding to any lens.



Blade Louver installs into two internal channels located below lensing. Visor installs into exterior channels on either side of the fixture.

STL2-20L-30HK-DW-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-5



Delivered Lumens: 1771
Luminaire Watts: 20.38
LER: 86.90

STL2-20L-30HK-NF-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-4



Delivered Lumens: 1792
Luminaire Watts: 20.32
LER: 88.19

STL2-20L-30HK-LW-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-3



Delivered Lumens: 1477
Luminaire Watts: 20.31
LER: 82.57

STL2-20L-30HK-LA-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-2



Delivered Lumens: 1632
Luminaire Watts: 20.37
LER: 80.04

STL2-20L-30HK-WF-xx-xx-MW

CANDLEPOWER CURVE
TEST STL2-1



Delivered Lumens: 1542
Luminaire Watts: 20.37
LER: 75.70



STL4



4' LINEAR TRACK FIXTURE

LUMENS: UP TO 4,000L (1,000L PER FOOT)

KELVIN: 30, 35, 40


LENS: NF, LW, LA, WF, DW

COLOR: MATTE WHITE - MATTE BLACK

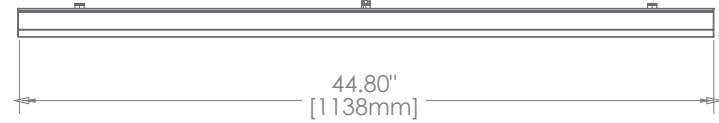


LENS OPTIONS


DW - Diffuser




NF - Narrow Flood




LW - Double Asymmetrical



LA - Single Asymmetrical



WF - Wide Flood



ACCESSORIES

BLW/BLB | Blade Louver

Fits with all lenses. Adds additional shielding to any single lens option.



Blade Louver installs into two internal channels located below lensing.

VS | Visor

For use with wall wash or other lens where extra visual shielding is required.



Visor installs into exterior channels on either side of the fixture.

LWW/LVB | Blade Louver & Visor


Fits with all lenses. Adds maximum shielding to any lens.



Blade Louver installs into two internal channels located below lensing. Visor installs into exterior channels on either side of the fixture.

STL4-40L-35HK-DW-xx-xx-MW


CANDLEPOWER CURVE
TEST STL4-6



Delivered Lumens: 3043
Luminaire Watts: 36.9
LER: 82.47

STL4-40L-35HK-NF-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-4



Delivered Lumens: 1792
Luminaire Watts: 20.32
LER: 88.19

STL4-40L-35HK-LW-xx-xx-MW


CANDLEPOWER CURVE
TEST STL2-3



Delivered Lumens: 1677
Luminaire Watts: 20.31
LER: 82.57

STL4-40L-35HK-LA-xx-xx-MW


CANDLEPOWER CURVE
TEST STL4-7



Delivered Lumens: 3309
Luminaire Watts: 37.76
LER: 87.63

STL4-40L-35HK-WF-xx-xx-MW

CANDLEPOWER CURVE
TEST STL4-10




Delivered Lumens: 3653
Luminaire Watts: 37.04
LER: 98.62

TRACK PENDANTS


ADD FUNCTION AND FUN TO YOUR INSTALLATION WITH THESE SPECTRUM FIXTURES.



 Spectrum Lighting

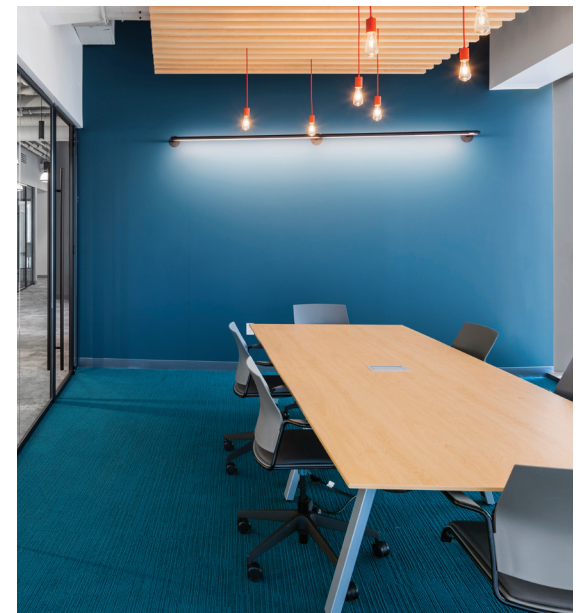


LED LAMP ONLY




DSP
DECORATIVE SOCKET PENDANTS

LED LAMP ONLY
COLOR: A LARGE VARIETY OF FINISHES ARE AVAILABLE
SEE SPEC SHEET FOR FULL RANGE OF COLORS



WSINC 12" 14" 16"
WAREHOUSE SHADE LED LAMP

LED LAMP ONLY
COLOR: A LARGE VARIETY OF FINISHES ARE AVAILABLE
SEE SPEC SHEET FOR FULL RANGE OF COLORS




GPRF 12" & 16"
GIANT GLOBE RADIUS FITTER PENDANT

LED LAMP ONLY
COLOR: A LARGE VARIETY OF FINISHES ARE AVAILABLE
SEE SPEC SHEET FOR FULL RANGE OF COLORS




LED INTEGRAL




CR2
2" LED CYLINDER

LUMENS: UP TO 2,320 LM
KELVIN: 30, 35, 40
COLOR: MATTE WHITE - MATTE BLACK



GAMMA
4" & 6" ROUND DIRECT

LUMENS: UP TO 1,100 LM / 3,100 LM
KELVIN: 27, 30, 35, 40
COLOR: MATTE WHITE - MATTE BLACK



DDS12GV
12" LUMEN MAX GV PERFORMANCE PENDANT

LUMENS: UP TO 2,500 LM
KELVIN: 27, 30, 35, 40
COLOR: MATTE WHITE - MATTE BLACK
PLATINUM SILVER - CUSTOM COLOR




BET MOUNTING & ACCESSORIES

SURFACE, PENDANT OR CABLE MOUNT BET IS EASY TO USE. I-BEAM CONSTRUCTION MEANS NO TWISTING OR BENDING OF TRACK ONCE INSTALLED.



TRACK

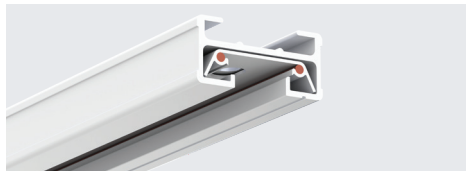

BETO2WH
2" TRACK MATTE WHITE

BETO2BK
2" TRACK MATTE BLACK

BETO4WH
4" TRACK MATTE WHITE


BETO4BK
4" TRACK MATTE BLACK

BETO6WH
6" TRACK MATTE WHITE

BETO6BK
6" TRACK MATTE BLACK

BETO8WH
8" TRACK MATTE WHITE

BETO8BK
8" TRACK MATTE BLACK

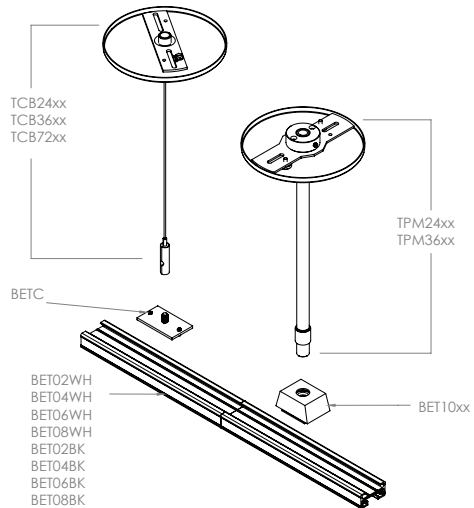


SEE INDIVIDUAL SPECIFICATION SHEETS FOR MORE DETAILED INFORMATION.


TRACK ACCESSORIES



BET13
CONDUIT END FEED

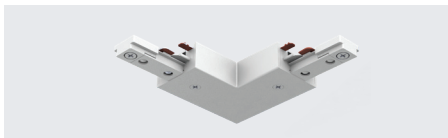

BET34
FEEDABLE "L" CONNECTOR

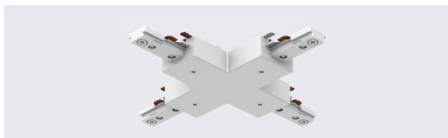

BET38
FEEDABLE "X" CONNECTOR




BET90
FLOATING CANOPY



BET11CL
END FEED/CURRENT LIMITER 2 AMP




TMP24 & TMP36
(BET10 REQUIRED)
24" STEMS/CANOPY
36" STEMS/CANOPY




BET10
(REQUIRED WHEN ORDERING TMP24/36)
THREADED ROD MOUNTING KIT



BET11 & BET44
TOP ACCESS END FEED
TOP ACCESS END FEED (REVERSED POLARITY)

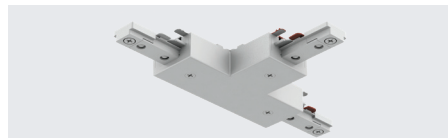


BET40
FEEDABLE "T" CONNECTOR

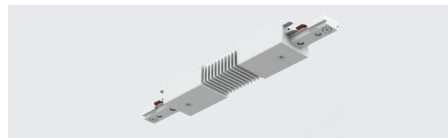

BET92
FLEXIBLE CONDUIT CONNECTION



BET70
MONO POINT

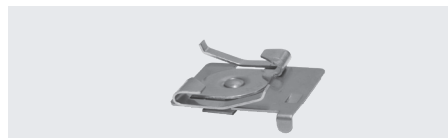

BET12S
T-BAR HANGER



CB CABLE ONLY
(BETC REQUIRED)
24" AC CABLE
36" AC CABLE
72" AC CABLE



BETC
(REQUIRED WHEN ORDERING CB CABLE ONLY - TCB)
BET TRACK CLIP BASE



BET21
MINI "I" CONNECTOR




BET14
LONG CONNECTOR/CENTER FEED



BET41
(END CAPS ARE INCLUDED WITH TRACK)
END CAP



BET100
ADAPTER FOR CORD

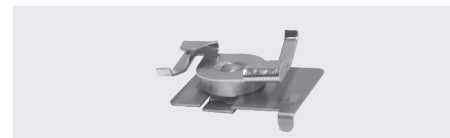

BET12D
DEEP T-BAR HANGER



BET EXTENSION ROD
12" LINE VOLTAGE FIXTURE EXTENSION
18" LINE VOLTAGE FIXTURE EXTENSION
24" LINE VOLTAGE FIXTURE EXTENSION
36" LINE VOLTAGE FIXTURE EXTENSION
48" LINE VOLTAGE FIXTURE EXTENSION

OTHER AVAILABLE SYSTEMS & ADAPTORS

SEE SPECLIGHT.COM FOR MORE INFORMATION



OT2D/HOT2D

SURFACE / SUSPENDED / RECESSED
2 CIRCUIT / 2 NEUTRAL
120V / 277V, 0-10V



TEK100/HTEK100

SURFACE / SUSPENDED
2 CIRCUIT / 2 NEUTRAL
120V / 277V



TP3

SURFACE / SUSPENDED
3 CIRCUIT / 2 NEUTRAL
120V

OTHER AVAILABLE ADAPTORS

SEE SPECLIGHT.COM FOR MORE INFORMATION



LOL



FITS LIGHTOLIER TRACK



GES66

FITS GES TRACK

FOR PROJECTS THAT REQUIRE HIGHER OUTPUT OR MULTI-DIRECTIONAL LIGHTING, EXPLORE OUR RECESSED AND SURFACE MULTIPLES FIXTURES. AVAILABLE IN A VARIETY OF STYLES AND CONFIGURATIONS.

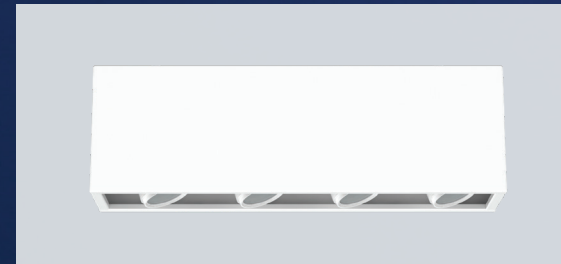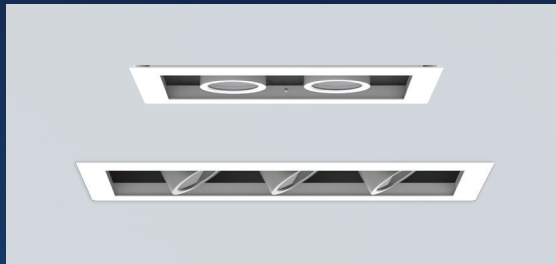

speclight.com • quotes@speclight.com • 508.678.2303 • 994 Jefferson St. Fall River, MA 02721

