



QUINCY SERIES
DAMP / WET LOCATION
SUBWAY LINE

PROJECT: _____
QUANTITY: _____ TYPE: _____



NL1010GV
PG - Pub Green



NL1010GV
BY - Burgandy



NL1010GV
AC - Anodic Champagne



NL1010GV
OR - Orange

SERIES	LUMENS ¹		CCT	DRIVER / DIMMING ²		ACCESSORIES ⁴		MOUNTING ⁶		FINISH ⁹		WET KIT	
NL1008GV NL1010GV NL1012GV	15L 27L	1500 Lm 2700 Lm	80 CRI	EX DS2W1 DO10X DS10X DLTE1 ³ DL3EX ³	Electronic Driver, 120V/277V ELV/MLV, 120V 1%, 0-10V, 120V/277V 10%, 0-10V, 120V/277V Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	FJ1 ⁵ PJ3 AMJ1 RDJ1 BLJ1 GRJ1 SS1 BS1 CG1	3"x6.5" Frosted Glass 3"x6.5" Prismatic Glass 3"x6.5" Amber Glass 3"x6.5" Red Glass 3"x6.5" Blue Glass 3"x6.5" Green Glass Side Glass Shield Bottom Shield Cup Cast Guard	WALL MOUNT		MW ¹⁰ MB ¹⁰ PT ¹⁰ CC	Matte White Matte Black Platinum Silver Custom Color	WLKA	Wet Location Kit
			CP104 CP104KO					Small Driver Canopy Small Driver Canopy w/ Knockouts					
			CP106 CP6/RMD SP90 ⁷ PA ⁷					Large Driver Canopy Remote Mount Driver Straight Arm Mounting Arm Style					
			CEILING MOUNT										
			RDC5 CP13 HM ⁸ AT ⁸ PM ⁸ CD ⁸ CM ⁸					Small Driver Canopy Large Driver Canopy Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount					
		90 CRI								See Page 5 for Full Range of Color Options (83-90081)			
			27HK 2700K 30HK 3000K 35HK 3500K 40HK 4000K										

EXAMPLE: NL1008GV15L30KEXFJ1/CP104PA23BZ

NOTES:
1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP106/CP13 Only 4 Enclosure, Wire Guard Required - Choose One Option
5 Standard Enclosure 6 See Mounting Page for Details on Components and Finishes 7 See Mounting Page for Available Arm Options
8 Specify Length in Inches: See Mounting Page for Available Lengths 9 See Color Page for More Options/Consult Factory for Special Finishes 10 Standard Finishes





QUINCY SERIES


DAMP / WET LOCATION

SUBWAY LINE

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
NL1010GV15L	1500	1036	11	105
NL1010GV27L	2700	1808	18	99

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS



Dimensioned with NL1010GV Featuring FJ1 and CG1

SERIES	A	B
NL1008GV	8.1	10.6
NL1010GV	10.3	10.6
NL1012GV	12.5	10.6

APPLICATION

Quincy series for decorative area lighting.

FEATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement. Fixture available in three sizes.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

NL1008GV



NL1010GV




NL1012GV



ENCLOSURES


FJ1

3" FROSTED TALL




PJ3

3" PRISMATIC GLASS




AMJ1

3" AMBER GLASS




RDJ1

3" RED GLASS




BLJ1

3" BLUE GLASS




GRJ1

3" GREEN GLASS




SS1

3" SIDE SHIELD



BS1

3" BOTTOM CUP



WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

PA

MOUNTING ARM STYLE



NL1008GV SHOWN WITH PA23

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



NL1008GV SHOWN WITH RDC5PM

CD

CORD / CABLE MOUNT



NL1008GV SHOWN WITH RDC5CD

CM

CORD MOUNT



NL1008GV SHOWN WITH RDC5CM



QUINCY SERIES

DAMP / WET LOCATION

SUBWAY LINE / PHOTOMETRIC DATA

NL1008GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00937_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT									
	0.00°	0° - 20°	127	7%	Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		
	0.00° 385	20° - 50°	584	34%	6.5 '	9 fc			FC +	W/Sq. Ft.	FC +	W/Sq. Ft.	
	20.00° 305	50° - 80°	669	38%	7.5 '	7 fc	9'	6'	46	0.60	22	0.39	
	40.00° 320	80° - 90°	146	8%	8.5 '	5 fc	12'	8'	19	0.25	9	0.16	
	60.00° 256	0° - 90°	1,525	88%	10.0 '	4 fc	16'	10'	13	0.17	10	0.17	
	80.00° 155	90° - 120°	204	12%	12.0 '	3 fc	Delivered Illuminance Rating: (DIR)		75 FC per W/Sq. Ft.		57 FC per W/Sq. Ft.		
	90.00° 113	120° - 150°	12	1%	14.0 '	2 fc	1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 + Average Footcandles at 2.5' Above Floor						
	100.00° 83	Total	1,742	100%	16.0 '	2 fc							
	110.00° 44				20.0 '	1 fc							
	120.00° 16												
	140.00° 2												
	160.00° 2												
	180.00° 2												
	Delivered Lumens: 1,742 Luminaire Watts: 18.3 LER: 95.19	CP at 0deg (Nadir): 385 CRI: 80				Lumen Multiplier: 15L x 0.573 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03							

NL1010GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00938_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT												
	0.00°	0° - 20°	139	8%	Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4					
	0.00° 422	20° - 50°	648	36%	6.5 '	10 fc			FC +	W/Sq. Ft.	FC +	W/Sq. Ft.				
	20.00° 338	50° - 80°	688	38%	7.5 '	8 fc	9'	6'	48	0.60	23	0.39				
	40.00° 356	80° - 90°	135	7%	8.5 '	6 fc	12'	8'	20	0.25	10	0.16				
	60.00° 272	0° - 90°	1,610	89%	10.0 '	4 fc	16'	10'	13	0.17	10	0.17				
	80.00° 145	90° - 120°	187	10%	12.0 '	3 fc	Delivered Illuminance Rating: (DIR)		80 FC per W/Sq. Ft.		60 FC per W/Sq. Ft.					
	90.00° 105	120° - 150°	10	1%	14.0 '	2 fc	1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 + Average Footcandles at 2.5' Above Floor									
	100.00° 78	Total	1,809	100%	16.0 '	2 fc										
	110.00° 39				20.0 '	1 fc										
	120.00° 13															
	140.00° 2															
	160.00° 1															
	180.00° 1															

Delivered Lumens: 1,809
Luminaire Watts: 18.3
LER: 98.85

CP at 0deg (Nadir): 422
CRI: 80

Lumen Multiplier: 15L x 0.573
CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03

NL1012GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00939_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT								
	0.00°	0° - 20°	140	8%	Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4	
	0.00° 426	20° - 50°	646	36%					FC +	W/Sq. Ft.	FC +	W/Sq. Ft.
	20.00° 339	50° - 80°	686	38%	6.5 '	10 fc	9'	6'	48	0.60	23	0.39
	40.00° 354	80° - 90°	136	8%	7.5 '	8 fc	12'	8'	20	0.25	10	0.16
	60.00° 271	0° - 90°	1,608	90%	8.5 '	6 fc	16'	10'	13	0.17	10	0.17
	80.00° 146	90° - 120°	176	10%	10.0 '	4 fc	Delivered Illuminance Rating: (DIR) 1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 + Average Footcandles at 2.5' Above Floor					
	90.00° 106	120° - 150°	8	0%	12.0 '	3 fc						
	100.00° 73	Total	1,793	100%	14.0 '	2 fc						
	110.00° 34				16.0 '	2 fc						
	120.00° 10				20.0 '	1 fc						
	140.00° 1											
	160.00° 1											
	180.00° 1											

Delivered Lumens: 1,793
Luminaire Watts: 18.3
LER: 97.98

CP at 0deg (Nadir): 426
CRI: 80

Lumen Multiplier: 15L x 0.573
CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING

CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED
NOT AVAILABLE W/ PA16 & PA16F




CP106 - LARGE DRIVER CANOPY
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

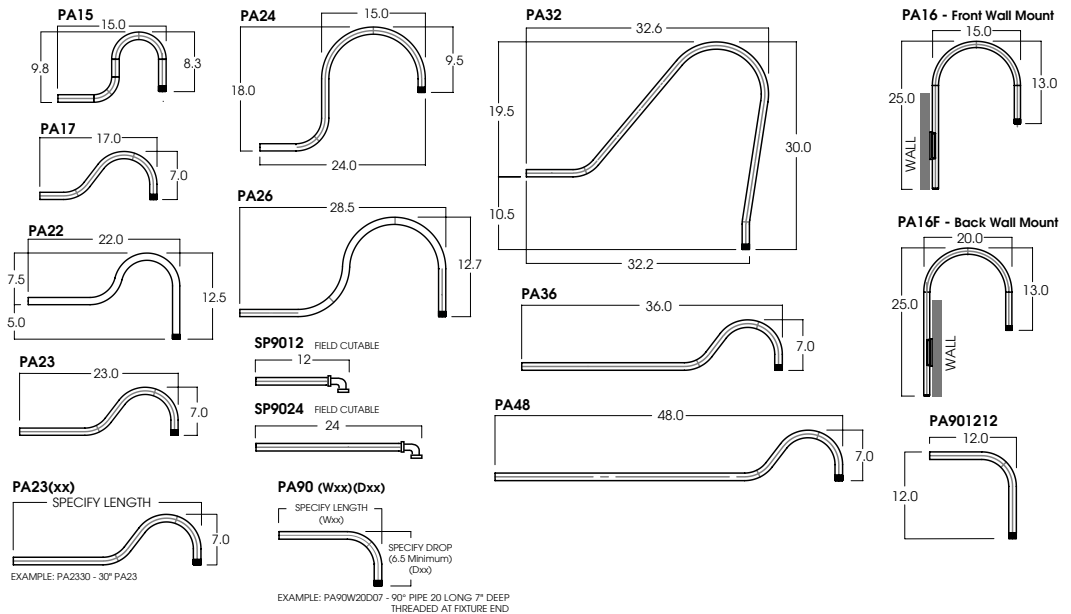


CEILING MOUNTING


RDC5 - SMALL DRIVER CANOPY (STANDARD)
MOUNTS TO 4" OCTO J-BOX



CP13 - LARGE DRIVER CANOPY



HM*
HANG STRAIGHT
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)
SPECIFY LENGTH:
HM3 - 3" HM24 - 24"
HM6 - 6" HM36 - 36"
HM12 - 12" HM48 - 48"
HM18 - 18" HM72 - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

PM*
RIGID PENDANT MOUNT
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)
SPECIFY LENGTH:
PM3 - 3" PM24 - 24"
PM6 - 6" PM36 - 36"
PM12 - 12" PM48 - 48"
PM18 - 18" PM72 - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

AT**
HANG STRAIGHT ALL THREAD
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)
SPECIFY LENGTH:
AT12 - 12"
AT24 - 24"
AT36 - 36"
AT48 - 48"
AT60 - 60"
AT72 - 72"
FIELD CUTTABLE
FIELD CUT THREADED PIPE TO LENGTH NEEDED
CUT PIPE COVER 3/8" SHORTER
THAN THREADED PIPE
SUPPLY COVER COVER THREADED PIPE

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD WITH STRAIN RELIEF



ORDER: CM (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	①
Tier 2 - Typical Finishes	\$\$	①①
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES

MW Matte White	GW Gloss White	PT Platinum Silver	MB Matte Black	GB Gloss Black	BZ Bronze

TIER 2 - TYPICAL FINISHES

TW Textured White	TB Textured Black	MT* Textured Silver	OB* Oil Rubbed Bronze	SN Sun Gold	CO Copper Metallic	BR Brecchia	GH Graphite	CH Charcoal	AL Almond	VE Verde Green
BL Blue Streak	RD Red Baron	OR Orange	CM Carmel	PL Purple	PG Pub Green	TQ Turquoise	SF Sea Foam	PK Pink	AY Aero Yellow	EG Evergreen
LG Lime Green	LB Light Blue	BY Burgundy	AK Anodic Black	AM Anodic Malachite	AZ Anodic Bronze	AS Anodic Sapphire	AN Anodic Natural	AC Anodic Champagne		

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

