



CLEAR TRIPLEX ITALIAN GLASS

GV SERIES / 2700 LUMENS

PROJECT: _____

QUANTITY: _____ TYPE: _____

CX1504LEDGV

APPLICATION

Piazza CX Series Italian glass LED surface luminaire for decorative area lighting.

FEATURES

Clear inner layer, opal center, clear outer layer for brighter finish. Integral aluminum heatsink dissipates heat. 50,000 hours rated LED system life. Wall, ceiling, or pendant mounting.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive aluminum heatsink for optimal thermal management. Glass made in Italy, fixture made in the USA.

CODE COMPLIANCE

BAA Compliant. ETL listed for damp locations. ADA Compliant. Manufactured and tested to UL Standard No. 1598/8750.

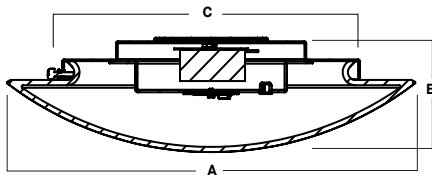

| A | B | C |
|---------|---------|----------|
| 14.5 | 4.0 | 6.8 |
| 368.3mm | 101.6mm | 172.72mm |

| WATTAGE TO LUMENS UPDATE | | |
|--------------------------|----------------------------|--------------|
| PART NUMBER | SOURCE LUMENS ¹ | SYSTEM WATTS |
| CX1504LEDGV15L | 1500 | 9 |
| CX1504LEDGV27L | 2700 | 16 |

| SERIES | LUMENS ¹ | CCT | DRIVER / DIMMING ² | OPTIONS ³ | MOUNTING ⁴ | FINISH ⁶ |
|--------------------|--|--|--|--|---|--|
| CX1504LEDGV | 15L 1500 Lm 27L 2700 Lm | 27K 2700K 30K 3000K 35K 3500K 40K 4000K | EX Electronic Driver, 120V/277V DO10X 1% 0-10V Dimming, 120V/277V DS2W1 2 Wire, MLV Dimming, 120V DLTE1 Lutron 2 Wire Phase Dimming 120V Only | FS Fuse Holder and Fuse GS Ceiling Level Gasket | WM Wall Mount SM Surface Mount HM_5 Hang Straight PM_5 Rigid Pendant | MW ⁷ Matte White MB ⁷ Matte Black PT ⁷ Platinum Silver CC Custom Color |

EXAMPLE: CX1504LEDGV15L35KEXGSSMMW

NOTES:
 1 Nominal Source Lumens at 3500K 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 See Mounting Page for Details on Components and Finishes 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 7 Standard Finishes

