

IES INDOOR REPORT**PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES****DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002
[TEST] 102560753CRT-008
[TESTLAB] Intertek
[ISSUE DATE] 09/19/2016
[UPDATE] 10/27/2016
[LAB-REF LUMCAT] CRT1609071034-005
[MANUFAC] Spectrum Lighting
[LUMCAT] SGE5LEDOS-30L-35K-EX-AR5223OS-SG-SO
[LUMINAIRE] 5" DIAM. LED DOWNLIGHT SEMI-DIFFUSE CLEAR ANODIZED CONE
[OTHER] SHALLOW PROFILE
[OTHER] REGRESSED, INTEGRAL SOLITE GLASS LENS
[OTHER] 60.2 DEGREE BEAM ANGLE
[LAMP] N/A
[LAMPCAT] N/A
[OTHER] TOTAL LUMINAIRE WATTS IS APPROXIMATE
[OTHER] PHOTOMETRIC MEASUREMENTS TAKEN AT 120VAC
[OTHER] CCT OUTPUT MULTIPLIERS: 40K x 1.0, 30K x 1.0, 27K x 0.945
[OTHER] THIS REPORT UPDATED BY SPECTRUM LIGHTING

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2466
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	90
Total Luminaire Watts	27.5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.90
Spacing Criterion (90-270)	0.90
Spacing Criterion (Diagonal)	0.92
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.42 ft (Diameter)
Luminous Width (90-270)	0.42 ft (Diameter)
Luminous Height	0.00 ft

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	25906	25939	25708
55	9676	9608	9486
65	331	294	202
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6
2.5	2629.7	2625.8	2627.8	2624.4	2625.2	2624.4	2627.8	2625.8	2629.7	2625.8
5.0	2595.6	2595.3	2596.0	2597.6	2597.5	2597.6	2596.0	2595.3	2595.6	2595.3
7.5	2543.5	2543.3	2546.2	2545.9	2545.2	2545.9	2546.2	2543.3	2543.5	2543.3
10.0	2471.6	2468.9	2468.7	2470.4	2474.6	2470.4	2468.7	2468.9	2471.6	2468.9
12.5	2376.4	2376.7	2376.1	2381.6	2383.5	2381.6	2376.1	2376.7	2376.4	2376.7
15.0	2268.9	2262.4	2267.3	2270.6	2272.4	2270.6	2267.3	2262.4	2268.9	2262.4
17.5	2140.8	2141.3	2139.3	2140.9	2144.4	2140.9	2139.3	2141.3	2140.8	2141.3
20.0	1999.1	1999.6	1999.6	1999.3	1997.2	1999.3	1999.6	1999.6	1999.1	1999.6
22.5	1846.1	1838.6	1840.8	1844.7	1840.7	1844.7	1840.8	1838.6	1846.1	1838.6
25.0	1686.5	1679.0	1681.1	1681.2	1679.5	1681.2	1681.1	1679.0	1686.5	1679.0
27.5	1518.9	1507.0	1508.3	1509.8	1510.2	1509.8	1508.3	1507.0	1518.9	1507.0
30.0	1330.0	1319.6	1319.2	1319.5	1321.3	1319.5	1319.2	1319.6	1330.0	1319.6
32.5	1119.9	1109.2	1105.1	1109.0	1113.8	1109.0	1105.1	1109.2	1119.9	1109.2
35.0	893.7	886.7	888.6	890.2	888.8	890.2	888.6	886.7	893.7	886.7
37.5	676.0	671.8	675.8	676.6	669.8	676.6	675.8	671.8	676.0	671.8
40.0	486.1	483.4	488.4	486.6	480.5	486.6	488.4	483.4	486.1	483.4
42.5	336.7	337.3	337.6	336.9	333.8	336.9	337.6	337.3	336.7	337.3
45.0	236.0	237.1	236.3	236.2	234.2	236.2	236.3	237.1	236.0	237.1
47.5	173.4	172.8	172.5	172.9	170.4	172.9	172.5	172.8	173.4	172.8
50.0	130.3	129.5	129.0	128.9	127.1	128.9	129.0	129.5	130.3	129.5
52.5	97.7	97.6	97.2	96.5	95.7	96.5	97.2	97.6	97.7	97.6
55.0	71.5	71.3	71.0	70.5	70.1	70.5	71.0	71.3	71.5	71.3
57.5	49.5	49.5	49.4	48.9	48.5	48.9	49.4	49.5	49.5	49.5
60.0	30.3	30.0	30.2	29.6	28.8	29.6	30.2	30.0	30.3	30.0
62.5	13.0	12.7	12.9	12.3	11.8	12.3	12.9	12.7	13.0	12.7
65.0	1.8	1.6	1.6	1.3	1.1	1.3	1.6	1.6	1.8	1.6
67.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Vert. Angles **Horizontal Angles**

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6	2637.6
2.5	2627.8	2624.4	2625.2	2624.4	2627.8	2625.8	2629.7
5.0	2596.0	2597.6	2597.5	2597.6	2596.0	2595.3	2595.6
7.5	2546.2	2545.9	2545.2	2545.9	2546.2	2543.3	2543.5
10.0	2468.7	2470.4	2474.6	2470.4	2468.7	2468.9	2471.6
12.5	2376.1	2381.6	2383.5	2381.6	2376.1	2376.7	2376.4
15.0	2267.3	2270.6	2272.4	2270.6	2267.3	2262.4	2268.9
17.5	2139.3	2140.9	2144.4	2140.9	2139.3	2141.3	2140.8
20.0	1999.6	1999.3	1997.2	1999.3	1999.6	1999.6	1999.1
22.5	1840.8	1844.7	1840.7	1844.7	1840.8	1838.6	1846.1
25.0	1681.1	1681.2	1679.5	1681.2	1681.1	1679.0	1686.5
27.5	1508.3	1509.8	1510.2	1509.8	1508.3	1507.0	1518.9
30.0	1319.2	1319.5	1321.3	1319.5	1319.2	1319.6	1330.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES

CANDELA TABULATION - (Cont.)

32.5	1105.1	1109.0	1113.8	1109.0	1105.1	1109.2	1119.9
35.0	888.6	890.2	888.8	890.2	888.6	886.7	893.7
37.5	675.8	676.6	669.8	676.6	675.8	671.8	676.0
40.0	488.4	486.6	480.5	486.6	488.4	483.4	486.1
42.5	337.6	336.9	333.8	336.9	337.6	337.3	336.7
45.0	236.3	236.2	234.2	236.2	236.3	237.1	236.0
47.5	172.5	172.9	170.4	172.9	172.5	172.8	173.4
50.0	129.0	128.9	127.1	128.9	129.0	129.5	130.3
52.5	97.2	96.5	95.7	96.5	97.2	97.6	97.7
55.0	71.0	70.5	70.1	70.5	71.0	71.3	71.5
57.5	49.4	48.9	48.5	48.9	49.4	49.5	49.5
60.0	30.2	29.6	28.8	29.6	30.2	30.0	30.3
62.5	12.9	12.3	11.8	12.3	12.9	12.7	13.0
65.0	1.6	1.3	1.1	1.3	1.6	1.6	1.8
67.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
72.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
77.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	876.39	N.A.	35.50
0-30	1641.77	N.A.	66.60
0-40	2193.09	N.A.	88.90
0-60	2458.91	N.A.	99.70
0-80	2465.92	N.A.	100.00
0-90	2465.92	N.A.	100.00
10-90	2222.07	N.A.	90.10
20-40	1316.69	N.A.	53.40
20-50	1516.84	N.A.	61.50
40-70	272.83	N.A.	11.10
60-80	7.01	N.A.	0.30
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2465.92	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	243.85
10-20	632.54
20-30	765.38
30-40	551.32
40-50	200.15
50-60	65.67
60-70	7.01
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
 PHOTOMETRIC FILENAME : SGE5LEDOS-30L35KEX-AR5223OSSGSO.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80
4	96	89	83	79	95	87	82	78	85	81	77	83	79	76	81	78	75	74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	68
6	86	77	71	67	85	76	71	66	75	70	66	73	69	65	72	68	65	64
7	82	72	66	62	81	72	66	62	70	65	61	69	64	61	68	64	61	59
8	78	68	62	58	77	67	62	57	66	61	57	65	60	57	64	60	57	55
9	74	64	58	54	73	64	58	54	63	57	54	62	57	53	61	56	53	52
10	70	60	54	50	69	60	54	50	59	54	50	58	53	50	58	53	50	49

POLAR GRAPH

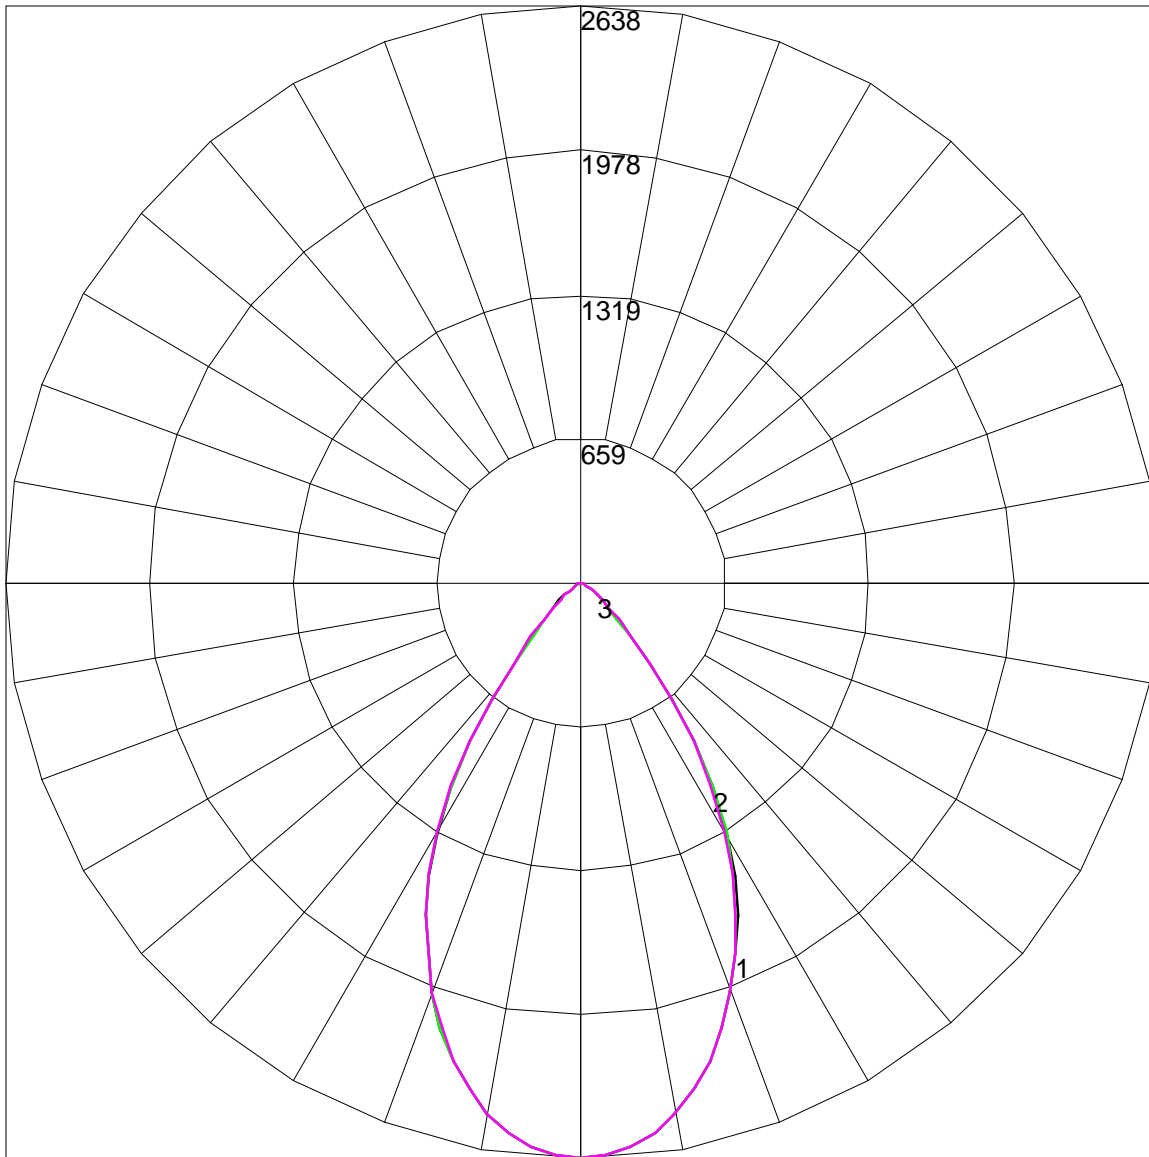

Maximum Candela = 2637.6 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180)

2 - Vertical Plane Through Horizontal Angles (90 - 270)

3 - Vertical Plane Through Horizontal Angles (45 - 225)