

PROJECT:		
QUANTITY:	TYPF:	



SERIES	ACCESSORIES ¹	MOUNTING ³	FINISH ⁶	WET KIT
RW1205INC RW1405INC	FJ1² 3°x6.5° Frosted Glass GJ1 3°x6.5° Clear Glass CG1 Cast Wire Guard	WALL MOUNT CP6* CP3 PA_* SP90_* CELLING MOUNT CELLING MOUNT HM_* AT_* STraight Pendant Adjustable Length Hang Straight Pendant PM_* CD_* CO_* CO_* CO_* CO_* CO_* CO_* COM_* COM	MW7 Matte White MB7 Matte Black PT7 Platinum Silver CC Custom Color See Page 4 for Full Range of Color Options (83-90083)	WLKA Wet Location Kit


EXAMPLE: RW1405INC/FJ1/HM36/AY

NOTES:
1 See Enclosures & Guards Page for Wire Guards and Additional Options 2 Standard Enclosure 3 See Mounting Pages Options and Details on Components and Finishes
4 See Mounting Page for Available Arm Options 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 See Color Page for More Options/Consult Factory for
5 Special Finishes 7 Standard Interior Finish





HOUSING DIMENSIONS



Dimensioned with RW2007INC

SERIES	A	В
RW1606INC	16.0	5.3
RW2007INC	20.0	6.4

APPLICATION

The Radial Wave is a classic RLM "Wave" style for decorative area lighting. INC Series is designed for indoor damp locations.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of early American lighting fixtures reimagined with modern INC light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. Available in two sizes.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior is Matte White unless specified.

ELECTRONICS

E26 Edison medium base 120V socket for incandescent or LED lamps.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are diecast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards, suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

WD1606INC







ENCLOSURES



GJ1 3" CLEAR GLASS



ENCLOSURE WIRE GUARDS



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING


CP6 - MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX





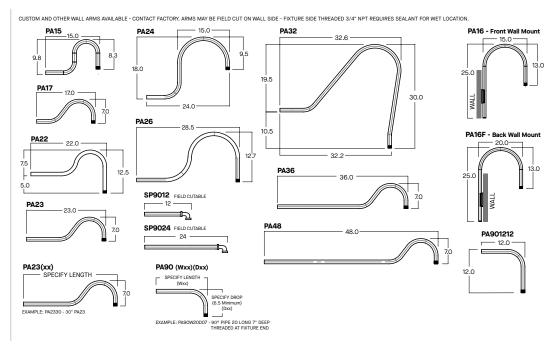

CEILING MOUNTING

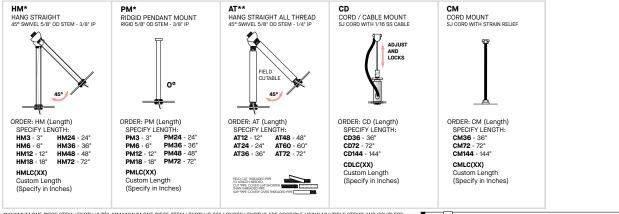

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36", LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	0
Tier 2 - Typical Finishes	\$\$	00
Tier 3 - Special Metal Finishes	\$\$\$	000
Custom Color	Contact Factory	Contact Factory

^{*}CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


TIER 1 - STANDARD FINISHES

GW Gloss White	PT Platinum Silver	MB Matte Black	GB Gloss Black	BZ Bronze

TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC Custom Color

CC

^{*}UNAVAILABLE FOR WET LOCATION