

Α	В
6.0	14.5
152.4 mm	368.3 mm

PRO. I	JF(;	

QUANTITY: TYPE:

DP7FGINC

APPLICATION

The Icon Pendant series features curved molded glass shade for decorative area lighting. INC Series is designed for indoor damp locations.

FEATURES

Speclume series fixtures offer contemporary style with functional luminaire performance. Icon pendants are available in 7" and 12" sizes. Decorative elements are available on some models. Separate finishes may be chosen for fixture and mounting. A variety of mounting and finish options available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS

E26 Edison medium base 120V socket for incandescent or LED lamps.

CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Shade is heavy wall molded cased glass with white opal inner layer and Custom outer layer.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750








SERIES	MOUNTING/OPTIONS1	FINISH ³	GLASS OPTIONS	
DP7FGINC	CD_2 HM_2 Hang Straight Pendant Hang Straight All Thread PM_2 PM_2 FS FS Cord and Cable Mount Hang Straight All Thread Pendant/Straight Mount Fuse Holder and Fuse	MW ⁴ Matte White Matte Black PT ⁴ CC Custom Color	FG7WH FG7A0 White/Cased Frosted Glass Amber/Orange Cased Glass FG7SB Sapphire Blue Cased Glass FG7FR Fire Red Cased Glass FG75 Clear Glass Available on Special Request FF Full Frost For Frosted In/Out of Glass	
		See Page 3 for Full Range of Color Options (83-90081)		

EXAMPLE: DP7FGINC/CD36MW/FG7WH

NOTES:

1 See Mounting Pages Options and Details on Components and Finishes 2 Specify Length in Inches: See Mounting Page for Available Lengths
3 See Color Page for More Options/Consult Factory for Special Finishes 4 Standard Finish 5 *7×10 Pendant Reflector




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

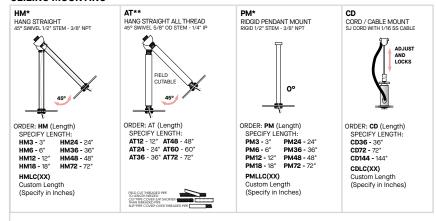

MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

IXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	()
Tier 2 - Typical Finishes	\$\$	00
Custom Color	Contact Factory	Contact Factory

^{*}CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES

Matte White, Gloss Matte Black, Gloss

MW Matte White	GW Gloss White	PT Platinum Silver	MB Matte Black	GB Gloss Black	BZ Bronze

Contact Factory

TIER 2 - TYPICAL FINISHES



Contact Factory

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC Custom Color



^{*}UNAVAILABLE FOR WET LOCATION

