



22" Low/Mid/High Bay 13650 Lm

Quick Ship



PRDDH22LX & ALDDH22LX

APPLICATION

22" Lumen Max LX series performance pendant for low and mid-bay applications. Prismatic refractor provides horizontal and vertical distribution. Aluminum reflector designed for maximum downlight.

FEATURES

Domed Fixture Housing (DDH) features a contemporary design and is easy to maintain. Single-stage optical system for smooth light distribution. LED module and driver designed for ease of maintenance and replacement. Optional safety cable. Variety of optical lenses and mounting methods.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion. Standard Matte White interior finish on reflectors.

ELECTRONICS

LED system features high brightness white Nichia LEDs. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers. LED module is 2 circuit with 2 drivers for multicircuit option as well as safety.

CONSTRUCTION


Housing constructed of extruded and machined aluminum to resist corrosion. Die-cast aluminum heat sink. Refractor made of cast UV stabilized acrylic. Reflector made of spun .060" aluminum.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

QUICK SHIP

Quick Ship Surface highlights products that can ship in 5 - 10 working days.

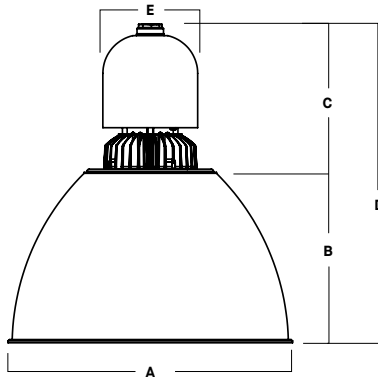

Dimensioned with **PRISMATIC**

SHADES	A	B	C	D	E
PRISMATIC	22.4 569.9 mm	13.6 345.4 mm	11.5 292.1 mm	25.1 637.5 mm	7.5 190.5 mm
ALUMINUM	22.4 569.0 mm	9.0 228.6 mm	11.5 292.1 mm	20.5 520.7 mm	7.5 190.5 mm

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS	LPW
PRDDH22LX65L	7105	52	137
PRDDH22LX100L	10079	80	126
PRDDH22LX130L	12906	98	132
PRDDH22LX140L	13659	107	128

¹ Nominal Delivered Lumens at 35K with DF22, No Lens

DLC LISTINGS	
FIXTURE CATALOG	DLC CLASSIFICATION
ALDDH22LX130L35KDS10X[MOUNTING]/AL22/MWI	PREMIUM
ALDDH22LX130L40KDS10X[MOUNTING]/AL22/MWI	PREMIUM
ALDDH22LX140L35KDS10X[MOUNTING]/AL22/MWI	PREMIUM
ALDDH22LX140L40KDS10X[MOUNTING]/AL22/MWI	PREMIUM
PRDDH22LX130L35KDS10X[MOUNTING]/DF22	PREMIUM
PRDDH22LX130L40KDS10X[MOUNTING]/DF22	PREMIUM
PRDDH22LX140L35KDS10X[MOUNTING]/DF22	PREMIUM
PRDDH22LX140L40KDS10X[MOUNTING]/DF22	PREMIUM

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	SAFETY OPTIONS ³	MOUNTING ⁴	SHADE	ENCLOSURE OPTIONS	OPTIONS	FINISH ¹³	MOUNTING OPTION ¹⁵
PRISMATIC PRDDH22LX	65L 7100 Lm	27K 2700K	EX Electronic Driver, 120V/277V DS10X 10%, 0-10V, 120V/277V DO10X 1%, 0-10V, 120V/277V DO103 1%, 0-10V, 347V	FS Fusing 2CIR 2 Circuit SC1 Safety Cable	HM ⁵ Hang Straight PM ⁵ Rigid Pendant CD ⁵ Cord / Cable Mount CD72 72" Cord / Cable Mount HC ^{5/6/7} Hook & Cord NM2 ^{5/7/8} 1/2" NPT Hub NM3 ^{5/7/8} 3/4" NPT Hub	PRISMATIC PR22 22" Clear DF22 22" Diffuse	TF3 - 6" Frosted Diffuser (CANNOT BE USED WITH DR OPTION) ACCESSORIES DR22A ¹⁰ 22" Spun Door BC22 22" Band Clamp RS22 ¹¹ 22" Refractor Shroud	SC2 Safety Cable Reflector to door	MW ¹⁴ Matte White MB ¹⁴ Matte Black PT ¹⁴ Platinum CC Custom Color	FCHMA Field Mounting Kit for Hang Mount Fixtures
	ALUMINUM ALDDH22LX	100L 10100 Lm 130L 12900 Lm 140L 13650 Lm								

QUICK SHIP

EXAMPLE: PRDDH22LX130L35KEX/HM36/PR22/DR22ACNFR/MW

NOTES:
 1 Nominal Delivered Lumens at 35K with DF22, No Lens 2 Contact Factory for Additional Options 3 See Product Options Page For Details 4 See Mounting Page for Details on Components and Finishes 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 Mounting Supplied by Others 7 Not Available with EMCR 8 12" Leads Unless Specified 9 Reflector Finished Matte White with Finish Color Out 10 Same Finish as Housing 11 Same Finish as Housing / For Use with Prismatic Shades Only 12 No Color 13 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 14 Standard Finishes 15 Field Cuttable Mounting Kit only Available with HM Stem



PROJECT: _____

QUANTITY: _____

TYPE: _____



22" PRISMATIC & ALUMINUM DDH SERIES



SERIES TYPE

ALUMINUM

BOTTOM VIEW



ALDDH22LX MATTE WHITE WITH TF3

PRISMATIC

BOTTOM VIEW



PRDDH22LX MATTE WHITE WITH TF3

STANDARD FINISHES

MW
MATTE WHITE



PRDDH22LX HM MATTE WHITE

MB
MATTE BLACK



PRDDH22LX HM MATTE BLACK

PT
PLATINUM SILVER



PRDDH22LX HM PLATINUM SILVER

MOUNTING TYPES

HM / PM
HANG STRAIGHT / PENDANT



PRDDH22LX SHOWN WITH PM

CD
CORD / CABLE MOUNT



PRDDH22LX SHOWN WITH CD

HC
HOOK CORD



PRDDH22LX SHOWN WITH HC

NM
NO MOUNT



PRDDH22LX SHOWN WITH NM



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



ADDITIONS

FS - Fusing

Slow blow type fuse protects fixture against voltage surges. Factory installed.



SAFETY CABLE OPTIONS


SC1 - Safety Cable

1/16" stainless steel safety cable for added support. Standard kit is 18" and double barrel locks are provided. Approved for California seismic requirements. Rated at 50 lbs.



SC2 - Safety Cable, Refractor to Door

1/16" Stainless steel cable holds door to fixture



OPTIONS

DIFFUSER

TF3-6" Frosted Diffuser



DOOR

DR22A-22" Spun Door
BC22-22" Band Clamp
RS22-22" Refractor Shroud

LENSES

CNFR-Conical Frosted Lens
CN-Conical Lens
DL-Drop Lens
FO-White Optical Acrylic
PP-Prismatic Polycarbonate
PC-Clear Polycarbonate



DR22A SHOWN WITH CN

DOOR & GUARD

DR22AWAG-22" Door with Wire Guard

LENSES

FO-White Optical Acrylic
PP-Prismatic Polycarbonate
PC-Clear Polycarbonate



DR22AWAG SHOWN WITH FO

GUARD OPTION


WAG22-22" Wire Guard



MOUNTING TYPES

HM* - Hang Straight

45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: **HM** (Length)
 SPECIFY LENGTH:
HM3 - 3" **HM24** - 24"
HM6 - 6" **HM36** - 36"
HM12 - 12" **HM48** - 48"
HM18 - 18" **HM72** - 72"
HMLC(XX)
 Custom Length
 (Specify in Inches)

TO TRIM HM STEM IN FIELD ORDER FCHMA KIT.

PM* - Ridgid Pendant Mount


RIGID 5/8" OD STEM - 3/8" IP



ORDER: **PM** (Length)
 SPECIFY LENGTH:
PM3 - 3" **PM24** - 24"
PM6 - 6" **PM36** - 36"
PM12 - 12" **PM48** - 48"
PM18 - 18" **PM72** - 72"
PMLC(XX)
 Custom Length
 (Specify in Inches)

CD - Cord / Cable Mount

SJ CORD WITH 1/16 SS CABLE



ORDER: **CD** (Length)
 SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
 Custom Length
 (Specify in Inches)

HC - Hook & Cord

FOR INDEPENDENT MOUNTING



ORDER: **HC** (Length)
 SPECIFY LENGTH:
HC36 - 36"
HC72 - 72"
HC144 - 144"
HCLC(XX)
 Custom Length
 (Specify in Inches)

NM2 - 1/2" NPT Hub

NM3 - 3/4" NPT Hub
 FOR INDEPENDENT MOUNTING



ORDER: **NMX** (Length)
 SPECIFY LENGTH:
NM2(12) - 12" Leads are Standard
NM3(12) - 12" Leads are Standard
NMXLC(XX)
 Custom Length
 (Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72".
 LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.


MOUNTING OPTION

FCHMA - Field Cuttable Mounting Kit For Hang Mount Fixtures




EMERGENCY BATTERY OPTIONS

EMCR - Large Driver Canopy For 10W Emergency Battery




REMOTE EMERGENCY BATTERY OPTIONS

EMRM* - 7W Remote Emergency Battery (50' Max)



A	B	C
1.3	12.6	13.0

EMEN* - 7W Remote Emergency Battery with Enclosure (50' Max)



A	B	C
2.0	17.0	6.2

*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY



22" PRISMATIC

DDH SERIES / PHOTOMETRIC DATA



PRAF22LEDLX 140L 35K xx DF22 xx

CANDLEPOWER CURVE TEST SP-01544_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																
	0°	0° - 10° 833 6%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter of Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>133 fc</td><td>11.7'</td><td>35 fc</td></tr> <tr><td>10'</td><td>85 fc</td><td>14.6'</td><td>22 fc</td></tr> <tr><td>12'</td><td>59 fc</td><td>17.5'</td><td>15 fc</td></tr> <tr><td>14'</td><td>43 fc</td><td>20.5'</td><td>11 fc</td></tr> <tr><td>16'</td><td>33 fc</td><td>23.4'</td><td>9 fc</td></tr> <tr><td>20'</td><td>21 fc</td><td>29.2'</td><td>6 fc</td></tr> <tr><td>24'</td><td>15 fc</td><td>35.1'</td><td>4 fc</td></tr> <tr><td>28'</td><td>11 fc</td><td>40.9'</td><td>3 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter of Beam Angle	FC at Beam Edge	8'	133 fc	11.7'	35 fc	10'	85 fc	14.6'	22 fc	12'	59 fc	17.5'	15 fc	14'	43 fc	20.5'	11 fc	16'	33 fc	23.4'	9 fc	20'	21 fc	29.2'	6 fc	24'	15 fc	35.1'	4 fc	28'	11 fc	40.9'	3 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>94</td><td>0.81</td><td>50</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>52</td><td>0.45</td><td>62</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>47</td><td>0.41</td><td>39</td><td>0.41</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	94	0.81	50	0.52	22'	14'	52	0.45	62	0.64	26'	16'	47	0.41	39	0.41
	Mounting Distance	FC at Beam Center		Diameter of Beam Angle	FC at Beam Edge																																																															
	8'	133 fc		11.7'	35 fc																																																															
	10'	85 fc		14.6'	22 fc																																																															
	12'	59 fc		17.5'	15 fc																																																															
	14'	43 fc		20.5'	11 fc																																																															
	16'	33 fc		23.4'	9 fc																																																															
	20'	21 fc		29.2'	6 fc																																																															
	24'	15 fc		35.1'	4 fc																																																															
	28'	11 fc		40.9'	3 fc																																																															
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																														
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																																															
18'	12'	94	0.81	50	0.52																																																															
22'	14'	52	0.45	62	0.64																																																															
26'	16'	47	0.41	39	0.41																																																															
0° 8482	0° - 20° 3122 23%	<p>Delivered Lumens: 13592 Luminaire Watts: 107 LER: 127.03</p>	<p>CP at 0° (Nadir): 8482</p>	<p>Beam Angle: 72° Spacing Ratio: 1.09 Melanopic Ratio 0.55</p>	<p>Lumen Multiplier: 130L x .930 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949</p>																																																															
5° 8601	0° - 30° 6248 46%																																																																			
15° 8260	0° - 40° 9096 67%																																																																			
25° 6914	0° - 60° 10983 81%																																																																			
35° 4980	0° - 80° 12221 90%																																																																			
45° 1171	0° - 90° 12628 93%																																																																			
55° 927	Total 13592 100%																																																																			
90° 316																																																																				

PRAF22LEDLX 140L 35K xx DF22 TF3 xx

CANDLEPOWER CURVE TEST SP-01543_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																
	0°	0° - 10° 730 6%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter of Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>117 fc</td><td>11.5'</td><td>31 fc</td></tr> <tr><td>10'</td><td>75 fc</td><td>14.4'</td><td>20 fc</td></tr> <tr><td>12'</td><td>52 fc</td><td>17.3'</td><td>14 fc</td></tr> <tr><td>14'</td><td>38 fc</td><td>20.2'</td><td>10 fc</td></tr> <tr><td>16'</td><td>29 fc</td><td>23.1'</td><td>8 fc</td></tr> <tr><td>20'</td><td>19 fc</td><td>28.9'</td><td>5 fc</td></tr> <tr><td>24'</td><td>13 fc</td><td>34.6'</td><td>3 fc</td></tr> <tr><td>28'</td><td>10 fc</td><td>40.4'</td><td>3 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter of Beam Angle	FC at Beam Edge	8'	117 fc	11.5'	31 fc	10'	75 fc	14.4'	20 fc	12'	52 fc	17.3'	14 fc	14'	38 fc	20.2'	10 fc	16'	29 fc	23.1'	8 fc	20'	19 fc	28.9'	5 fc	24'	13 fc	34.6'	3 fc	28'	10 fc	40.4'	3 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>82</td><td>0.81</td><td>44</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>45</td><td>0.45</td><td>54</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>41</td><td>0.41</td><td>34</td><td>0.41</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	82	0.81	44	0.52	22'	14'	45	0.45	54	0.64	26'	16'	41	0.41	34	0.41
	Mounting Distance	FC at Beam Center		Diameter of Beam Angle	FC at Beam Edge																																																															
	8'	117 fc		11.5'	31 fc																																																															
	10'	75 fc		14.4'	20 fc																																																															
	12'	52 fc		17.3'	14 fc																																																															
	14'	38 fc		20.2'	10 fc																																																															
	16'	29 fc		23.1'	8 fc																																																															
	20'	19 fc		28.9'	5 fc																																																															
	24'	13 fc		34.6'	3 fc																																																															
	28'	10 fc		40.4'	3 fc																																																															
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																														
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																																															
18'	12'	82	0.81	44	0.52																																																															
22'	14'	45	0.45	54	0.64																																																															
26'	16'	41	0.41	34	0.41																																																															
0° 7516	0° - 20° 2715 23%	<p>Delivered Lumens: 11997 Luminaire Watts: 107 LER: 112.12</p>	<p>CP at 0° (Nadir): 7516</p>	<p>Beam Angle: 72° Spacing Ratio: 1.05 Melanopic Ratio 0.52</p>	<p>Lumen Multiplier: 130L x .939 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949</p>																																																															
5° 7591	0° - 30° 5384 45%																																																																			
15° 7130	0° - 40° 7792 65%																																																																			
25° 5839	0° - 60° 9488 79%																																																																			
35° 4110	0° - 80° 10643 89%																																																																			
45° 1061	0° - 90° 11052 92%																																																																			
55° 814	Total 11997 100%																																																																			
90° 321																																																																				

PRAF22LEDLX 140L 35K xx PR22 xx

CANDLEPOWER CURVE TEST SP-01499_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																
	0°	0° - 10° 1134 8%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter of Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>169 fc</td><td>9.5'</td><td>54 fc</td></tr> <tr><td>10'</td><td>108 fc</td><td>11.9'</td><td>34 fc</td></tr> <tr><td>12'</td><td>75 fc</td><td>14.3'</td><td>24 fc</td></tr> <tr><td>14'</td><td>55 fc</td><td>16.7'</td><td>17 fc</td></tr> <tr><td>16'</td><td>42 fc</td><td>19.1'</td><td>13 fc</td></tr> <tr><td>20'</td><td>27 fc</td><td>23.9'</td><td>9 fc</td></tr> <tr><td>24'</td><td>19 fc</td><td>28.6'</td><td>6 fc</td></tr> <tr><td>28'</td><td>14 fc</td><td>33.4'</td><td>4 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter of Beam Angle	FC at Beam Edge	8'	169 fc	9.5'	54 fc	10'	108 fc	11.9'	34 fc	12'	75 fc	14.3'	24 fc	14'	55 fc	16.7'	17 fc	16'	42 fc	19.1'	13 fc	20'	27 fc	23.9'	9 fc	24'	19 fc	28.6'	6 fc	28'	14 fc	33.4'	4 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>101</td><td>0.81</td><td>56</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>56</td><td>0.45</td><td>69</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>51</td><td>0.41</td><td>44</td><td>0.41</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	101	0.81	56	0.52	22'	14'	56	0.45	69	0.64	26'	16'	51	0.41	44	0.41
	Mounting Distance	FC at Beam Center		Diameter of Beam Angle	FC at Beam Edge																																																															
	8'	169 fc		9.5'	54 fc																																																															
	10'	108 fc		11.9'	34 fc																																																															
	12'	75 fc		14.3'	24 fc																																																															
	14'	55 fc		16.7'	17 fc																																																															
	16'	42 fc		19.1'	13 fc																																																															
	20'	27 fc		23.9'	9 fc																																																															
	24'	19 fc		28.6'	6 fc																																																															
	28'	14 fc		33.4'	4 fc																																																															
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																														
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																																															
18'	12'	101	0.81	56	0.52																																																															
22'	14'	56	0.45	69	0.64																																																															
26'	16'	51	0.41	44	0.41																																																															
0° 10812	0° - 20° 4616 34%	<p>Delivered Lumens: 13659 Luminaire Watts: 107 LER: 127.65</p>	<p>CP at 0° (Nadir): 10812</p>	<p>Beam Angle: 62° Spacing Ratio: 1.06 Melanopic Ratio 0.55</p>	<p>Lumen Multiplier: 130L x .945 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949</p>																																																															
5° 11386	0° - 30° 8927 65%																																																																			
15° 12769	0° - 40° 11598 85%																																																																			
25° 9738	0° - 60° 12794 94%																																																																			
35° 4295	0° - 80° 13140 96%																																																																			
45° 824	0° - 90° 13229 97%																																																																			
55° 463	Total 13659 100%																																																																			
90° 78																																																																				



22" PRISMATIC

DDH SERIES / PHOTOMETRIC DATA



PRAF22LEDLX 140L 35K xx PR22 TF3 xx

CANDLEPOWER CURVE TEST SP-01520_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																			
	0°	0° - 10° 1047 9%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter at Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>164 fc</td><td>9.5'</td><td>52 fc</td></tr> <tr><td>10'</td><td>105 fc</td><td>11.9'</td><td>33 fc</td></tr> <tr><td>12'</td><td>73 fc</td><td>14.2'</td><td>23 fc</td></tr> <tr><td>14'</td><td>54 fc</td><td>16.6'</td><td>17 fc</td></tr> <tr><td>16'</td><td>41 fc</td><td>19.0'</td><td>13 fc</td></tr> <tr><td>20'</td><td>26 fc</td><td>23.7'</td><td>8 fc</td></tr> <tr><td>24'</td><td>18 fc</td><td>28.5'</td><td>6 fc</td></tr> <tr><td>28'</td><td>13 fc</td><td>33.2'</td><td>4 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter at Beam Angle	FC at Beam Edge	8'	164 fc	9.5'	52 fc	10'	105 fc	11.9'	33 fc	12'	73 fc	14.2'	23 fc	14'	54 fc	16.6'	17 fc	16'	41 fc	19.0'	13 fc	20'	26 fc	23.7'	8 fc	24'	18 fc	28.5'	6 fc	28'	13 fc	33.2'	4 fc	<table border="1"> <thead> <tr> <th>Ceiling Height</th> <th>Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <td></td> <td></td> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>89</td><td>0.81</td><td>49</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>49</td><td>0.45</td><td>61</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>45</td><td>0.41</td><td>39</td><td>0.41</td></tr> </tbody> </table>		Ceiling Height	Fixture Spacing	RCR 2		RCR 4				FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	89	0.81	49	0.52	22'	14'	49	0.45	61	0.64	26'	16'	45	0.41	39	0.41
	Mounting Distance	FC at Beam Center		Diameter at Beam Angle	FC at Beam Edge																																																																		
	8'	164 fc		9.5'	52 fc																																																																		
	10'	105 fc		11.9'	33 fc																																																																		
	12'	73 fc		14.2'	23 fc																																																																		
	14'	54 fc		16.6'	17 fc																																																																		
	16'	41 fc		19.0'	13 fc																																																																		
	20'	26 fc		23.7'	8 fc																																																																		
	24'	18 fc		28.5'	6 fc																																																																		
	28'	13 fc		33.2'	4 fc																																																																		
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																																	
		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.																																																																		
18'	12'	89	0.81	49	0.52																																																																		
22'	14'	49	0.45	61	0.64																																																																		
26'	16'	45	0.41	39	0.41																																																																		
0° 10513	0° - 20° 4069 33%	Delivered Illuminance Rating: (DIR) 110 FC per W/Sq. Ft. 95 FC per W/Sq. Ft.																																																																					
5° 10628	0° - 30° 7772 64%	4' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 6.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 6.5' x 2.50 * Average Initial Footcandles at 2.5' Above Floor * Exceeds Spacing Ratio by 3%																																																																					
15° 11007	0° - 40° 10079 83%																																																																						
25° 8473	0° - 60° 11182 92%																																																																						
35° 3788	0° - 80° 11587 95%																																																																						
45° 753	0° - 90° 11724 96%																																																																						
55° 439	Total 12162 100%																																																																						
90° 106																																																																							
Delivered Lumens: 12162 Luminaire Watts: 107 LER: 113.66	CP at 0° (Nadir): 10513	Beam Angle: 61° Spacing Ratio: 1.01 Melanopic Ratio 0.52	Lumen Multiplier: 130L x .945 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949																																																																				

PRxxx22LX-140L-35K-EX-DF22

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																																	
	0.00°	0° - 10° 776 5%	<table border="1"> <thead> <tr> <th>Mounting Height AFF</th> <th>FC at Center on Floor</th> </tr> </thead> <tbody> <tr><td>10.0'</td><td>79 fc</td></tr> <tr><td>12.0'</td><td>55 fc</td></tr> <tr><td>14.0'</td><td>40 fc</td></tr> <tr><td>16.0'</td><td>31 fc</td></tr> <tr><td>20.0'</td><td>20 fc</td></tr> <tr><td>24.0'</td><td>14 fc</td></tr> <tr><td>28.0'</td><td>10 fc</td></tr> <tr><td>32.0'</td><td>8 fc</td></tr> </tbody> </table>	Mounting Height AFF	FC at Center on Floor	10.0'	79 fc	12.0'	55 fc	14.0'	40 fc	16.0'	31 fc	20.0'	20 fc	24.0'	14 fc	28.0'	10 fc	32.0'	8 fc	<table border="1"> <thead> <tr> <th>Ceiling Height</th> <th>Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <td></td> <td></td> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>22'</td><td>20'</td><td>33</td><td>0.34</td><td>28</td><td>0.34</td></tr> <tr><td>26'</td><td>22''</td><td>21</td><td>0.21</td><td>18</td><td>0.21</td></tr> <tr><td>32'</td><td>24''''</td><td>19</td><td>0.19</td><td>23</td><td>0.28</td></tr> </tbody> </table>		Ceiling Height	Fixture Spacing	RCR 2		RCR 4				FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	22'	20'	33	0.34	28	0.34	26'	22''	21	0.21	18	0.21	32'	24''''	19	0.19	23	0.28
	Mounting Height AFF	FC at Center on Floor																																																			
	10.0'	79 fc																																																			
	12.0'	55 fc																																																			
	14.0'	40 fc																																																			
	16.0'	31 fc																																																			
	20.0'	20 fc																																																			
	24.0'	14 fc																																																			
	28.0'	10 fc																																																			
	32.0'	8 fc																																																			
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																															
		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.																																																
22'	20'	33	0.34	28	0.34																																																
26'	22''	21	0.21	18	0.21																																																
32'	24''''	19	0.19	23	0.28																																																
0.00° 7,914	0° - 20° 2,974 21%	Delivered Illuminance Rating: (DIR) 100 FC per W/Sq. Ft. 83 FC per W/Sq. Ft.																																																			
20.00° 7,314	0° - 30° 6,050 43%	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 6.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 6.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 14% ** Exceeds spacing criteria by -0% *** Exceeds spacing criteria by -17%																																																			
40.00° 2,734	0° - 40° 9,018 63%																																																				
60.00° 856	0° - 60° 10,965 77%																																																				
80.00° 486	0° - 80° 12,315 87%																																																				
90.00° 352	0° - 90° 12,767 90%																																																				
100.00° 278	Total 14,229 100%																																																				
110.00° 229																																																					
120.00° 201																																																					
140.00° 200																																																					
160.00° 225																																																					
180.00° 216																																																					
Delivered Lumens: 14,229 Luminaire Watts: 126 LER: 112.93	CP at 0deg (Nadir): 7,914 CRI: 85+	Lamp Multiplier: 65L x 0.47, 100L x 0.71, 130L x 0.93 CCT Multiplier: 40K x 1.03, 30K x 0.979, 27K x 0.959																																																			

PRxxx22LEDLX-140L-35K-E1-XXXX-PR22

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																																	
	0.00°	0° - 10° 1,033 8%	<table border="1"> <thead> <tr> <th>Mounting Height AFF</th> <th>FC at Center on Floor</th> </tr> </thead> <tbody> <tr><td>10.0'</td><td>93 fc</td></tr> <tr><td>12.0'</td><td>65 fc</td></tr> <tr><td>14.0'</td><td>48 fc</td></tr> <tr><td>16.0'</td><td>36 fc</td></tr> <tr><td>20.0'</td><td>23 fc</td></tr> <tr><td>24.0'</td><td>16 fc</td></tr> <tr><td>28.0'</td><td>12 fc</td></tr> <tr><td>32.0'</td><td>9 fc</td></tr> </tbody> </table>	Mounting Height AFF	FC at Center on Floor	10.0'	93 fc	12.0'	65 fc	14.0'	48 fc	16.0'	36 fc	20.0'	23 fc	24.0'	16 fc	28.0'	12 fc	32.0'	9 fc	<table border="1"> <thead> <tr> <th>Ceiling Height</th> <th>Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <td></td> <td></td> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>22'</td><td>16'</td><td>49</td><td>0.52</td><td>27</td><td>0.34</td></tr> <tr><td>26'</td><td>18''</td><td>31</td><td>0.33</td><td>39</td><td>0.48</td></tr> <tr><td>32'</td><td>20''''</td><td>26</td><td>0.28</td><td>23</td><td>0.28</td></tr> </tbody> </table>		Ceiling Height	Fixture Spacing	RCR 2		RCR 4				FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	22'	16'	49	0.52	27	0.34	26'	18''	31	0.33	39	0.48	32'	20''''	26	0.28	23	0.28
	Mounting Height AFF	FC at Center on Floor																																																			
	10.0'	93 fc																																																			
	12.0'	65 fc																																																			
	14.0'	48 fc																																																			
	16.0'	36 fc																																																			
	20.0'	23 fc																																																			
	24.0'	16 fc																																																			
	28.0'	12 fc																																																			
	32.0'	9 fc																																																			
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																															
		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.																																																
22'	16'	49	0.52	27	0.34																																																
26'	18''	31	0.33	39	0.48																																																
32'	20''''	26	0.28	23	0.28																																																
0.00° 9,341	0° - 20° 4,060 33%	Delivered Illuminance Rating: (DIR) 93 FC per W/Sq. Ft. 81 FC per W/Sq. Ft.																																																			
20.00° 10,049	0° - 30° 7,872 65%	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 6.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 6.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by -4% ** Exceeds spacing criteria by -14% *** Exceeds spacing criteria by -27%																																																			
40.00° 1,737	0° - 40° 10,281 84%																																																				
60.00° 221	0° - 60° 11,264 92%																																																				
80.00° 107	0° - 80° 11,542 95%																																																				
90.00° 55	0° - 90° 11,621 95%																																																				
100.00° 55	Total 12,193 100%																																																				
110.00° 73																																																					
120.00° 71																																																					
140.00° 121																																																					
160.00° 172																																																					
180.00° 206																																																					
Delivered Lumens: 12,193 Luminaire Watts: 126 LER: 96.77	CP at 0deg (Nadir): 9,341 CRI: 85	Lamp Multiplier: 65L x 0.67, 100L x 1.1, 130L x 1.32, 140L x 1.42 CCT Multiplier: 40K x 1.03, 30K x 0.98, 27K x 0.96																																																			



22" PRISMATIC

DDH SERIES / PHOTOMETRIC DATA



PRxxx22LEDLX-140L-35K-EX-xxxx-DF22-DR22-FO

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS		SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT							
				Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 2		RCR 4			
	0.00°	0° - 10°	355	4%											
	0.00°	0° - 20°	1,286	13%	10.0'	36 fc	23.4'	14 fc	22'	20'*	22	0.30	18	0.30	
	5.00°	0° - 30°	2,646	27%	12.0'	25 fc	28.1'	10 fc	26'	22**	14	0.19	11	0.19	
	10.00°	0° - 40°	4,234	43%	14.0'	18 fc	32.8'	7 fc	32'	24***	13	0.17	15	0.25	
	15.00°	0° - 60°	7,149	72%	16.0'	14 fc	37.5'	6 fc	Delivered Illuminance Rating: (DIR)		75 FC per W/Sq. Ft.		59 FC per W/Sq. Ft.		
	20.00°	0° - 80°	8,543	86%	20.0'	9 fc	46.9'	4 fc	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 6.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 6.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 12% ** Exceeds spacing criteria by -2% *** Exceeds spacing criteria by -18%						
	30.00°	0° - 90°	8,636	87%	24.0'	6 fc	56.3'	3 fc	Lamp Multiplier: 65L x 0.67, 100L x 1, 130L x 1.2 CCT Multiplier: 40K x 1.03, 30K x 0.979, 27K x 0.959						
	40.00°	Total	9,926	100%	28.0'	5 fc	65.7'	2 fc							
	50.00°				32.0'	4 fc	75.0'	1 fc							
	60.00°														
	70.00°														
	80.00°														
	90.00°														

Delivered Lumens: **9,926**
 Luminaire Watts: **111.89**
 LER: **88.71**

CP at 0deg (Nadir): **3,601**
 CRI:

Beam Angle: **98.96**
 Spacing Ratio: **1.15**

Lamp Multiplier: **65L x 0.67, 100L x 1, 130L x 1.2**
 CCT Multiplier: **40K x 1.03, 30K x 0.979, 27K x 0.959**



22" ALUMINUM

DDH SERIES / PHOTOMETRIC DATA



ALDDH22LEDLX 140L 35K xx AL22 MWI xx

CANDLEPOWER CURVE TEST SP-01485_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																
	0°	0° - 10° 629 4%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter at Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>102 fc</td><td>18.2'</td><td>15 fc</td></tr> <tr><td>10'</td><td>66 fc</td><td>22.7'</td><td>9 fc</td></tr> <tr><td>12'</td><td>46 fc</td><td>27.2'</td><td>7 fc</td></tr> <tr><td>14'</td><td>33 fc</td><td>31.8'</td><td>5 fc</td></tr> <tr><td>16'</td><td>26 fc</td><td>36.3'</td><td>4 fc</td></tr> <tr><td>20'</td><td>16 fc</td><td>45.4'</td><td>2 fc</td></tr> <tr><td>24'</td><td>11 fc</td><td>54.5'</td><td>2 fc</td></tr> <tr><td>28'</td><td>8 fc</td><td>63.6'</td><td>1 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter at Beam Angle	FC at Beam Edge	8'	102 fc	18.2'	15 fc	10'	66 fc	22.7'	9 fc	12'	46 fc	27.2'	7 fc	14'	33 fc	31.8'	5 fc	16'	26 fc	36.3'	4 fc	20'	16 fc	45.4'	2 fc	24'	11 fc	54.5'	2 fc	28'	8 fc	63.6'	1 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>99</td><td>0.81</td><td>52</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>54</td><td>0.45</td><td>64</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>50</td><td>0.41</td><td>40</td><td>0.41</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	99	0.81	52	0.52	22'	14'	54	0.45	64	0.64	26'	16'	50	0.41	40	0.41
	Mounting Distance	FC at Beam Center		Diameter at Beam Angle	FC at Beam Edge																																																															
	8'	102 fc		18.2'	15 fc																																																															
	10'	66 fc		22.7'	9 fc																																																															
	12'	46 fc		27.2'	7 fc																																																															
	14'	33 fc		31.8'	5 fc																																																															
	16'	26 fc		36.3'	4 fc																																																															
	20'	16 fc		45.4'	2 fc																																																															
	24'	11 fc		54.5'	2 fc																																																															
	28'	8 fc		63.6'	1 fc																																																															
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																														
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																																															
18'	12'	99	0.81	52	0.52																																																															
22'	14'	54	0.45	64	0.64																																																															
26'	16'	50	0.41	40	0.41																																																															
0° 6552	0° - 20° 2397 17%	<p>Beam Angle: 97° Spacing Ratio: 1.25 Melanopic Ratio: 0.55</p>	<p>Lumen Multiplier: 130L x .935 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949</p>																																																																	
5° 6512	0° - 30° 5078 36%																																																																			
15° 6249	0° - 40° 8364 60%																																																																			
25° 5789	0° - 60° 12725 91%																																																																			
35° 5208	0° - 80° 13863 99%																																																																			
45° 4445	0° - 90° 13970 100%																																																																			
55° 1218	Total 13991 100%																																																																			
90° 11																																																																				
Delivered Lumens: 13991 Luminaire Watts: 107 LER: 130.76	CP at 0° (Nadir): 6552 CRI: 80+																																																																			

ALDDH22LEDLX 140L 35K xx AL22 MWI TF3 xx

CANDLEPOWER CURVE TEST SP-01488_3	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE HORIZONTAL FOOTCANDLES INITIAL DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES HORIZONTAL FOOTCANDLES AND WATTS/SQ FT																																																																
	0°	0° - 10° 541 4%	<table border="1"> <thead> <tr> <th>Mounting Distance</th> <th>FC at Beam Center</th> <th>Diameter at Beam Angle</th> <th>FC at Beam Edge</th> </tr> </thead> <tbody> <tr><td>8'</td><td>88 fc</td><td>18.1'</td><td>13 fc</td></tr> <tr><td>10'</td><td>57 fc</td><td>22.7'</td><td>8 fc</td></tr> <tr><td>12'</td><td>39 fc</td><td>27.2'</td><td>6 fc</td></tr> <tr><td>14'</td><td>29 fc</td><td>31.7'</td><td>4 fc</td></tr> <tr><td>16'</td><td>22 fc</td><td>36.3'</td><td>3 fc</td></tr> <tr><td>20'</td><td>14 fc</td><td>45.3'</td><td>2 fc</td></tr> <tr><td>24'</td><td>10 fc</td><td>54.4'</td><td>1 fc</td></tr> <tr><td>28'</td><td>7 fc</td><td>63.4'</td><td>1 fc</td></tr> </tbody> </table>	Mounting Distance	FC at Beam Center	Diameter at Beam Angle	FC at Beam Edge	8'	88 fc	18.1'	13 fc	10'	57 fc	22.7'	8 fc	12'	39 fc	27.2'	6 fc	14'	29 fc	31.7'	4 fc	16'	22 fc	36.3'	3 fc	20'	14 fc	45.3'	2 fc	24'	10 fc	54.4'	1 fc	28'	7 fc	63.4'	1 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>18'</td><td>12'</td><td>85</td><td>0.81</td><td>44</td><td>0.52</td></tr> <tr><td>22'</td><td>14'</td><td>47</td><td>0.45</td><td>55</td><td>0.64</td></tr> <tr><td>26'</td><td>16'</td><td>43</td><td>0.41</td><td>35</td><td>0.41</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	18'	12'	85	0.81	44	0.52	22'	14'	47	0.45	55	0.64	26'	16'	43	0.41	35	0.41
	Mounting Distance	FC at Beam Center		Diameter at Beam Angle	FC at Beam Edge																																																															
	8'	88 fc		18.1'	13 fc																																																															
	10'	57 fc		22.7'	8 fc																																																															
	12'	39 fc		27.2'	6 fc																																																															
	14'	29 fc		31.7'	4 fc																																																															
	16'	22 fc		36.3'	3 fc																																																															
	20'	14 fc		45.3'	2 fc																																																															
	24'	10 fc		54.4'	1 fc																																																															
	28'	7 fc		63.4'	1 fc																																																															
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																																														
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																																															
18'	12'	85	0.81	44	0.52																																																															
22'	14'	47	0.45	55	0.64																																																															
26'	16'	43	0.41	35	0.41																																																															
0° 5659	0° - 20° 2054 17%	<p>Beam Angle: 97° Spacing Ratio: 1.21 Melanopic Ratio: 0.53</p>	<p>Lumen Multiplier: 130L x .950 CCT Multiplier: 40K x 1.00, 30K x 0.978, 27K x 0.949</p>																																																																	
5° 5605	0° - 30° 4327 36%																																																																			
15° 5341	0° - 40° 7084 59%																																																																			
25° 4891	0° - 60° 10890 90%																																																																			
35° 4354	0° - 80° 11923 99%																																																																			
45° 3665	0° - 90° 12018 100%																																																																			
55° 1192	Total 12052 100%																																																																			
90° 5																																																																				
Delivered Lumens: 12052 Luminaire Watts: 107 LER: 112.64	CP at 0° (Nadir): 5659 CRI: 80+																																																																			

ALxxx22LEDLX

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																														
	0.00°	0° - 10° 717 6%	<table border="1"> <thead> <tr> <th>Mounting Height AFF</th> <th>FC at Center on Floor</th> </tr> </thead> <tbody> <tr><td>10.0'</td><td>69 fc</td></tr> <tr><td>12.0'</td><td>48 fc</td></tr> <tr><td>14.0'</td><td>35 fc</td></tr> <tr><td>16.0'</td><td>27 fc</td></tr> <tr><td>20.0'</td><td>17 fc</td></tr> <tr><td>24.0'</td><td>12 fc</td></tr> <tr><td>28.0'</td><td>9 fc</td></tr> <tr><td>32.0'</td><td>7 fc</td></tr> </tbody> </table>	Mounting Height AFF	FC at Center on Floor	10.0'	69 fc	12.0'	48 fc	14.0'	35 fc	16.0'	27 fc	20.0'	17 fc	24.0'	12 fc	28.0'	9 fc	32.0'	7 fc	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr><td>22'</td><td>16'</td><td>50</td><td>0.52</td><td>26</td><td>0.34</td></tr> <tr><td>26'</td><td>18'</td><td>32</td><td>0.33</td><td>37</td><td>0.48</td></tr> <tr><td>32'</td><td>20'</td><td>27</td><td>0.28</td><td>22</td><td>0.28</td></tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	22'	16'	50	0.52	26	0.34	26'	18'	32	0.33	37	0.48	32'	20'	27	0.28	22	0.28
	Mounting Height AFF	FC at Center on Floor																																																
	10.0'	69 fc																																																
	12.0'	48 fc																																																
	14.0'	35 fc																																																
	16.0'	27 fc																																																
	20.0'	17 fc																																																
	24.0'	12 fc																																																
	28.0'	9 fc																																																
	32.0'	7 fc																																																
	Ceiling Height	Fixture Spacing		RCR 2		RCR 4																																												
FC *			W/Sq. Ft.	FC *	W/Sq. Ft.																																													
22'	16'	50	0.52	26	0.34																																													
26'	18'	32	0.33	37	0.48																																													
32'	20'	27	0.28	22	0.28																																													
0.00° 6,928	0° - 20° 2,341 18%	<p>Lamp Multiplier: 65L x 0.47, 100L x 0.71, 130L x 0.93 CCT Multiplier: 40K x 1.03, 30K x 0.979, 27K x 0.959</p>	<p>2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 6.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 6.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by -2% ** Exceeds spacing criteria by -12% *** Exceeds spacing criteria by -25%</p>																																															
20.00° 5,503	0° - 30° 4,726 36%																																																	
40.00° 4,344	0° - 40° 7,613 59%																																																	
60.00° 542	0° - 60° 12,120 93%																																																	
80.00° 185	0° - 80° 12,902 99%																																																	
90.00° 4	0° - 90° 12,995 100%																																																	
Delivered Lumens: 12,995 Luminaire Watts: 126 LER: 103.13	CP at 0deg (Nadir): 6,928 CRI: 85																																																	




22" ALUMINUM

DDH SERIES / PHOTOMETRIC DATA

HOW TO USE PERFORMANCE DATA

SINGLE UNIT

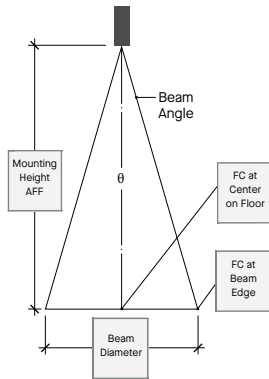

Cone of Light of a single, symmetrical beam luminaire. Direct initial illumination (FC) and Beam Angle diameter directly beneath fixture; shown at different distances from aperture to horizontal plane. Calculated using Inverse Square Law.

$$FC_{H_1} = CP \times (\cos \theta) \div D^2$$

$$\text{Beam Diam.} = \frac{1}{2} \text{ Beam Angle (Tan)} \times 2D$$

- CP Candela at 0° (Nadir)
- Cos θ Cosine of θ Angle
- D Distance (Mounting Height AFF)
- FC_{H_1} Footcandles, Horizontal
- Beam Angle Cone of light to 50% max. CP
- Beam Diam. Pattern of light at Beam Angle


MULTIPLE UNITS

Square grid layout of multiple luminaires in unfurnished, square rooms of different proportions (Room Cavity Ratios) with 80/50/20% room surface reflectances. 4' Suspension Length to aperture. Initial average illumination (FC) calculated at 2.5' above floor, using Zonal Cavity Method. W/Sq. Ft. of layout shown for each ceiling height and RCR.

Delivered Illuminance Rating (DIR®):
System performance indicator expressed as ratio of approximate initial FC per W/Sq. Ft. delivered to horizontal plane below, for the range of ceiling heights indicated.

- To estimate FC for Fixture Spacing that is different than shown (do not exceed Spacing Ratio):
 $FC = \text{Chart Spacing}^2 \div \text{Different Spacing}^2 \times \text{Chart FC}$

- To estimate Sq. Ft. per fixture for a specific target FC:
 $\text{Sq. Ft. / Fixture} = \text{Chart FC} \times \text{Chart Spacing}^2 \div \text{Target FC}$



- To estimate Fixture Quantity in a room:
 $\text{Fixture Qty.} = \text{Sq. Ft. of Rm.} \div \text{Sq. Ft. per fixture}$

- To estimate Watts/Sq. Ft.:
 $W/ \text{Sq. Ft.} = \text{Luminaire Watts} \times \text{Qty.} \div \text{Sq. Ft. of Rm.}$