

PROJECT:	
QUANTITY:	TYPE:





SER	RIES	LUMENS ¹		сст		DRIVER / VOLTAGE		OPTIONS		MOUNTING ²		FINISH⁴	
GD26	519LX	65L	6500Lm	30K 35K	2700K 3000K 3500K 4000K	DS10X	Electronic Driver 10% 0-10V 1% 0-10V	FS	Fusing	HM_3 PM_3 CD_3	Large Driver Canopy Hang Straight Pendant Pendant/Straight Mount Cord and Cable Mount	MB ⁵ PT ⁵	Matte White Matte Black Platinum Silver Custom Color
										CM_3	Cord Mount	Reference Color Sheet Located on Product Webpage for Full List of Available Colors (83-10172)	


EXAMPLE: GD2619LX60L35KEXCP113HM36MW

NOTES:
1 Nominal Source Lumens at 35K 2 See Mounting Page for Details on Components and Finishes 3 Specify Length in Inches: See Mounting Page for Available Lengths 4 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 5 Standard Finishes





HOUSING DIMENSIONS



APPLICATION

Giant Dome fixture offers wide distribution for general illumination.

FFATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior finish standard. Custom Color interior finish available.

ELECTRONICS

LED system features high brightness white Nichia LEDs. 3-step MacAdam Ellipses binning. Standard CRI: 80+. Higher CRI, R6 and custom LED configurations are available; consult factory. Variety of electronic 120v/277v and dimming drivers. LED module is 2 circuit with 2 drivers for multicircuit option.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum.

CODE COMPLIANCE

BAA Compliant. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598/8750.

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)



GD2619LX SHOWN WITH CP113HM





GD2619LX SHOWN WITH CP113HM

CM CORD MOUNT




GD2619LX SHOWN WITH CP113HM

MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

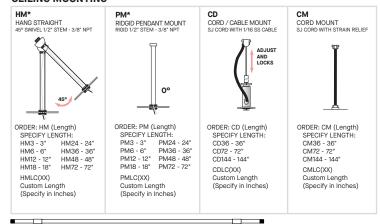

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

**ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT

