


# C0206

## Surface Mount Cylinder

DRY/DAMP LOCATION


### FIXTURE DIMENSIONS

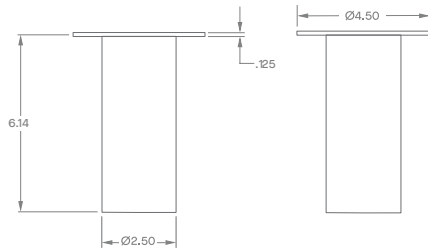

PROJECT: \_\_\_\_\_  
QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



BOTTOM VIEW



SHOWN WITH HEX CELL

SIDE VIEW



### PRODUCT SELECTOR GUIDE

SERIES	LUMENS	CCT	OPTICS	VOLTAGE	DIMMING	LENS	MOUNTING	FINISH
<b>C0206</b>	7L	30HK	FL	X	D5		SM	

#### EXAMPLE

<b>C0206</b>	7L	30HK	FL	X	D5	LL	SM	TB
--------------	----	------	----	---	----	----	----	----

SERIES	LUMENS	CCT	OPTICS	VOLTAGE / DIMMING			LENS¹	MOUNTING	BODY FINISH	
C0206	7L 750 Lm	90 CRI	FL Flood (33°)	X	Universal (120V/277V)	D5	1%, 0-10V, ELV & TRIAC	LS Diffusing Lens LL Linear Spread Lens LC Clear Lens HL Hex Cell  ¹ Max 2	SM Surface Mount	TW Textured White TB Textured Black MT Textured Silver CC Custom Color
		30HK 3000K								

EXAMPLE: C02067L30HKFLXD5LSSMTB