




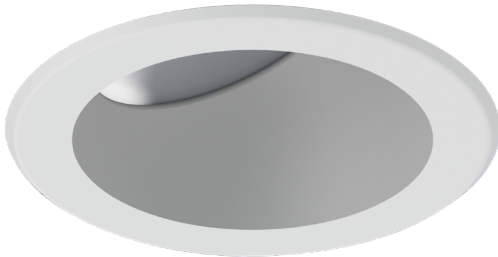

# 8" ROUND ACCENT REMODEL XT SERIES / 5000 LUMENS MAX

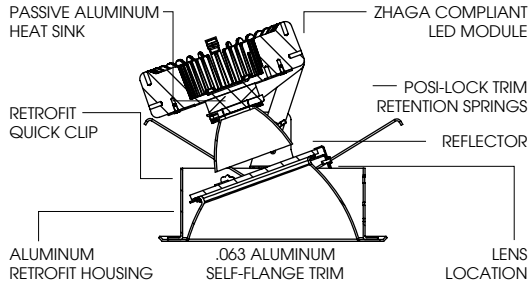

A	B	C
7.0	9.0	7.0
177.8 mm	228.6 mm	177.8 mm

Ceiling Cutout: Ø 8.3"

## SGRTA8XT - TRIM FLANGE / NON-IC RATED

### APPLICATION

8" Round adjustable LED remodelight platform for focused downlighting.

### FEATURES

Remodel adjustable accent housing designed for install in finished "hard" ceiling or into existing precut hole. Yoke adjusts, tilts and locks from 0° - 45°. Fixture can be rotated and aimed 360°. Quick mount remodel spring clips with mechanical lock down. Return edge to seat fixture in ceiling. Fixture will work in up to 1" thick ceiling<sup>1</sup>. Quick change LED module with interchangeable optics for job site flexibility and fixture maintenance. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

### TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Housing/frame constructed of .060" aluminum to resist corrosion. Self-flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

### CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBER	SOURCE LUMENS <sup>2</sup>	SYSTEM WATTS
SGRTA8XT10L	1000	11.1
SGRTA8XT13L	1300	15.0
SGRTA8XT20L	2000	23.7
SGRTA8XT30L	3000	34.6
SGRTA8XT40L	4000	39.9
SGRTA8XT50L	5000	54.0

SERIES	LUMENS <sup>2</sup>	CCT	BEAM	DRIVER / VOLTAGE <sup>4</sup>	OPTIONS <sup>7</sup>	TRIM	FINISH	TRIM OPTIONS				
SGRTA8XT	83 CRI		ND	20°	E Electronic Driver	1 120V	FS Fusing	AR8755XT	SG <sup>3</sup> Semi-Diffuse	SO <sup>10</sup> Micro Prism		
	10L	1000 Lm	27K	2700K	MD	30°	DS10	10% 0-10V	2 277V	EM Emergency Battery	HZ Haze Full Diffuse	SO <sup>10</sup> Solite™ Lens
	13L	1300 Lm	30K	3000K	WD	40°	DO10	1% 0-10V		CR Corrosion Resistant	MW Matte White	GL Clear Glass Lens
	20L	2000 Lm	35K	3500K	XW	50°	DS2W1	1%, ELV/MLV, 120V		GR Goof Ring	MB Matte Black	FG Frosted Glass Lens
	30L	3000 Lm	40K	4000K			DLTE1 <sup>5</sup>	1% Lutron® 2-Wire Forward Phase, 120V			PT Platinum Silver	PF <sup>11</sup> Polished Flange
	40L	4000 Lm					DL3E <sup>5</sup>	1% Lutron® EcoSystem®, Fade			OB Oil Rubbed Bronze	WL Wet Location
	50L	5000 Lm					EL10 <sup>5</sup>	1%, eldoLED			CH Charcoal	
	98 CRI <sup>3</sup>						ED01 <sup>5</sup>	0.1%, eldoLED			AC Anodic Champagne	
	10L	1000 Lm	27HK	2700K			DALI <sup>5</sup>	DALI Control			AS Anodic Sapphire	
	13L	1300 Lm	30HK	3000K			DMXS <sup>6</sup>	DMX Standard Configuration			AM Anodic Malachite	
	20L	2000 Lm	35HK	3500K			DMXC <sup>6</sup>	DMX Non-Standard Custom			SN Sun Gold	
	30L	3000 Lm	40HK	4000K							CO Copper Metallic	
										GH Graphite		
										AMB Anti Microbial Finish		
										CC <sup>2</sup> Custom Color		

EXAMPLE: SGRTA8XT13L27KMDE1/AR8755SGSO

NOTES:  
 1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 98CRI Operates at Higher Watts than 83CRI 4 Contact Factory for Additional Options 5 50L Not Available with Lutron Drivers 6 Contact Factory  
 7 See Product Options Page For Details 8 Standard Finish 9 Contact Factory for Special Finishes 10 Standard Lens 11 Flange and Reflector Same Finish



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.