




TECH TIER SERIES
DAMP / WET LOCATION
TIERS

PROJECT: _____
 QUANTITY: _____ TYPE: _____

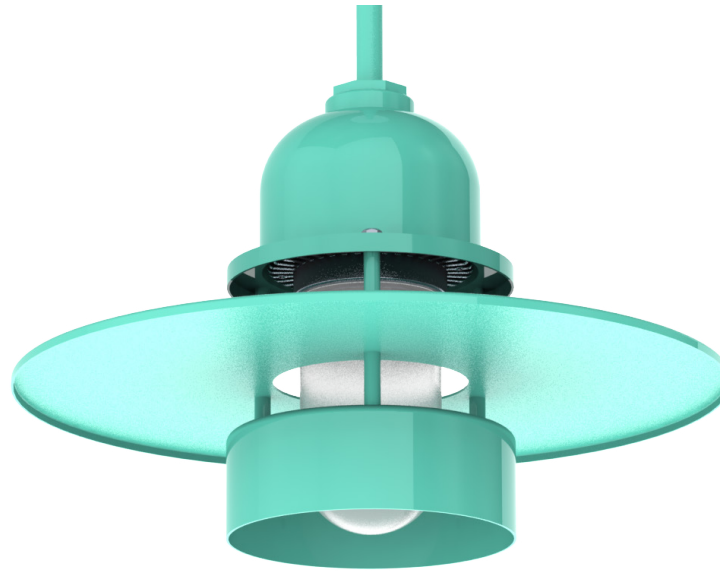

TT1610GV
 SF - Sea Foam



TT0510GV
 PL - Purple



TT1010GV
 AC - Anodic Champagne



TT1610GV
 MB- Matte Black

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES	MOUNTING ⁶	FINISH ¹⁰	WET KIT	
TT0510GV TT1010GV TT1610GV	15L 27L	1500 Lm 2700 Lm	80 CRI	EX Electronic Driver, 120V/277V ELV/MLV , 120V DS2W1 10%, 0-10V, 120V/277V DS10X 1%, 0-10V, 120V/277V DO10X 1%, 0-10V, 120V/277V DLTE1 Lutron® 2-Wire Forward Phase (MLV), 120V DL3EX 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	FJ1 3" Frosted Tall	WALL MOUNT CP104 Small Driver Canopy CP104KO Small Driver Canopy w/ Knockouts CP106 Large Driver Canopy CP6/RMD Remote Mount Driver SP90 7 Straight Arm PA 7 Mounting Arm Style	MW ¹¹ Matte White MB ¹¹ Matte Black PT ¹¹ Platinum Silver CC Custom Color See Page 5 for Full Range of Color Options (83-90083)	WLKA Wet Location Kit
			90 CRI			CEILING MOUNT RDC5 Small Driver Canopy CP13 Large Driver Canopy HM ⁸ Hang Straight AT ⁸ Hang Straight All Thread PM ⁸ Rigid Pendant Mount CD ⁸ Cord / Cable Mount CM ⁸ Cord Mount EMCR 10W Large Driver Canopy EM EMRM 7W Remote EM EMEN 7W Remote with Enclosure		

EXAMPLE: TT1610GV15L27KDS10XFJ1/RDC5CD36CO

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP106/RDC5/CP13 Only 4 Available with CP106/CP13 Only
 5 Standard Enclosure 6 See Mounting Page for Details on Components and Finishes 7 See Mounting Page for Available Arm Options
 8 Specify Length in Inches; See Mounting Page for Available Lengths 9 EMCR Replaces RDC5 or CP13
 10 See Color Page for More Options/Consult Factory for Special Finishes 11 Standard Finishes






TECH TIER SERIES DAMP / WET LOCATION TIERS

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
TT1610GV15L	1500	343	10	34
TT1610GV27L	2700	598	18	33

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS



Dimensioned with **TT1610GV**

SERIES	A	B
TT0510GV	7.5	10.7
TT1010GV	10.3	10.7
TT1610GV	16.5	10.7

APPLICATION

Tech Tier series for decorative general area lighting.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of classic lighting fixtures reimaged with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement. Available in three sizes.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

TT0510GV



TT1010GV




TT1610GV



WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

PA
MOUNTING ARM STYLE

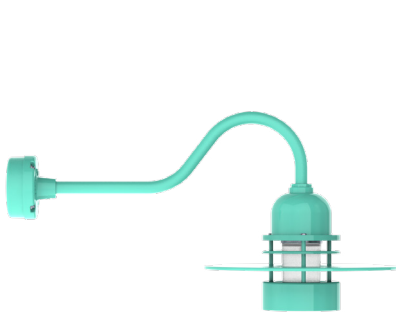

TT1610GV SHOWN WITH CP104PA23

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM
HANG STRAIGHT / ALL THREAD / PENDANT



TT1610GV SHOWN WITH RDC5PM

CD
CORD / CABLE MOUNT



TT1610GV SHOWN WITH RDC5CD

CM
CORD MOUNT



TT1610GV SHOWN WITH RDC5CM





TECH TIER SERIES

DAMP / WET LOCATION

TIERS / PHOTOMETRIC DATA

TT0510GV-27L-35K-EX-FJ1-MB

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																									
	0.00°	0° - 20°	109	14%	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr> <td>8'</td> <td>5' *</td> <td>31</td> <td>0.94</td> <td>24</td> <td>0.94</td> </tr> <tr> <td>12'</td> <td>7' **</td> <td>11</td> <td>0.32</td> <td>12</td> <td>0.46</td> </tr> <tr> <td>16'</td> <td>9' ***</td> <td>6</td> <td>0.20</td> <td>5</td> <td>0.20</td> </tr> <tr> <td colspan="2">Delivered Illuminance Rating: (DIR)</td> <td colspan="2">33 FC per W/Sq. Ft.</td> <td colspan="2">26 FC per W/Sq. Ft.</td> </tr> <tr> <td colspan="6"> 2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 83% ** Exceeds spacing criteria by 20% *** Exceeds spacing criteria by 0% </td> </tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	8'	5' *	31	0.94	24	0.94	12'	7' **	11	0.32	12	0.46	16'	9' ***	6	0.20	5	0.20	Delivered Illuminance Rating: (DIR)		33 FC per W/Sq. Ft.		26 FC per W/Sq. Ft.		2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 83% ** Exceeds spacing criteria by 20% *** Exceeds spacing criteria by 0%					
	Ceiling Height	Fixture Spacing	RCR 2					RCR 4																																					
			FC *	W/Sq. Ft.		FC *	W/Sq. Ft.																																						
	8'	5' *	31	0.94		24	0.94																																						
	12'	7' **	11	0.32		12	0.46																																						
	16'	9' ***	6	0.20		5	0.20																																						
	Delivered Illuminance Rating: (DIR)		33 FC per W/Sq. Ft.			26 FC per W/Sq. Ft.																																							
	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 83% ** Exceeds spacing criteria by 20% *** Exceeds spacing criteria by 0%																																												
	0.00°	20° - 50°	196	26%																																									
	20.00°	50° - 80°	248	33%																																									
	40.00°	80° - 90°	85	11%																																									
	60.00°	0° - 90°	637	84%																																									
	80.00°	90° - 120°	115	15%																																									
90.00°	120° - 150°	5	1%																																										
100.00°	160.00°	1																																											
110.00°	180.00°	1																																											
120.00°	Total	757	100%																																										
140.00°																																													
160.00°																																													
180.00°																																													

Delivered Lumens: 757
 Luminaire Watts: 18
 LER: 42.06

CP at 0deg (Nadir): 352
 CRI: 85+

Lamp Multiplier: 15L x 0.573
 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03

TT1010GV-27L-35K-EX-FJ1-MB

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																									
	0.00°	0° - 20°	116	18%	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr> <td>8'</td> <td>5' *</td> <td>27</td> <td>0.94</td> <td>22</td> <td>0.94</td> </tr> <tr> <td>12'</td> <td>7' **</td> <td>9</td> <td>0.32</td> <td>11</td> <td>0.46</td> </tr> <tr> <td>16'</td> <td>9' ***</td> <td>6</td> <td>0.20</td> <td>5</td> <td>0.20</td> </tr> <tr> <td colspan="2">Delivered Illuminance Rating: (DIR)</td> <td colspan="2">29 FC per W/Sq. Ft.</td> <td colspan="2">23 FC per W/Sq. Ft.</td> </tr> <tr> <td colspan="6"> 2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 86% ** Exceeds spacing criteria by 21% *** Exceeds spacing criteria by 2% </td> </tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	8'	5' *	27	0.94	22	0.94	12'	7' **	9	0.32	11	0.46	16'	9' ***	6	0.20	5	0.20	Delivered Illuminance Rating: (DIR)		29 FC per W/Sq. Ft.		23 FC per W/Sq. Ft.		2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 86% ** Exceeds spacing criteria by 21% *** Exceeds spacing criteria by 2%					
	Ceiling Height	Fixture Spacing	RCR 2					RCR 4																																					
			FC *	W/Sq. Ft.		FC *	W/Sq. Ft.																																						
	8'	5' *	27	0.94		22	0.94																																						
	12'	7' **	9	0.32		11	0.46																																						
	16'	9' ***	6	0.20		5	0.20																																						
	Delivered Illuminance Rating: (DIR)		29 FC per W/Sq. Ft.			23 FC per W/Sq. Ft.																																							
	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 86% ** Exceeds spacing criteria by 21% *** Exceeds spacing criteria by 2%																																												
	0.00°	20° - 50°	200	31%																																									
	20.00°	50° - 80°	151	23%																																									
	40.00°	80° - 90°	72	11%																																									
	60.00°	0° - 90°	539	83%																																									
	80.00°	90° - 120°	101	16%																																									
90.00°	120° - 150°	5	1%																																										
100.00°	160.00°	1																																											
110.00°	180.00°	1																																											
120.00°	Total	647	100%																																										
140.00°																																													
160.00°																																													
180.00°																																													

Delivered Lumens: 647
 Luminaire Watts: 18
 LER: 35.94

CP at 0deg (Nadir): 376
 CRI: 85+

Lamp Multiplier: 15L x 0.573
 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03

TT1610GV-27L-35K-EX-FJ1-MB

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT																																									
	0.00°	0° - 20°	116	19%	<table border="1"> <thead> <tr> <th rowspan="2">Ceiling Height</th> <th rowspan="2">Fixture Spacing</th> <th colspan="2">RCR 2</th> <th colspan="2">RCR 4</th> </tr> <tr> <th>FC *</th> <th>W/Sq. Ft.</th> <th>FC *</th> <th>W/Sq. Ft.</th> </tr> </thead> <tbody> <tr> <td>8'</td> <td>5' *</td> <td>26</td> <td>0.94</td> <td>21</td> <td>0.94</td> </tr> <tr> <td>12'</td> <td>7' **</td> <td>9</td> <td>0.32</td> <td>10</td> <td>0.46</td> </tr> <tr> <td>16'</td> <td>9' ***</td> <td>5</td> <td>0.20</td> <td>4</td> <td>0.20</td> </tr> <tr> <td colspan="2">Delivered Illuminance Rating: (DIR)</td> <td colspan="2">27 FC per W/Sq. Ft.</td> <td colspan="2">22 FC per W/Sq. Ft.</td> </tr> <tr> <td colspan="6"> 2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 88% ** Exceeds spacing criteria by 23% *** Exceeds spacing criteria by 3% </td> </tr> </tbody> </table>	Ceiling Height	Fixture Spacing	RCR 2		RCR 4		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	8'	5' *	26	0.94	21	0.94	12'	7' **	9	0.32	10	0.46	16'	9' ***	5	0.20	4	0.20	Delivered Illuminance Rating: (DIR)		27 FC per W/Sq. Ft.		22 FC per W/Sq. Ft.		2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 88% ** Exceeds spacing criteria by 23% *** Exceeds spacing criteria by 3%					
	Ceiling Height	Fixture Spacing	RCR 2					RCR 4																																					
			FC *	W/Sq. Ft.		FC *	W/Sq. Ft.																																						
	8'	5' *	26	0.94		21	0.94																																						
	12'	7' **	9	0.32		10	0.46																																						
	16'	9' ***	5	0.20		4	0.20																																						
	Delivered Illuminance Rating: (DIR)		27 FC per W/Sq. Ft.			22 FC per W/Sq. Ft.																																							
	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 88% ** Exceeds spacing criteria by 23% *** Exceeds spacing criteria by 3%																																												
	0.00°	20° - 50°	196	33%																																									
	20.00°	50° - 80°	115	19%																																									
	40.00°	80° - 90°	64	11%																																									
	60.00°	0° - 90°	491	82%																																									
	80.00°	90° - 120°	101	17%																																									
90.00°	120° - 150°	4	1%																																										
100.00°	160.00°	1																																											
110.00°	180.00°	1																																											
120.00°	Total	598	100%																																										
140.00°																																													
160.00°																																													
180.00°																																													

Delivered Lumens: 598
 Luminaire Watts: 18
 LER: 33.22

CP at 0deg (Nadir): 376
 CRI: 85+

Lamp Multiplier: 15L x 0.573
 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING


CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED
NOT AVAILABLE W/ PA16 & PA16F




CP106 - LARGE DRIVER CANOPY
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

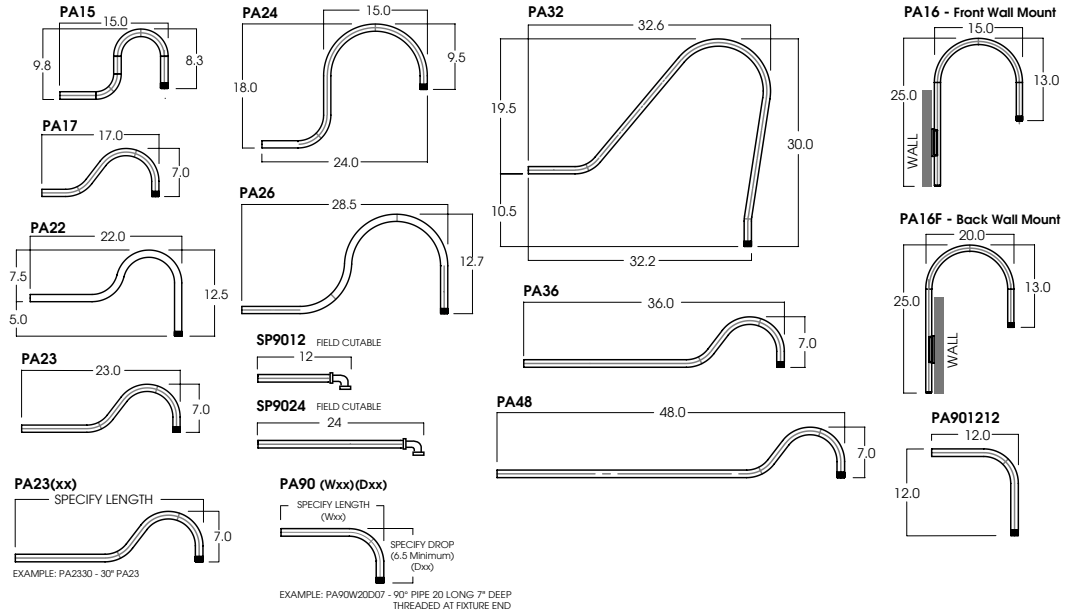


CEILING MOUNTING


RDC5 - SMALL DRIVER CANOPY (STANDARD)
MOUNTS TO 4" OCTO J-BOX



CP13 - LARGE DRIVER CANOPY




HM*
HANG STRAIGHT
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)
SPECIFY LENGTH:
HM3 - 3" HM24 - 24"
HM6 - 6" HM36 - 36"
HM12 - 12" HM48 - 48"
HM18 - 18" HM72 - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

PM*
RIGID PENDANT MOUNT
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)
SPECIFY LENGTH:
PM3 - 3" PM24 - 24"
PM6 - 6" PM36 - 36"
PM12 - 12" PM48 - 48"
PM18 - 18" PM72 - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

AT**
HANG STRAIGHT ALL THREAD
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)
SPECIFY LENGTH:
AT12 - 12"
AT24 - 24"
AT36 - 36"
AT48 - 48"
AT60 - 60"
AT72 - 72"
FIELD CUT THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER IF SHORTER THAN THREADED PIPE. SUPPLY COVER OVER THREADED PIPE.

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD WITH STRAIN RELIEF




ORDER: CM (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT


EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY




REMOTE EMERGENCY BATTERY OPTIONS

EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)



EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)



*OTHER EM BATTERY SIZES AVAILABLE. CONTACT FACTORY.



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES


FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Tier 3 - Special Metal Finishes	\$\$\$	⓪⓪⓪
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


TIER 1 - STANDARD FINISHES

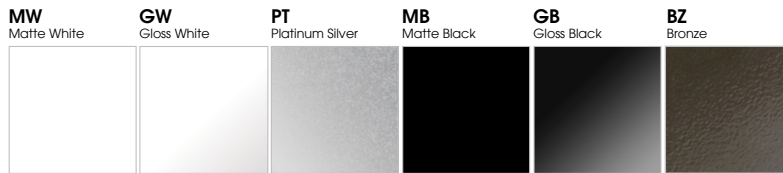

TIER 2 - TYPICAL FINISHES

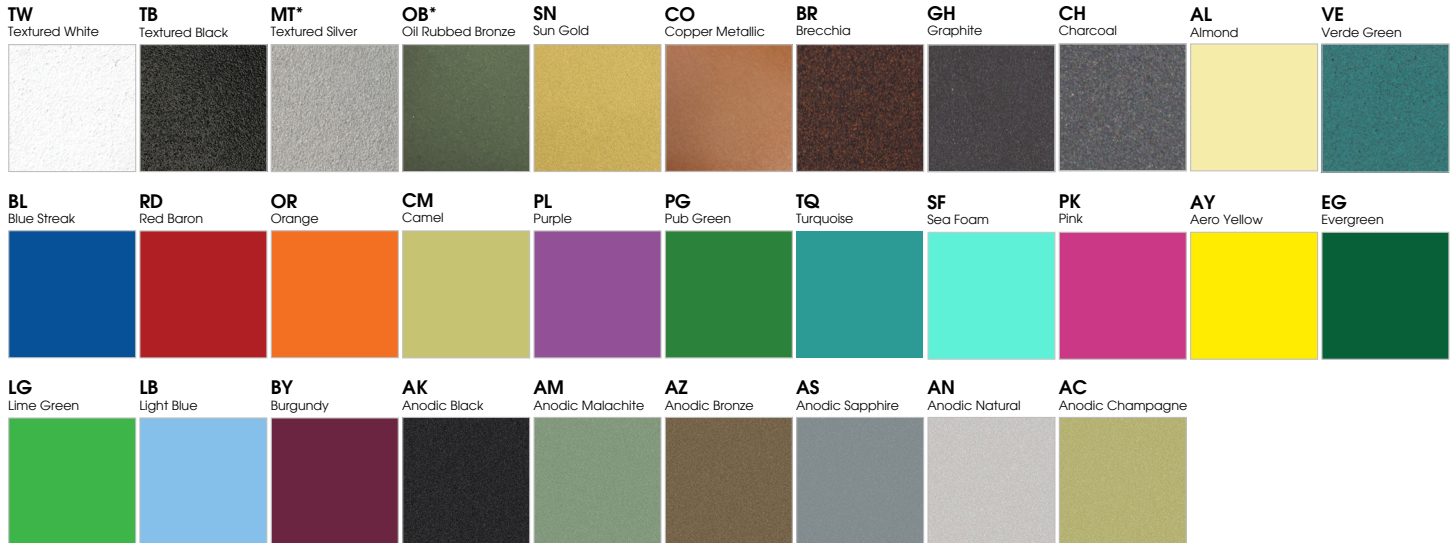

TIER 3 - SPECIAL METAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

