



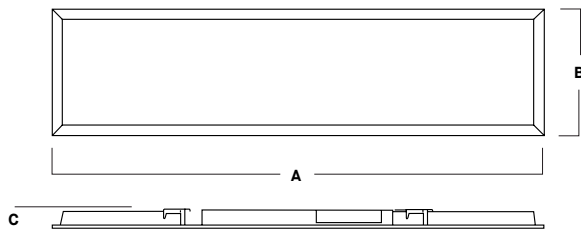

# 1' X 4' PANEL LIGHT

DAMP LOCATION  
PANELUME

PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

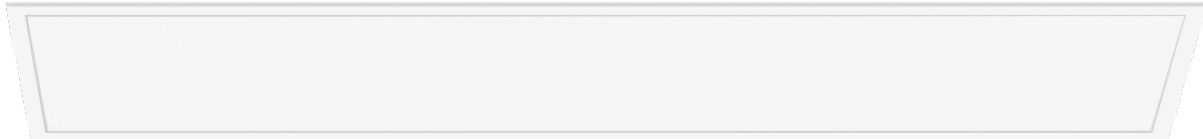

A	B	C
47.8 1213.0 mm	11.9 303.0 mm	1.9 47.0 mm

#### APPLICATION

Flat panel 1x4, 2x2, 2x4 series for grid ceiling installation and for general illumination.

#### ELECTRONICS

80 CRI Switchable Multi Lumen (2500-6400) and Multi Kelvin (30K-65K) LED system simplifies ordering. 0-10V 1% dimming driver for control of light level. Emergency Battery optional.

#### CONSTRUCTION

Powder coated aluminum housing with diffuse white acrylic lens.

#### MOUNTING

Grid ceiling.

#### FINISH

Matte white powder coat.

WATTS	MULTI LUMEN	MULTI KELVIN	
	DELIVERED LUMENS	CCT	
20W	2500Lm	30K	3000K
25W	3200Lm	35K	3500K
30W	3850Lm	40K	4000K
35W	4480Lm	50K	5000K
40W	5120Lm	65K	6500K
50W	6400Lm		

SERIES	LUMENS	CCT	DRIVER /VOLTAGE	FINISH	EM OPTIONS
FP14	ML Multi Lumen	80 CRI	DX 1%, 0-10V, 120V/277V	MW CC Matte White Custom Color	EM Emergency Battery Pack
		MK Multi Kelvin			

EXAMPLE: FP14MLMKDXMW

