
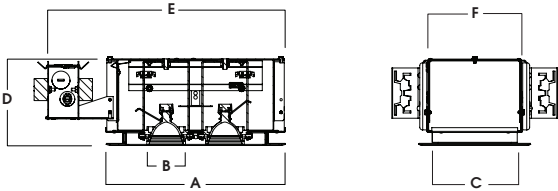


4" MODULAR ACCENT / SHALLOW PLENUM REGRESSED RAZOR EDGE FLANGELESS

MR16 SERIES / MULTI-MODULE

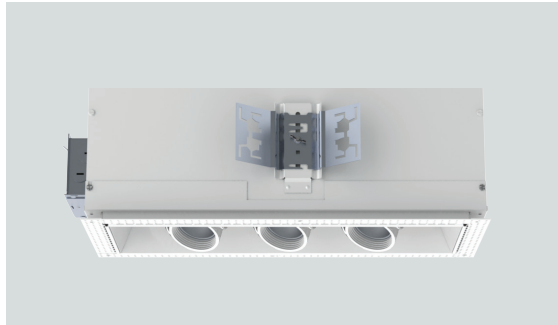

#OF MODULES	APERTURE			H	L	W	CUTOUT
	A	B	C				
1	4.5	2.3	7.3	5.0	13.4	5.4	5.1" x 5.1"
2	8.0	2.3	10.7	5.0	14.9	5.4	5.1" x 9.0"
3	12.0	2.3	13.0	5.0	20.5	5.4	5.1" x 13.0"
4	16.0	2.3	16.0	5.0	24.5	5.4	5.1" x 17.0"

RC4-DLVNF - REGRESSED RAZOR EDGE / NON-IC RATED

APPLICATION

RC4 series Shallow Plenum MR16 Low Voltage modular fixture for retail, residential and commercial accent lighting.

FEATURES

Regressed Razor Edge Flangeless for plaster ceiling install. Fixture available with 1-4 modules. Shallow 5" Plenum Depth. Fixture modules rotate 359°, lock and tilt to 40° for optimal aiming. Easy transformer and j-box access. Multi-bar adjustable mounting brackets. Posi-lock trim attachment. Front loading lamp bezel accepts up to two lens/louwer options. Integral 0.625" collar, with Deep Ceiling Extension (PR) consult factory. Maximum wattage label (MWL) for low wattage Halogen or LED lamps.

TRIM FINISH

A variety of architectural powdercoat finishes are available. Plaster mesh filter included.

ELECTRONICS

Electronic 120V transformer is standard. 277V electronic, 120V and 277V LED rated electronic and remote transformer options. High temperature rated porcelain GU10 socket. 37W per lamp max.

CONSTRUCTION

Housing formed #20 gauge galvanized steel, finished to specification. Trim fabricated from aluminum extrusion and finished to specification.

CODE COMPLIANCE

ARRA Compliant. Non-IC rated. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.

SERIES ¹	LAMPS	TRANSFORMER / VOLTAGE	OPTIONS ²	INTERIOR	TRIM	FINISHES ⁵
RC44DLVNF 1 Module	MR16	E _{LED} Electronic Driver Transformer for Use with LED MR16 Lamps	1 120V 2 277V	GL16 Clear FG16 Frosted SK16 Linear SO16 Solite Diffusion HL16 Hex Louver SN16 Snoot LN16³ Color Lens	MWI White MBI Black PTI Platinum BZI Bronze CCI Custom Color	NF144 4" x 4" NF148 4" x 8" NF1412 4" x 12" NF1416 4" x 16"
RC48DLVNF 2 Modules						
RC412DLVNF 3 Modules						
RC416DLVNF 4 Modules						

EXAMPLE: RC48DLVNFMR16E1LED/SO16SN16BH27MBI/NF148MW

NOTES:

1 PZ Filter Shipped Separately 2 See Product Options Page for Details 3 See Lens Options Page for Details 4 Contact Factory 5 Contact Factory for Special Finishes 6 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	

LED
MR16

