

BALLSTON SEMI DIRECT PENDANT

INCANDESCENT

RUSTIC SERIES

PROJECT:	
QUANTITY:	TYPE:









SERIES	ACCESSORIES		MOUNTING ¹		ACCESSORIES MOUNTING ¹			FINISH ³		LAMP ⁵
BL1317INC		Clear Glass Globe Frosted Glass Globe	CD ² CHN ² HM ² AT ²	MOUNTING ¹ Surface Mount Cord and Cable Mount Chain/Cord Hang Straight Hang Straight All Thread Rigid Pendant Mount	MB ⁴ PT ⁴ CC	Matte White Matte Black Platinum Silver Custom Color See Page 4 or Full Range of Color Options (83-90081)	BT15C_ ST19C_ ST19A_ A19C_ A19A_ A19M_ G25C_	NONE NONE NONE ILAMENT LED Clear (40W/60W) Clear (60W) Amber (40W/60W) Clear (40W/60W) Mirror (60W) Clear (40W/60W) Amber (40W) Amber (40W)		
							_	Mirror (40W) Clear (40W/60W)		

EXAMPLE: BL1317INCCGGHM36MW/G25C60W

NOTES:
1 See Mounting Pages Options and Details on Components and Finishes 2 Specify Length in Inches: See Mounting Page for Available Lengths 3 See Color Page for More Options/Consult Factory for Special Finishes 4 Standard Finishes 5 See LED Lamp Page for More Details










HOUSING DIMENSIONS



A	В
13.2	16.7
335.3 mm	424.2 mm

APPLICATION

Ballston Pendant for general decorative illumination.

FEATURES

Heavy gauge spun aluminum shade with formed glass diffuser and steel wireguard. General illumination from incandescent or LED A-lamp medium E26 base lamps. Wide range of options for mounting and finishes.

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available.

E26 Edison medium base 120V socket for incandescent or LED lamps. Lamps available from factory. Contact factory for other available socket options.

CONSTRUCTION

Luminaire shade is spun from .063 aluminum. Diffuser is formed glass and available in clear or frosted. Wireguard is formed aluminum.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HANG STRAIGHT / ALL THREAD / PENDANT



BL1317INC SHOWN WITH PM

CD CORD / CABLE MOUNT



BL1317INC SHOWN WITH CD

CM CORD MOUNT



BL1317INC SHOWN WITH CM

CHN

CHAIN / CORD



BL1317INC SHOWN WITH CHN

SM SURFACE MOUNT



BL1317INC SHOWN WITH SM

ACCESSORIES

CGG CLEAR GLASS GLOBE



BL1317INC SHOWN WITH CGG

FGG

FROSTED GLASS GLOBE



BL1317INC SHOWN WITH FGG




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS, SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECILUME SPECIFICATION FOR PENDANT MOUNTING, INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

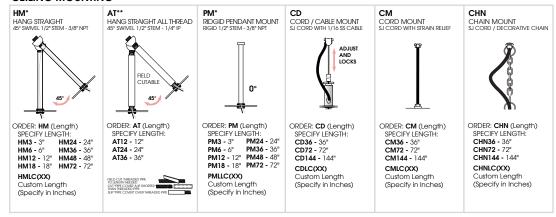

*MAXIMUM ONE PIECE STEM LENGTH IS 72", **MAXIMUM ONE PIECE STEM LENGTH IS 36", LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

PAINT TIMES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	()
Tier 2 - Typical Finishes	\$\$	00
Custom Color	Contact Factory	Contact Factory

^{*}CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC Custom Color



^{*}UNAVAILABLE FOR WET LOCATION

