



**ALUMINUM REFLECTOR  
PENDANT  
DAMP LOCATION  
XT SERIES**

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



RPEXT1014XT  
 RD - Red Baron  
 ALI - Almond Interior



RPEXT1014XT  
 PL - Purple  
 ORI - Orange Interior



RPEXT1014XT  
 BR - Brecchia  
 SNI - Sun Gold Interior



RPEXT1014XT  
 VE - Verde Green  
 SFI - Sea Foam Interior

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	MOUNTING <sup>3</sup>	INTERIOR <sup>5</sup>	FINISH <sup>6</sup>		
RPEXT1014XT RPEXT1214XT	83 CRI		<b>EX</b> Electronic Driver, 120V/277V <b>DO10X</b> 1%, 0-10V, 120V/277V <b>DS2W1</b> ELV/MLV, 120V <b>DLTE1</b> Lutron® 2-Wire Forward Phase (MLV), 120V <b>DL3EX</b> 1%, Lutron® EcoSystem®, 120V/277V	<b>HM<sup>4</sup></b> Hang Straight <b>AT<sup>4</sup></b> Hang Straight All Thread <b>PM<sup>4</sup></b> Rigid Pendant Mount <b>CD<sup>4</sup></b> Cord / Cable Mount <b>CM<sup>4</sup></b> Cord Mount <b>EMRM</b> 7W Remote EM <b>EMEN</b> 7W Remote with Enclosure	<b>MW<sup>5</sup></b> Matte White <b>CCI</b> Custom Color <b>FCI</b> Fixture Color Interior  See Page 4 for Full Range of Color Options (83-90081)	<b>MW<sup>5</sup></b> Matte White <b>MB<sup>5</sup></b> Matte Black <b>PT<sup>5</sup></b> Platinum Silver <b>CC</b> Custom Color  See Page 4 for Full Range of Color Options (83-90081)		
	10L	1000 Lm					27K	2700K
	13L	1300 Lm					30K	3000K
	20L	2000 Lm					35K	3500K
	30L	3000 Lm					40K	4000K
	40L	4000 Lm						
	98 CRI							
	10L	1000 Lm					27HK	2700K
	13L	1300 Lm					30HK	3000K
	20L	2000 Lm					35HK	3500K
30L	3000 Lm	40HK	4000K					

EXAMPLE: RPEXT1014LEDXT30L30KEX/CD36MB

**NOTES:**  
 1 Nominal Source Lumens at Any CCT 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 See Color Page for More Options/Consult Factory for Special Finishes 6 Standard Finishes






# ALUMINUM REFLECTOR PENDANT DAMP LOCATION XT SERIES

LUMENS / WATTAGE DATA		
PART NUMBER	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
RPEXT1014XT10L	1000	8
RPEXT1014XT13L	1300	12
RPEXT1014XT20L	2000	20
RPEXT1014XT30L	3000	30
RPEXT1014XT40L	4000	40

<sup>1</sup> Nominal Source Lumens at Any CCT

## HOUSING DIMENSIONS



Dimensioned with RPEXT1014XT

SERIES	A	B
RPEXT1014XT	11.7	20.8
RPEXT1214XT	14.0	22.3

## APPLICATION

The Aluminum Reflector Pendant's distinctive styling will enhance any space with efficient lighting and striking design.

## FEATURES

Speculume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Reflector pendant is available in three sizes for direct downlighting. Separate finishes may be chosen for fixture and mounting. A variety of mounting and finish options available.

## FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion. Matte white interior is standard.

## ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 1 x 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

## CONSTRUCTION

Fixtures are spun and fabricated in our factory from high purity aluminum. Fixture top is machined extruded aluminum. OSD diffusion optic lens standard.

## CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750

## SERIES SIZES

RPEXT1014XT



RPEXT1214XT



## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



RPEXT1014XT SHOWN WITH PM

CD

CORD / CABLE MOUNT



RPEXT1014XT SHOWN WITH CD

CM

CORD MOUNT



RPEXT1014XT SHOWN WITH CM



# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECULUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



## CEILING MOUNTING

<p><b>RDC5</b> - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p> <p><b>CP13</b> - LARGE DRIVER CANOPY</p>	<p><b>HM*</b> HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>HM</b> (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" <b>HMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>AT**</b> HANG STRAIGHT ALL-THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: <b>AT</b> (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" <small>FIELD CUT: THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER 3/4" SHORTER THAN THREADED PIPE. SUPPLY PIPE COVER OVER THREADED PIPE.</small></p>	<p><b>PM*</b> RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>PM</b> (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" <b>PMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CD</b> CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: <b>CD</b> (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" <b>CDLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CM</b> CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: <b>CM</b> (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" <b>CMLC(XX)</b> Custom Length (Specify in Inches)</p>
--	--	--	---	--	--

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. \*\*ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

## EMERGENCY BATTERY OPTIONS

**EMCR** - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)

## REMOTE EMERGENCY BATTERY OPTIONS

<p><b>EMRM*</b> - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p><b>EMEN*</b> - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

\*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES



## TIER 2 - TYPICAL FINISHES

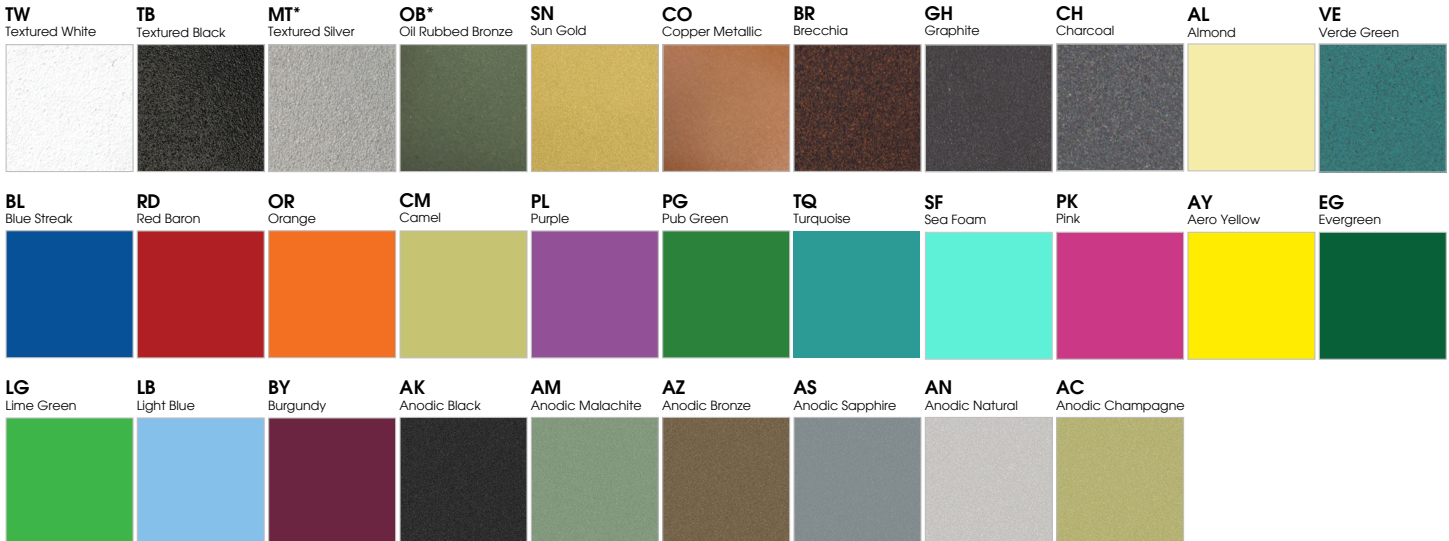

## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION

