

# 8" ROUND ADJUSTABLE ACCENT ACCENTUATOR SERIES



## C0808XT - WALL MOUNT

### APPLICATION

8" round x 8" high cylinder luminaire for accent, decorative and general illumination. Unique biaxial trim adjustable for accent lighting.

### FEATURES

Biaxial adjustable trim tilts down 20 degrees and rotates 360 degrees for optimal aiming. Spectrum's Cylinder series provides traditional architectural style with high performance and energy efficient illumination. Rugged design with flexible mounting, finish and LED options make these extremely versatile fixtures. Quick change LED module with interchangeable optics for job site flexibility and fixture upgrade.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. All exposed materials are chromate pretreated to resist corrosion.

### ELECTRONICS


LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Fabricated seamless aluminum fixture housing. Passive machined aluminum heatsink. Die-cast tilt down gimbal ring and optics bezel. Impact resistant tempered glass lenses. Stainless steel hardware. Finished to specification.

### CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

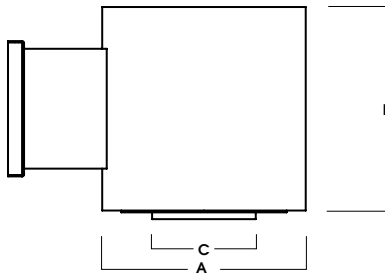

A	B	C
8.0 203.2 mm	8.0 203.2 mm	4.1 104.1 mm

Fixture Weight: 14.7 lbs

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS	DELIVERED LUMENS <sup>2</sup>	SYSTEM WAITS <sup>3</sup>	LPW
C0808XT10L	1000	899	9.1	99
C0808XT13L	1300	1211	13.0	93
C0808XT20L	2000	1863	21.7	86
C0808XT30L	3000	2794	32.6	86

SERIES	LUMENS <sup>1</sup>	CCT	OPTICS	DRIVER / DIMMING <sup>6</sup>	OPTIONS <sup>7</sup>	TRIM	MOUNTING <sup>9</sup>	FINISH <sup>10</sup>		
C0808XT	10L	1000 Lm	83 CRI	<b>EX</b> Electronic Driver, 120V/277V <b>DS10X</b> 10%, 0-10V, 120V/277V <b>DO10X</b> 1%, 0-10V, 120V/277V	<b>FS</b> Fuse Holder and Fuse	<b>TCY</b> Same Color as Cylinder <b>TCC</b> Custom Color	<b>WM3</b> Wall Mount 3" Extension <b>WMS</b> Wall Mount 5" Extension	<b>MW<sup>11</sup></b> Matte White <b>MB<sup>11</sup></b> Matte Black <b>PT<sup>11</sup></b> Platinum Silver <b>CC</b> Custom Color		
	13L	1300 Lm	27K 2700K						<b>XN<sup>5</sup></b> 16°	<b>ND</b> 20°
	20L	2000 Lm	30K 3000K						<b>MD</b> 21°	<b>WD</b> 40°
	30L	3000 Lm	35K 3500K							
			40K 4000K							
		98 CRI <sup>4</sup>						See Page 5 for Full Range of Color Options (83-90095)		
		27HK 2700K			<b>NL</b> No Lens	<b>EMRM</b> 7W Remote EM				
		30HK 3000K			<b>GL<sup>8</sup></b> Clear Glass Lens	<b>EMEN</b> 7W Remote with Enclosure				
		35HK 3500K			<b>SO</b> Micro Prism Solite™ Lens					
		40HK 4000K								

**EXAMPLE:** C0808XT20L30KMDEX/TCYSO/WM3/MW

**NOTES:**  
 1 Nominal Source Lumens At Any CCT    2 Nominal Delivered Lumens at 83 CRI at Any CCT with ND-GL    3 At 83 CRI    4 20L Max    5 13L Max/XN not Available with 98 CRI Option    6 Contact Factory for Additional Options  
 7 See Product Options Page for Details    8 Standard Lens    9 See Mounting Page for Details on Components and Finishes    10 See Color Page for More Options/Consult Factory for Special Finishes    11 Standard Finishes



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

# 8" ROUND ADJUSTABLE ACCENT

## ACCENTUATOR SERIES / FIXTURE OPTIONS



### STANDARD FINISHES

**MW**  
MATTE WHITE



**MB**  
MATTE BLACK




**PT**  
PLATINUM SILVER




### WALL MOUNT DETAIL

**WM3**  
WALL MOUNT 3" EXTENSION



A	B	C	D
2.4	6.4	4.7	11.7
61.0 mm	162.6 mm	119.4 mm	297.2 mm


**WM5**  
WALL MOUNT 5" EXTENSION

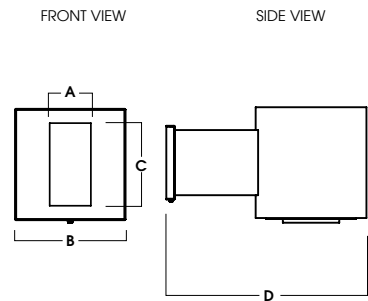

A	B	C	D
2.4	6.4	4.7	14.5
61.0 mm	162.6 mm	119.4 mm	368.3 mm


### EMERGENCY BATTERY OPTIONS

**EMRM\*** - 7W REMOTE EMERGENCY BATTERY  
(50' MAX)



A	B	C
1.3	12.6	13.0

**EMEN\*** - 7W REMOTE EMERGENCY BATTERY  
WITH ENCLOSURE (50' MAX)



A	B	C
2.0	17.0	6.2


\*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY

# 8" ROUND ADJUSTABLE ACCENT

## ACCENTUATOR SERIES / PHOTOMETRIC DATA



### C0808XT-30LxxK-NDEX-TCY-GLxxMW

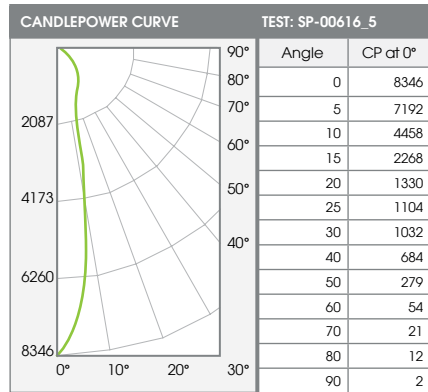

ZONAL LUMENS		
0-10	583	21%
0-20	1229	44%
0-30	1738	62%
0-40	2272	81%
0-60	2720	97%
0-80	2780	99%
0-90	2794	100%
Total Lumens	2794	100%


### 30L NARROW - 83 CRI

SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	276	2.0'	134
6.5'	198	2.3'	96
7.5'	148	2.7'	72
8.5'	116	3.0'	56
10.0'	83	3.6'	40
12.0'	58	4.3'	28
14.0'	43	5.0'	21
16.0'	33	5.7'	16

\* From aperture to horizontal surface below.  
\*\* At IESNA defined Beam Angle, to 50% Max. CP.

Delivered Lumens: 2794    CP @ 0° (Nadir): 8346    Spacing Ratio: 0.36  
 Luminaire Watts: 32.6    Beam Angle: 20.3°    Output Multipliers: 10L x 0.32, 13L x 0.43, 20L x 0.67  
 LER: 86    CRI: 83

### C0808XT-30LxxK-MDEX-TCY-GLxxMW

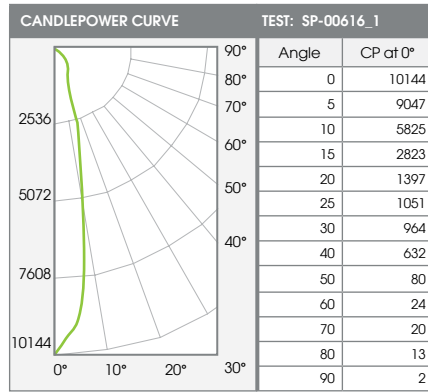

ZONAL LUMENS		
0-10	724	26%
0-20	1511	53%
0-30	2008	71%
0-40	2515	89%
0-60	2764	98%
0-80	2814	99%
0-90	2828	100%
Total Lumens	2829	100%


### 30L MEDIUM - 83 CRI

SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	335	2.0'	162
6.5'	240	2.4'	116
7.5'	180	2.8'	87
8.5'	140	3.2'	68
10.0'	101	3.7'	49
12.0'	70	4.5'	34
14.0'	52	5.2'	25
16.0'	40	6.0'	19

\* From aperture to horizontal surface below.  
\*\* At IESNA defined Beam Angle, to 50% Max. CP.

Delivered Lumens: 2829    CP @ 0° (Nadir): 10144    Spacing Ratio: 0.4  
 Luminaire Watts: 32.6    Beam Angle: 21.1°    Output Multipliers: 10L x 0.32, 13L x 0.43, 20L x 0.67  
 LER: 87    CRI: 83

### C0808XT-30LxxK-WDEX-TCY-GLxxMW

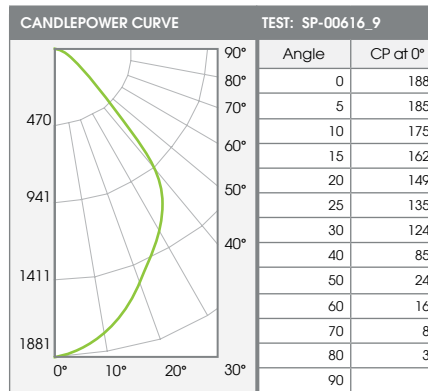

ZONAL LUMENS		
0-10	171	6%
0-20	620	23%
0-30	1239	47%
0-40	1902	72%
0-60	2433	92%
0-80	2628	99%
0-90	2650	100%
Total Lumens	2652	100%

### 30L WIDE - 83 CRI

SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	62	4.3'	27
6.5'	45	5.1'	19
7.5'	33	5.9'	15
8.5'	26	6.6'	11
10.0'	19	7.8'	8
12.0'	13	9.4'	6
14.0'	10	10.9'	4
16.0'	7	12.5'	3

\* From aperture to horizontal surface below.  
\*\* At IESNA defined Beam Angle, to 50% Max. CP.

Delivered Lumens: 2652    CP @ 0° (Nadir): 1881    Spacing Ratio: 1.02  
 Luminaire Watts: 32.6    Beam Angle: 42.7°    Output Multipliers: 10L x 0.32, 13L x 0.43, 20L x 0.67  
 LER: 81    CRI: 83

# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES


FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES

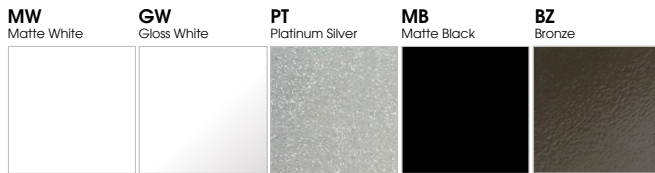

## TIER 2 - TYPICAL FINISHES

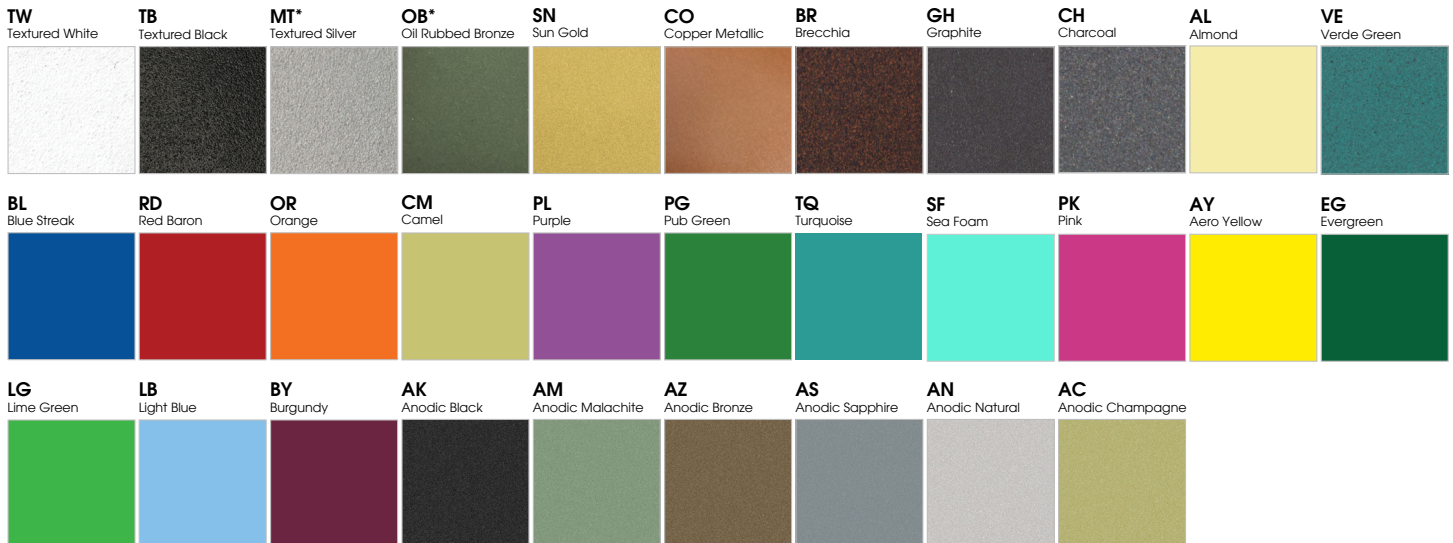

## CUSTOM COLOR FINISHES

CONTACT FACTORY

CC  
Custom Color



\*UNAVAILABLE FOR WET LOCATION