





**MINI DOCK LIGHT**  
**DAMP / WET LOCATION**  
**HMI SERIES**

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

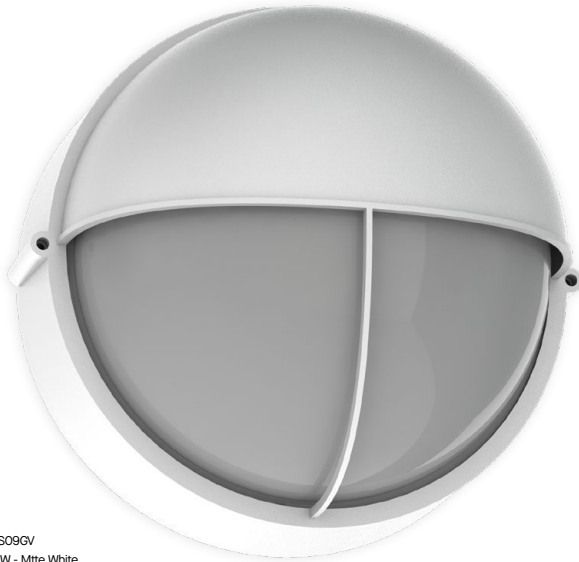

DS09GV  
 MW - Matte White

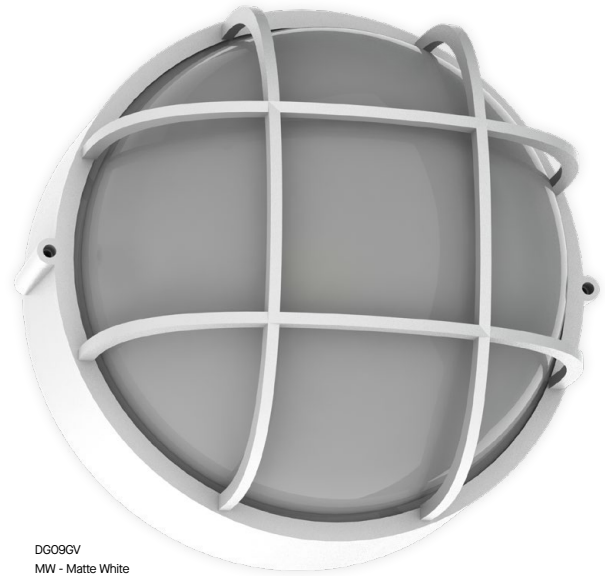

DG09GV  
 MW - Matte White

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	MOUNTING <sup>3</sup>	FINISH <sup>4</sup>	WET KIT
<b>DG09GV</b> Lens/Grille  <b>DS09GV</b> Lens/Eyelid	<b>15L</b> 1500 Lm	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K	<b>EX</b> Electronic Driver, 120V/277V <b>DS2W1</b> ELV/MLV, 120V <b>DO10X</b> 1%, 0-10V, 120V/277V	<b>SM</b> Surface Mount	<b>MW<sup>5</sup></b> Matte White <b>MB<sup>5</sup></b> Matte Black <b>PT<sup>5</sup></b> Platinum Silver <b>CC</b> Custom Color  See Page 5 for Full Range of Color Options (83-90083)	<b>WLKA</b> Wet Location Kit

EXAMPLE: DG09GV15L30KEX/SM/MW

NOTES:  
 1 Nominal Source Lumens at 3500K 2 Contact Factory for Additional Options 3 May be Ceiling or Wall Mounted  
 4 See Color Page for More Options/Consult Factory for Special Finishes 5 Standard Finish






**MINI DOCK LIGHT**  
**DAMP / WET LOCATION**  
**HMI SERIES**

LUMENS / WATTAGE DATA		
PART NUMBER	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
DG09GV 15L	1500	8,1

<sup>1</sup> Nominal Source Lumens at 35K

**HOUSING DIMENSIONS**

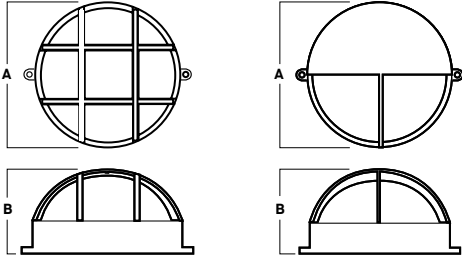

**DG09GV**  
 Lens/Grille

**DS09GV**  
 Lens/Eyelid

SERIES	A	B
DG09GV	10,5	6,0
DS09GV	10,5	6,25

**APPLICATION**

Mini Dock Light LED Series for area lighting.

**FEATURES**

Spectrum Lighting's RLM series are classic lighting fixture designs reimagined with modern LED light sources and materials. Fixtures may be wall or ceiling mounted. LED module and driver are serviceable for future replacement and maintenance. Available as surface mount only.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

**ELECTRONICS**

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**

Fixtures are die-cast aluminum. Gasket are machine cut neoprene. Glass is molded heavy wall.

**CODE COMPLIANCE**

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES


FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Tier 3 - Special Metal Finishes	\$\$\$	⓪⓪⓪
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


## TIER 1 - STANDARD FINISHES

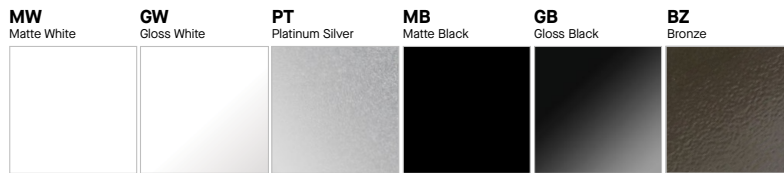

## TIER 2 - TYPICAL FINISHES



## TIER 3 - SPECIAL METAL FINISHES



## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION

