



DECORATIVE SOCKET PENDANT

SOCKET SERIES / EDISON E26

PROJECT: _____
 QUANTITY: _____ TYPE: _____



DSP-INC - INTERIOR ONLY / DAMP LOCATION

APPLICATION

Decorative socket pendant for use with LED and incandescent lamps. INC Series is designed for indoor locations.

FEATURES

Minimalist design highlights lamp. Works with most medium base incandescent and LED lamps. See page 2 for available lamps. Variety of color and finish options for custom combinations.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS


E26 Edison medium base 120V socket for incandescent or LED lamps. Contact factory for other available socket options.

CONSTRUCTION

Components made in our factory from spun, stamped and fabricated aluminum and steel. 3 conductor, 18 awg. pvc insulated cord with high quality braided nylon cloth. Cord may be field cut and shortened.

CODE COMPLIANCE

BAA Compliant. ETL listed for dry/damp locations. Manufactured and tested to UL standards No. 1598/8750.

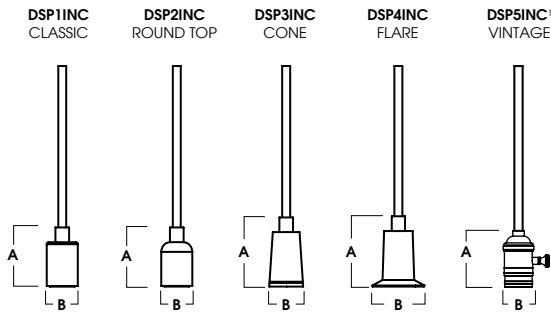

| SERIES | A | B |
|----------------------|-----|-----|
| DSP1INC | 3.0 | 1.8 |
| DSP2INC | 3.0 | 1.8 |
| DSP3INC | 3.5 | 2.8 |
| DSP4INC | 3.6 | 2.9 |
| DSP5INC ¹ | 2.7 | 1.3 |

| SERIES | SOCKET FINISH | MOUNTING | CORD FINISH | CANOPY TYPE ³ | CANOPY FINISH | LAMP ⁵ |
|---------------------------------|------------------------------|---|---|---|--|------------------------|
| DSP1INC CLASSIC | GW Gloss White | CM36 36" Cord Mount CM72 72" Cord Mount CM120 120" Cord Mount CMLC(XX) Custom Length | WC White BC Black SC Silver TC Teal NC Wine KC Beige QC Turquoise RC Red YC Yellow BTC Black/Brown BWC Black/White OC Burnt Orange GC Green CC ² Custom Color | R51 Round Single Socket Canopy S51 Square Single Socket Canopy R73 Round Three Socket Canopy S74 Square Four Socket Canopy S712 Square Twelve Socket Canopy | MW Matte White MB Matte Black CC ² Custom Color | NONE |
| | MB Matte Black | | | | | N None |
| DSP2INC ROUND TOP | BZ Bronze | | | | | FILAMENT LED |
| | PT Platinum Silver | | | | | BT15C_ Clear (40W/60W) |
| DSP3INC CONE | GA Galvanized | | | | | ST19C_ Clear (60W) |
| | SN Sun Gold | | | | | ST19A_ Amber (40W/60W) |
| DSP4INC FLARE | EG Evergreen | | | | | A19C_ Clear (40W/60W) |
| | BL Blue Streak | | | | | A19A_ Amber (40W) |
| DSP5INC ¹ VINTAGE | AY Aero Yellow | | | | | A19M_ Mirror (60W) |
| | RD Red Baron | | | | | G25C_ Clear (40W/60W) |
| | CO Copper Metallic | | | | | G25A_ Amber (40W) |
| | CRO Chrome | | | | | G25M_ Mirror (40W) |
| | PB Polished Brass | | | | | G40C_ Clear (40W/60W) |
| | CC ² Custom Color | | | | | |
| | | | | ACCESSORIES | | |
| | | | | SWH ⁴ Swag Hook Kit | | |

EXAMPLE: DSP1INC GW CM36 BC R51 MW/A19C60

NOTES:
 1 Available MW/MB/PB Only 2 Consult Factory 3 See Second Page for Details 4 One Kit Per Socket, See Second Page for Details 5 See LED Lamp Page for More Details





DECORATIVE SOCKET SERIES

OPTIONS PAGE

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. PLEASE SPECIFY ENCLOSURE WHEN ORDERING FIXTURES.
NOTE: FROSTED JAR PRODUCES BEST RESULTS WITH LED FIXTURES

SOCKET - CHOOSE DECORATIVE SOCKET COVER STYLE

DSP1INC - CLASSIC



DSP2INC - ROUND TOP



DSP3INC - CONE



DSP4INC - FLARE



DSP5INC - VINTAGE



SOCKET - CHOOSE DECORATIVE SOCKET FINISH

GW
Gloss White




MW
Matte White




MB
Matte Black




BZ
Bronze



PT
Platinum Silver



GA
Galvanized



SN
Sun Gold



EG
Evergreen



BL
Blue Streak




AY
Aero Yellow



RD
Red Baron



CO
Copper Metallic



CORD - CHOOSE CORD COLOR

WC
White



BC
Black



SC
Silver



TC
Teal



NC
Wine



KC
Beige



QC
Turquoise



RC
Red



YC
Yellow



BTC
Black/Brown



BWC
Black/White



OC
Burnt Orange



GC
Green



CANOPY - CHOOSE CANOPY TYPE

R51 - 5" 1 x ROUND



R73 - 7" 3 x ROUND




S51 - 5" 1 x SQUARE



S74 - 7" 4 x SQUARE



S712 - 7" 12 x SQUARE



CANOPY - CHOOSE CANOPY FINISH

MW
Matte White



MB
Matte Black



LAMP - CHOOSE LAMP

NOTE: SEE LAMP OPTIONS PAGE FOR INDIVIDUAL SPECIFICATIONS

B715C



ST19C / ST19A



A19C / A19A / A19M



G25C / G25A / G25M




G40C



SWH - SWAG HOOK KIT

NOTE: ONE KIT INCLUDES 2 STEEL DRYWALL HOOKS AND 2 STEEL JOIST HOOKS

DRYWALL HOOK



| A | B |
|---------|---------|
| 3.75 | 1.25 |
| 95.3 mm | 31.8 mm |

JOIST HOOK



| A | B |
|---------|---------|
| 2.25 | 0.75 |
| 57.2 mm | 19.0 mm |





DECORATIVE SOCKET SERIES

LED LAMP OPTIONS

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR LAMP OPTIONS. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.

BT15 - BLOWN TUBULAR

BT15C - CLEAR



| SERIES | FINISH | CCT | EQUIV. | LMS | WATTS | LPW | CRI |
|---------|--------|------|--------|-----|-------|-----|-----|
| BT15C40 | CLEAR | 2700 | 40 | 450 | 4.5 | 100 | 80 |
| BT15C60 | | | 60 | 810 | 6.5 | 125 | 80 |

ST19 - STRAIGHT TUBULAR

ST19C - CLEAR ST19A - AMBER



| SERIES | FINISH | CCT | EQUIV. | LMS | WATTS | LPW | CRI |
|---------|--------|------|--------|-----|-------|-----|-----|
| ST19C60 | CLEAR | 2700 | 60 | 810 | 6.5 | 125 | 80 |
| ST19A40 | AMBER | 2300 | 40 | 400 | 4.5 | 89 | 80 |
| ST19A60 | | | 60 | 650 | 6.5 | 100 | 80 |

A19 - A LAMP

A19C - CLEAR A19A - AMBER A19M - MIRROR



| SERIES | FINISH | CCT | EQUIV. | LMS | WATTS | LPW | CRI |
|--------|--------|------|--------|-----|-------|-----|-----|
| A19C40 | CLEAR | 2700 | 40 | 450 | 4.5 | 100 | 80 |
| A19C60 | | | 60 | 810 | 6.5 | 125 | 80 |
| A19A40 | AMBER | 2200 | 40 | 380 | 4.5 | 84 | 80 |
| A19M60 | MIRROR | 2700 | 60 | 650 | 6.5 | 100 | 80 |

G25 - GLOBE

G25C - CLEAR G25A - AMBER G25M - MIRROR



| SERIES | FINISH | CCT | EQUIV. | LMS | WATTS | LPW | CRI |
|--------|--------|------|--------|-----|-------|-----|-----|
| G25C40 | CLEAR | 2700 | 40 | 450 | 4.5 | 100 | 80 |
| G25C60 | | | 60 | 810 | 6.5 | 125 | 80 |
| G25A40 | AMBER | 2200 | 40 | 380 | 4.5 | 84 | 80 |
| G25M40 | MIRROR | 2700 | 40 | 430 | 4.5 | 96 | 80 |

G40 - GLOBE

G40C - CLEAR



| SERIES | FINISH | CCT | EQUIV. | LMS | WATTS | LPW | CRI |
|--------|--------|------|--------|-----|-------|-----|-----|
| G40C40 | CLEAR | 2700 | 40 | 450 | 4.5 | 100 | 80 |
| G40C60 | | | 60 | 810 | 6.5 | 125 | 80 |

