

6" VERTICAL FLUORESCENT OPEN /WALL WASH/LENS


1 x 42 WATT MAX

6VF
SPECTRUM
SILVER SERIES™




- 6" vertical lamp compact fluorescent.
- Available open, lensed, and wall wash.
- 20 gauge galvanized steel frame.
- 12" bar hangers expandable to 24" standard.
- .0625 spun aluminum reflector.
- Junction box pre-wired, grounded.
- Electronic ballast 120/277v standard.
- Ballast serviceable from the ceiling aperture.
- Suitable for use in damp location. Lensed fixture has Wet Location option.
- UL listed to standard no. 1598.

SIDE VIEW

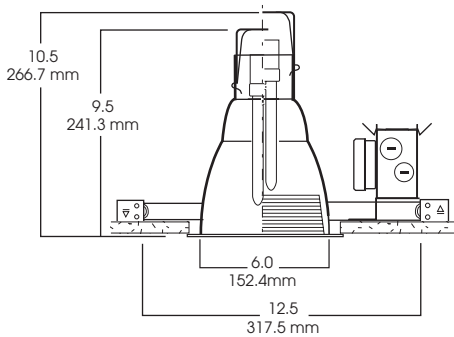


TOP VIEW

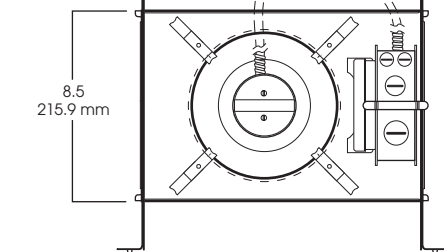

DISTANCE FROM CEILING	26	16.0	DIAMETER OF CIRCLE
5.5			21.0
7.5	14		27.0
9.5	9		33.0
11.5	6		39.0
13.5	4		

CONE OF LIGHT

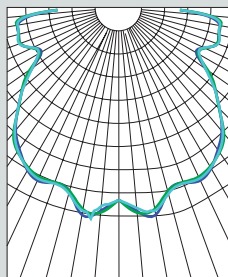



SP6V132 6410SG-
Efficiency: 68.1%
Spacing: 1.40

1. SPECIFY FRAME

FRAME	WATTS	BALLAST	OPTIONS
SP6VF-	13	EX -Electronic, multi-volt 120v thru 277v	EM -Emergency battery pack (specify voltage)
Spectrum Silver	18	DA1 -Advance Mark 10™ powerline dimming, 120v ¹	FS -Fuse holder and fuse
6" Vertical	26	DA2 -Advance Mark 10™ powerline dimming, 277v ¹	PR -Plaster ring (pg 1-430)
	32	DM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v	RM -Remodler housing
	42	DL1 -Lutron Compact SE™ 120v (min. dimming level 5%) ¹	BH27 -27" mounting bar
		DL2 -Lutron Compact SE™ 277v (min. dimming level 5%) ¹	TBC -T-bar clip
SP6VF	142	EX	

2. SPECIFY TRIM

OPEN	LENSED
------	--------

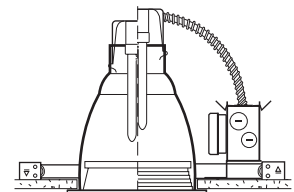

TRIM #	FINISH	OPTIONS	TRIM #	SPLAY FINISH	LENS/OPTIONS
6410	SG -Sift Glow	GS -Gasket	6420	WS -White /	PG -Prismatic Glass
Open	CL -Clear Bright Alzak	BB -Black Micro Baffle	Lens	White flange	lens (standard)
	GO -Gold Alzak	WB -White Micro Baffle		(standard)	FG -Frosted Glass
	HZ -Matte Low			SGS -Soft Glow/	FL -Fresnel Lens
	Iridescent			White flange	GL -Clear Glass lens
6490	PW -Pewter Alzak			RB -Regressed	GS -Gasket
Wall	UM -Umber Alzak			Black baffle	PC -Clear
Wash	WE -Wheat Alzak			White flange	Polycarbonate
	BL -Black Finish			RW -Regressed	PP -Prismatic
	WH -White Finish			White baffle	Polycarbonate
	PF -Polished Flange			White flange	WL -Wet Location
				PF -Polished	1-470
				Flange	XB -Cross Blade
				BF -Black Flange	Louver
AR6410	SG	GS	6420	WS	PG

3. FINISHED ORDER/SPECIFICATION

SP6VF132EX/6410 SG PF

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

994 Jefferson Street, Fall River, MA 02721 508.678.2303 FAX 508.678.2260

