

TWY7

7" WALL WASH TRACK LUMINAIRE

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5200 lumens delivered.

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS	SYSTEM WATTS	LPW
TWY7 25L	2483	19.3	129
TWY7 35L	3386	27.1	125
TWY7 50L	5329	41	130

1 Nominal Delivered Lumens at 50L 35K xx BET MW

PROJECT:

QUANTITY:

TYPE:



SERIES
Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5300 lumens delivered.

180° of vertical tilt with degree indexing.

350° horizontal rotation.

Soft etch lens for visual comfort and protection of LED from dust.

For use with Spectrum BET Basix track system (Juno Compatible)

LISTING
cULus Certified. Suitable for dry locations.

PRODUCT SELECTOR GUIDE

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES	
TW	Y7	50L		E1	BET		+	

EXAMPLE

TW	Y7	50L	35K	E1	BET	MW	+	
----	----	-----	-----	----	-----	----	---	--





SERIES	FAMILY		LUMENS		CCT		DIMMING		ADAPTOR		FINISH		ACCESSORIES	
▪TW	▪Y7	7" Wall Wash	25L	2500 Lm	80 CRI		▪E1	Electronic Low-Voltage (ELV) , 120V	▪BET	Basix 1 CIR/1 NEUT 120V	▪MW	Matte White	ORDER SEPARATELY	
			35L	3500 Lm	30K	3000K							BET70WH	Mono Point Canopy White
			▪50L	5300 Lm	▪35K	3500K								
					40K	4000K								
1 Nominal Delivered Lumens														

■ DLC PREMIUM LISTED OPTIONS



COPYRIGHT 2023 SPECTRUM LIGHTING, INC.

FIXTURE DIMENSIONS

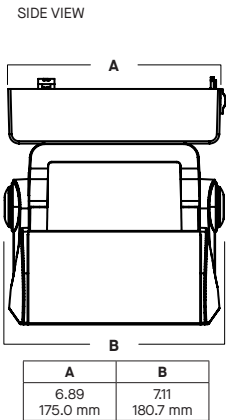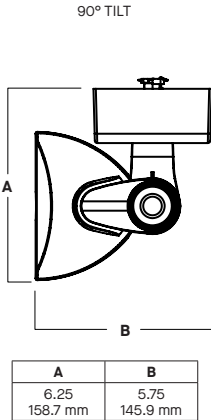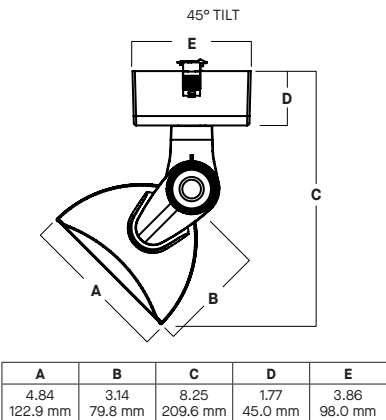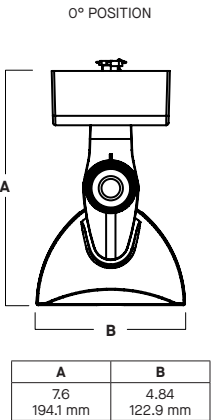

FIXTURE ACCESSORIES

BET70WH
MONO POINT CANOPY




TWY7 50L 35K xx BET MW


CANDLEPOWER CURVE
TEST SP-01383

PERFORMANCE SUMMARY


REFERENCE DIAGRAM

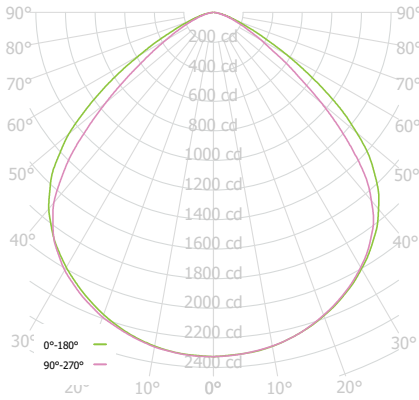


Delivered Lumens: 5329
Luminaire Watts: 41
LER: 129.98
CP at 0deg (Nadir): 2326
CRI: 80+
Lumen Multiplier: N/A, only 50L tested
CCT Multiplier: 30K x 0.93, 40K x 1.0

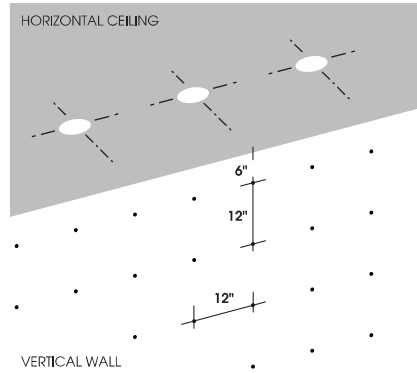


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

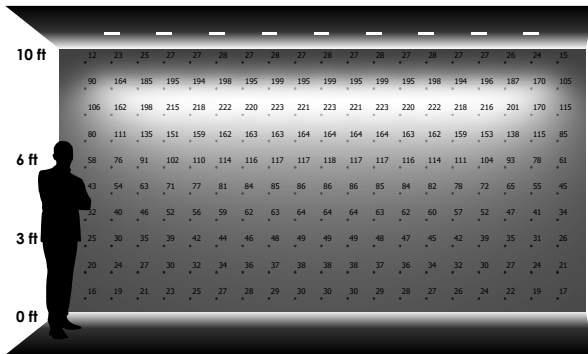


9 LUMINAIRES
2' - 0" away from wall
2' - 0" between luminaires

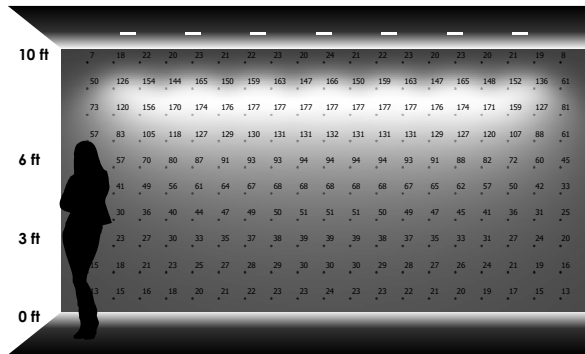

7 LUMINAIRES
2' - 6" away from wall
2' - 6" between luminaires

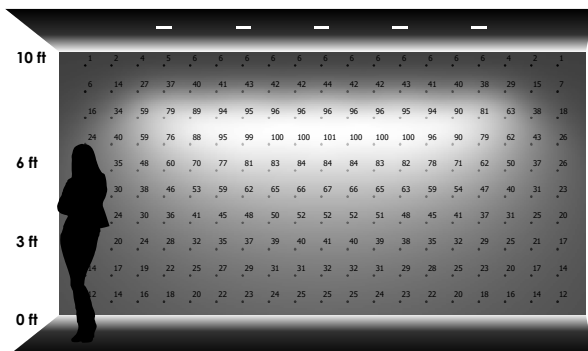

5 LUMINAIRES
3' - 0" away from wall
3' - 0" between luminaires

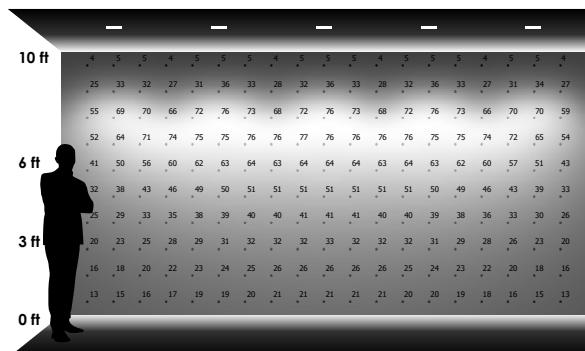

5 LUMINAIRES
3' - 0" away from wall
4' - 0" between luminaires