


INSULATED CEILING SPECIFICATIONS AND LIMITATIONS



- Consult factory before ordering dimming ballasts with IC fixtures.
- Insulated Ceiling housings are constructed so that when installed, insulation may be brought up to (and touch) the housing
- The standard enclosure is built on the SPECTRUM architectural frame.
- When the enclosure is fully gasketed it is suitable for **AT-** Airtight operation as well.

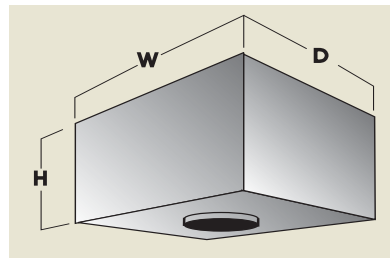

INCANDESCENT LOW VOLTAGE

IC Housing	7" Deep	4" LV	MAX WATTAGE				
			W	D	H		
4" LV	7" Deep	4" LV	SGDG4XIC7D	50W	16.0	12.5	7.0
			SGAG4XIC7D	50W	16.0	12.5	7.0
4" LV	7" Deep	4" LV	SGDG4X	50W	16.0	12.5	8.5
			SGAG4X	50W	16.0	12.5	8.5
			SGDG4SQ	50W	16.0	12.5	8.5
			SGAG4SQ	50W	16.0	12.5	8.5

INCANDESCENT

4"	7"	4"	SG4IN	75W	16.0	12.5	8.5
			SG4SQ	75W	16.0	12.5	8.5
			SGDC4IN	75W	16.0	12.5	8.5
			SGA4IN	75W	16.0	12.5	8.5
			SGL4IN	50W	16.0	12.5	8.5
			SGD4SQIN	75W	16.0	12.5	8.5
5"	7"	5"	SGA4SQIN	75W	16.0	12.5	8.5
			SGL4SQIN	50W	16.0	12.5	8.5
			SG5IN	75W	16.0	12.5	8.5
			SGD5IN	75W	16.0	12.5	8.5
			SGA5IN	75W	16.0	12.5	8.5
			SGL5IN	37W	16.0	12.5	8.5
6"	7"	6"	SGIC6	75W	16.0	12.5	8.5
			SG6IN (LENS)	50W	16.0	12.5	8.5
			SG6SQIN	75W	16.0	12.5	8.5
			SGD6IN	75W	16.0	12.5	8.5
			SGA6IN	75W	16.0	12.5	8.5
			SGL6IN	50W	16.0	12.5	8.5
			SGD6SQIN	75W	16.0	12.5	8.5
			SGASQ6IN	75W	16.0	12.5	8.5
			SGLSQ6IN	50W	16.0	12.5	8.5
			SG7IN	100W	16.0	12.5	10.5
7"	7"	7"	SG7IN(LENS)	75W	16.0	12.5	10.5
			SGD7IN	100W	16.0	12.5	8.5
			SGA7IN	100W	16.0	12.5	8.5
			SGL7IN	75W	16.0	12.5	8.5
			SG8IN	100W	16.0	12.5	10.5
			SG8IN (LENS)	75W	16.0	12.5	10.5
			SGD8IN	100W	16.0	12.5	8.5
			SGA8IN	100W	16.0	12.5	8.5
8"	7"	8"	SGL8IN	75W	16.0	12.5	8.5

COMPACT FLUORESCENT (Consult Factory for Dimming)

IC Housing	7" Deep	4"	5"	6"	7"	8"	MAX WATTAGE				
							W	D	H		
4"	7" Deep	4"	5"	6"	7"	8"	SG4H	126W	16.0	12.5	8.5
							SG5H	126W	16.0	12.5	8.5
5"	7" Deep	5"	6"	7"	8"	8"	SG5V	142W	16.0	12.5	8.5
							SG6H	126W	16.0	12.5	8.5
6"	7" Deep	6"	7"	8"	8"	8"	SG6V	132W	16.0	12.5	8.5
							SG7H	142W	16.0	12.5	8.5
7"	7" Deep	7"	8"	8"	8"	8"	SG7V	142W	16.0	12.5	10.5
							SG8H	242W	16.0	12.5	8.5
8"	7" Deep	8"	8"	8"	8"	8"	SG8V	142W	16.0	12.5	10.5

SPECIFYING IC FIXTURES

MODEL	LAMPS	BALLAST	OPTIONS	TRIM	LENS
Select Fixture Series	Choose Lamp and Wattage	Specify Ballast Consult Factory for Dimming Limits	Choose the Insulated Ceiling Option	Choose Reflector or Trim	Choose Lens, Wet Location or Decorative trim
<u>SG7V</u>	<u>126</u>	<u>EX/</u>	<u>IC-Insulated Ceiling</u>	<u>AR7125 SG</u>	<u>PG</u>