



5" HORIZONTAL FLUORESCENT LENSED SPLOY


1 x 26 WATT MAX

5H
SPECTRUM
GOLD SERIES™


FEATURES & SPECIFICATIONS:

- SG5H lensed series features shallow height and lensed aperture.
- Intended for Non-IC new construction.
For IC applications, refer to page 1-400.
- Frame constructed of 20 ga. galvanized steel.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Ballasts shall be integrally mounted, electronic sound rated "A", Class P, multi-volt 120v - 277v.
- UL Listed for Damp Locations.
- For options detail, see page numbers listed below.



Max Ceiling Thickness: 1.5 (38.1 mm)
Ceiling Cutout: 5.5 Ø (139.7 mm Ø)
Fixture Weight: 4.4 lbs

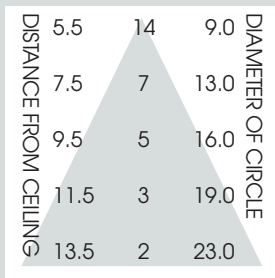

CONE OF LIGHT

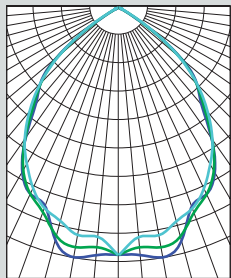

5H126w - Efficiency: 39.1%
Spacing: 1.16

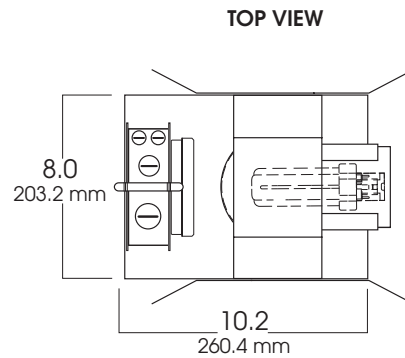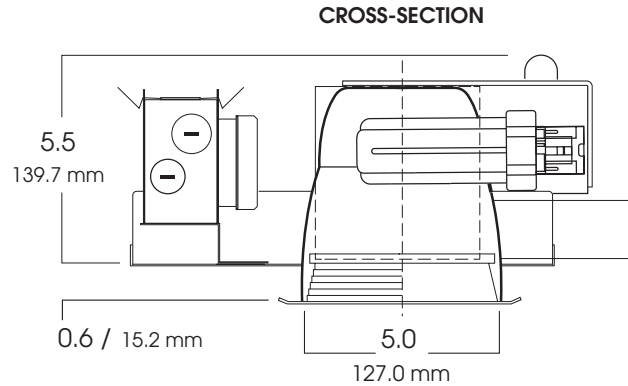

| SERIES | WATTS | BALLAST | OPTIONS | SPLOY | TRIM OPTIONS |
|--|--|---|--|---|--|
| SG5H- Spectrum Gold 5" Horizontal | 113 118 126¹ | EX -Electronic, multi-volt 120v thru 277v DA1 -Advance Mark 10™ powerline dimming, 120v ¹ DA2 -Advance Mark 10™ powerline dimming, 277v ¹ DAM7 -Advance Mark 7™ 0-10v dimming, 120v thru 277v DL1 -Lutron Compact SE™ 120v (min. dimming level 5%) ¹ DL2 -Lutron Compact SE™ 277v (min. dimming level 5%) ¹ | CB24 -C-Channel bars 1-470 CCEA -Chicago Ceiling Plenum CCEA 1-480 CR -Corrosion Resistant 1-460 EM -Emergency battery pack 1-420 FS -Fuse holder and fuse IC -Insulation Contact 1-400 PR -Plaster Ring 1-430 RM -Remodeler Housing 1-450 TBC -T-bar clips 1-475 TP -Tamper Resistant TST -Twist-Lok Socket 1-425 | AR5620-WS -White w/White flange (standard) CS -Clear Alzak w/white flange CSPF -Clear Alzak w/polished flange SGS -Semi-Diffuse Low- Iridescent w/white flange SGSPF -Semi-Diffuse Low- Iridescent w/polished flange RB -Regressed black baffled w/white flange RBBF -Regressed black baffled w/black flange RW -Regressed white baffled w/white flange CC -Custom Color | PG -Prismatic (T73) lens (standard) FG -Frosted Glass FL -Fresnel Lens GL -Clear Glass lens GS -Gasket PC -Clear Polycarbonate PP -Prismatic Polycarbonate WL -Wet Location 1-470 XB¹ -Cross Blade Louver |
| SG5H | 126 | EX | EM/ | AR5620 WS | PG |

¹Triple tube lamp

¹ Not available for 13w Quad or TRT lamp

¹ For **WS, CS, CSPF, SGS** and **SGSPF** trims only

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



| | |
|------------------|--------------|
| PROJECT: | TYPE: |
| CAT. NO.: | |

