



INFINIUM™ SQUARE LED SERIES LED ADJUSTABLE ACCENT LIGHT 40 WATT MAX


ASQLED
SPECTRUM
INFINIUM™

FEATURES & SPECIFICATIONS:

- Infinium™ LED adjustable square aperture accent light.
- Single high powered LED produces point source quality and luminaire focus.
- High flux density LED.
- Rotates 361°/locks. Tilt to 45°/locks.
- All LED modules are replaceable and up-gradable.
- 50,000 hours rated LED life means low maintenance.
- Trim supports a variety of lens /accessory options.
- Intended for Non-IC new construction.
- Frame constructed of 20 ga. aluminum.
- Supplied with 27" long, heavy ga. galvanized steel bar hangers.
- Electronic driver 120 Volt standard.
- Manufactured and tested to UL test no. 1598.


Max Ceiling Thickness: 1.5 (38.1 mm)
Ceiling Cutout: 4.6x4.6 / 6.7x6.7
Fixture Weight: 5 lbs. / 7 lbs.

KELVIN°	WATTAGE	LUMENS
27K°	30W	1280
	40W	1640
32K°	30W	1400
	40W	1800
41K°	30W	1650
	40W	2100
55K°	30W	1900
	40W	2400

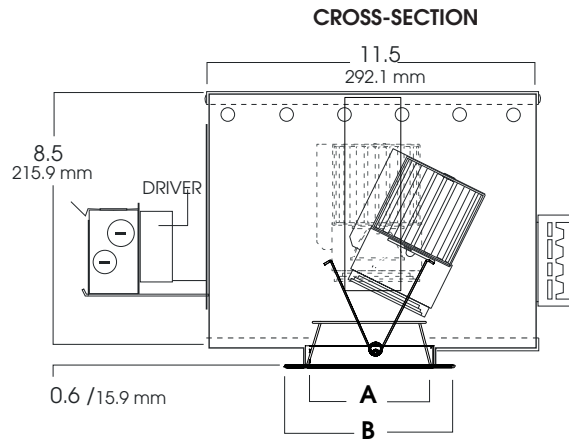

SERIES	A	B
SGA4	4.0	5.5
SGA6	6.0	7.5

TOP VIEW

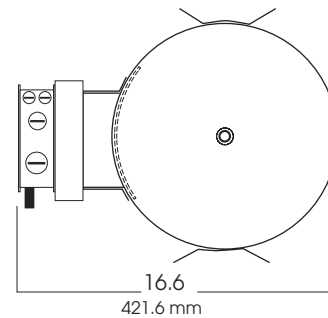

For 2700-3100K
CRI 85
For 3100-3500K
CRI 80
For 4100-5100K
CRI 75

SERIES	LED	KELVIN	CRI	BEAM	DRIVER	OPTIONS	TRIM / FINISH
SGA4SQLED- 4" LED Adjustable Square Downlight	20W	27K -2700 Kelvin (2700K°)	85	ND	E1 -Electronic,120V	BH6 -Expandable Bar Hangers, 6" - 21"	AR0204- (4" Square Aperture)
	30W			MD	E2 -Electronic,277V	BH12 -Expandable Bar Hangers, 12" - 24"	SG -Semi-Diffuse Low Iridescent (standard)
	40W	32K -3200 Kelvin (3200K°)	80		DR1 (STR) -Strato Dimming 120v (30w only)	CB24 -C-Channel bars 1-470	MW -White Finish
SGA6SQLED- 6" LED Adjustable Square Downlight		41K -4100 Kelvin (4100K°)	75		DR2 (STR) -Strato Dimming 277v (30w only)	FS -Fusing	CL -Clear Bright Alzak
		55K -5500 Kelvin (5500K°)	72			CCEA -Chicago Ceiling Plenum CCEA 1-480	GO -Gold Alzak
						CR -Corrosion Resistant 1-460	HZ -Matte Low Iridescent
						PR -Plaster Ring 1-430	PW -Pewter Alzak
						TBC -T-bar clips 1-475	UM -Umber Alzak
						EMLED -Emergency Back-up Battery 1-423 (90 min/800 lumens)	WE -Wheat Alzak
						Consult Factory for Other EM Options	BL -Black Finish
							PF -Polished Flange
SGA4SQLED	20W	3K		ND	E1	EMLED	AR0204 SG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

