

**SPECLUME
REFLECTOR PENDANT
DECORATIVE GLASS TRIM**
INDUCTION / CF / MH


**SL
SERIES**



PRODUCT INFORMATION:

- Reflector Pendant's distinctive styling will enhance any space with efficient lighting and striking design.
- Reflector is spun heavy gauge aluminum.
- Inside finished Soft Glow Alzak for reflectance. Outside finished in your color of your choice.
- Extruded aluminum ballast housing is decorative and functional.
- Choose from 20 powder-coat finish.
- Suitable for use in damp location.
- Manufactured and tested to UL standard No. 1589.

FIXTURE	A	B	C
RPEXT1014	10"	10 1/4"	12 5/8"
RPEXT1214	12"	11 3/4"	14"

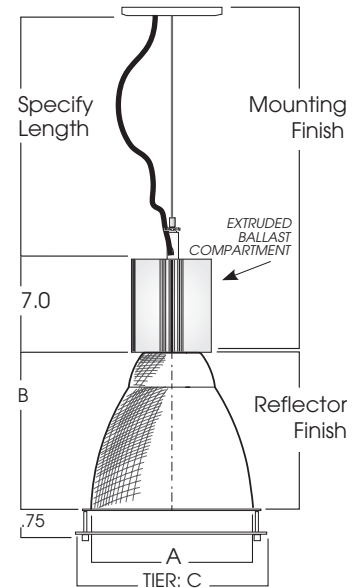

MODEL	WATTS	BALLAST	MOUNTING	MOUNT. FINISH	REFLECTOR	TIER
RPEXT1014 CF-10" Reflector	(1) 13, 18, 26, 32, 42, 57	EX -Electronic, multi-volt 120v thru 277v	CD* -Cord and Cable Mount CDCC* -Coil Cord and Cable Mount	PT -Platinum (Gray Cord/Stem) MB -Matte Black (Black Cord/Stem)	RP10PT -10" Platinum RP10MB -10" Matte Black RP10MW -10" Matte White RP10CC* -10" Custom Color	1TCFG -1 Tier Center Frosted Glass (standard)
RPEXT1214 CF-12" Reflector	(1) 13, 18, 26, 32, 42, 57, 70 (2) 13, 18, 26, 32, 42, 57, 70	DA1 -Advance Mark 10™ powerline dimming, 120v ¹ (CF Only) DA2 -Advance Mark 10™ powerline dimming, 277v ¹ (CF Only)	HM* -Hang Straight Pendant HMAT** -Adjustable Length Hang Straight Pendant	MW -Matte White (White Cord/Stem) CC -Custom Color (see color chart)	RP12PT -12" Platinum RP12MB -12" Matte Black RP12MW -12" Matte White RP12CC* -12" Custom Color *(see color chart)	1TFGR -1 Tier Frosted Glass Ring
RPEXT1014 MH-10" Reflector	(1) 39, 50, 70, 100	G1* -QL Generator 120v G2* -QL Generator 277v *(3K / 4K / 5K)	PM* -Pendant/Straight Mount			
RPEXT1214 MH-12" Reflector	(1) 39, 50, 70, 100, 150					
RPEXT1214 QL-12" Reflector	(1) 55, 85					
RPEXT1014CF	142	EX	CD36	MB	RP10MB	1TCFG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

