




# 7" VERTICAL FLUORESCENT OPEN / WALL WASH/ LENSED

1 x 42 WATT MAX




- 6 1/2" (7") vertical lamp compact fluorescent.
- Available open, lensed, and wall wash.
- 20 gauge galvanized steel frame.
- 12" bar hangers expandable to 24" standard.
- .0625 spun aluminum reflector.
- Junction box pre-wired, grounded.
- Electronic ballast 120/277V standard.
- Ballast serviceable from the ceiling aperture.
- Suitable for use in damp location. Lensed fixture has Wet Location option
- UL listed to standard no. 1598

SIDE VIEW

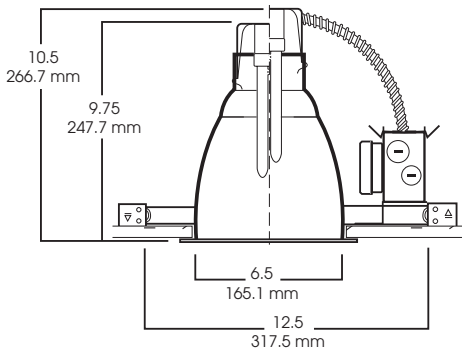


TOP VIEW

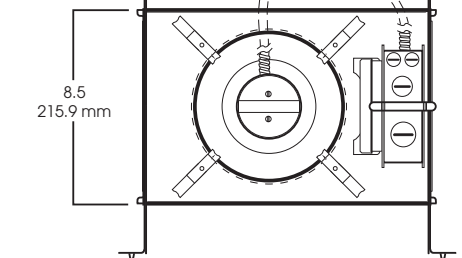

DISTANCE FROM CEILING	21	13.0	DIAMETER OF CIRCLE
5.5	11	18.0	
7.5	7	23.0	
9.5	5	27.0	
11.5	3	32.0	
13.5			

CONE OF LIGHT

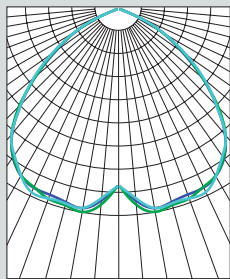

SP7VF142EX/7110 SG  
Efficiency: 55.1%/Spa 1.52  
Spacing: 1.31



## 1. SPECIFY FRAME

FRAME	WATTS	BALLAST	OPTIONS
<b>SP7VF-</b>	<b>113</b>	<b>EX</b> -Electronic, multi-volt 120v thru 277v	<b>EM</b> -Emergency battery pack (specify voltage)
Spectrum	<b>118</b>	<b>DA1</b> -Advance Mark 10™ powerline dimming, 120v	<b>FS</b> -Fuse holder and fuse
Silver 7"	<b>126</b>	<b>DA2</b> -Advance Mark 10™ powerline dimming, 277v	<b>PR</b> -Plaster ring (pg 1-430)
Vertical	<b>132</b>	<b>DM7</b> -Advance Mark 7™ 0-10v dimming, 120v thru 277v	<b>RM</b> -Remodler housing
	<b>142</b>	<b>DL1</b> -Lutron Compact SE™ 120v (min. dimming level 5%) <sup>1</sup>	<b>BH27</b> -27" mounting bar
		<b>DL2</b> -Lutron Compact SE™ 277v (min. dimming level 5%) <sup>1</sup>	<b>TBC</b> -T-bar clip
<b>SP7VF</b>	<b>132</b>	<b>EX</b>	

## 2. SPECIFY TRIM

OPEN

LENSED



TRIM #	FINISH	OPTIONS	TRIM #	SPLAY FINISH	LENS/OPTIONS
<b>7110</b>	<b>SG</b> -Soft Glow	<b>GS</b> -Gasket	<b>7120</b>	<b>WS</b> -White / White flange (standard)	<b>PG</b> -Prismatic Glass lens (standard)
Open	<b>CL</b> -Clear Alzak	<b>BB</b> -Black Micro	Lensed	<b>SGS</b> -Soft Glow/ White flange	<b>FG</b> -Frosted Glass
Trim	<b>GO</b> -Gold Alzak	<b>Baffle</b>	Trim	<b>RB</b> -Regressed Black baffle	<b>FL</b> -Fresnel Lens
	<b>HZ</b> -Haze	<b>WB</b> -White Micro		<b>RW</b> -Regressed White flange	<b>GL</b> -Clear Glass lens
	<b>PW</b> -Pewter	<b>Baffle</b>		<b>PF</b> -Polished Flange	<b>GS</b> -Gasket
	<b>UM</b> -Umber Alzak	<b>CW</b> -Corner Wall Wash		<b>BF</b> -Black Flange	<b>PC</b> -Clear Polycarbonate
<b>7920</b>	<b>WE</b> -Wheat Alzak	<b>DW</b> -Double Wall Wash			<b>PP</b> -Prismatic Polycarbonate
Wall	<b>BL</b> -Black Finish				<b>WL</b> -Wet Location 1-470
Wash	<b>WH</b> -White Finish				<b>XB</b> -Cross Blade Louver
	<b>PF</b> -Polished Flange				<b>DO</b> -Drop Opal
	<b>BF</b> -Black Flange				
<b>7110 SG</b>	<b>GS</b>		<b>7120 SG</b>	<b>PG</b>	

## 3. FINISHED ORDER/SPECIFICATION

**SP7VF132 EX/7120 WS PG**

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

