

# 4" MODULAR ACCENT LIGHT REGRESSED BEVELED FLANGED MR16 SERIES / MULTI-MODULE



## RC4-LVRT - REGRESSED BEVELED FLANGED / NON-IC RATED APPLICATION

RC4 series MR16 Low Voltage modular fixture for retail, residential and commercial accent lighting.

### FEATURES

Regressed Beveled Flanged for clean finished appearance. Fixture available with 1-4 modules. Fixture modules rotate 359°, lock and tilt to 40° for optimal aiming. Easy transformer and j-box access. Multi-bar adjustable mounting brackets. Posi-lock trim attachment. Front loading lamp bezel accepts up to two lens/louver options. Integral 0.625" collar, with Deep Ceiling Extension (PR) consult factory. Maximum wattage label (MWL) for low wattage Halogen or LED lamps.

### TRIM FINISH

A variety of architectural powdercoat finishes for interior of fixture and trim are available.

### ELECTRONICS



Electronic 120V transformer is standard. 277V electronic, 120V and 277V LED rated electronic and remote transformer options. High temperature rated porcelain GU10 socket. 50W per lamp max.

### CONSTRUCTION

Housing formed #20 gauge galvanized steel, finished to specification. Trim fabricated from aluminum extrusion and finished to specification.

### CODE COMPLIANCE

ARRA Compliant. Non-IC rated. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.

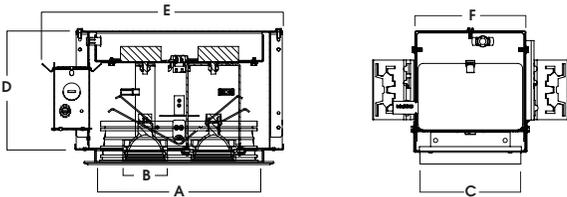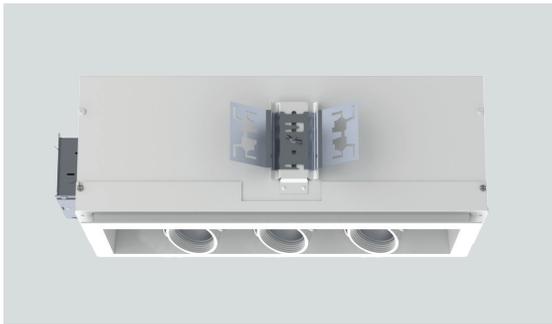

#OF MODULES	APERTURE			H	L	W	CUTOUT
	A	B	C				
1	4.0	2.3	4.0	6.1	8.1	5.6	5.1" x 5.1"
2	8.0	2.3	4.0	6.1	11.8	5.6	5.1" x 9.0"
3	12.0	2.3	4.0	6.1	15.8	5.6	5.1" x 13.0"
4	16.0	2.3	4.0	6.1	19.8	5.6	5.1" x 17.0"

SERIES	LAMPS	TRANSFORMER / VOLTAGE	OPTIONS <sup>1</sup>	INTERIOR	TRIM <sup>4</sup>	FINISHES <sup>5</sup>
RC44LVRT 1 Module	MR16	E Electronic Driver E_LED Transformer for Use with LED MR16 Lamps	1 120V 2 277V	<b>GL16</b> Clear <b>FG16</b> Frosted <b>SK16</b> Linear <b>SO16</b> Solite Diffusion <b>HL16</b> Hex Louver <b>SN16</b> Snoot <b>LN16<sup>2</sup></b> Color Lens	<b>MWI</b> White <b>MBI</b> Black <b>PTI</b> Platinum <b>BZI</b> Bronze <b>CCI</b> Custom Color	<b>RT244</b> 4" x 4"  <b>RT248</b> 4" x 8"  <b>RT2412</b> 4" x 12"  <b>RT2416</b> 4" x 16"
RC48LVRT 2 Modules						
RC412LVRT 3 Modules						
RC416LVRT 4 Modules			<b>BH27</b> 27" Flat Bar <b>CB24</b> 24" C-Channel <b>CB48</b> 48" C-Channel <b>MWL(**)</b> Max Wattage Label <b>RTT150E1</b> 150W Remote Transformer <b>RTT300E1</b> 300W Remote Transformer <b>FS</b> Fusing <b>PR<sup>3</sup></b> Deep Plaster Neck			

**EXAMPLE:** RC48LVRTMR16E1LED/SO16SN16BH27MBI/RT248MW

**NOTES:**  
 1 See Product Options Page for Details 2 See Lens Options Page for Details 3 Contact Factory 4 Inside Trim And Flange Will Match Color Specified 5 Contact Factory for Special Finishes 6 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

