


4" ROUND DOWNLIGHT TRIMLESS

PROJECT: _____
 QUANTITY: _____ TYPE: _____

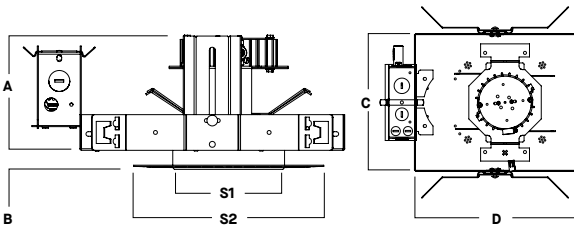

A	B	C	D	S1	S2
4.8 121.9 mm	0.625 15.9 mm	9.5 241.3 mm	13.6 345.4 mm	4.3 109.2 mm	8.0 203.2 mm

SG4PZIN

APPLICATION

4" trimless aperture series with deep cutoff for A and PAR LED lamps.

FEATURES

Efficient reflector design optimized for Incandescent or LED lamps (Sold by others). Posi-lock reflector attachment. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat finishes available on trim.

LAMPING

Accepts E21 medium base A lamps and PAR20/30 lamps.

CONSTRUCTION

Frame constructed of 20 ga. galvanized steel. Reflectors spun from .063" high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp locations. Manufactured and tested to UL Standard No. 1598.

PRODUCT SELECTOR GUIDE

SERIES	BAR HANGERS	TRIM	FINISH	LENS
SG4PZIN	/	NF4415		

EXAMPLE

SG4PZIN	/	BH27	/	NF4415	MW	SO
----------------	---	-------------	---	---------------	----	----

HOUSING

MOUNTING OPTIONS

TRIM OPTIONS

SERIES	BAR HANGERS	TRIM	FINISH	LENS
SG4PZIN	BH27 27" Solid Bars H12 12" - 24" Expandable Bars	NF4415	MW Matte White MB Matte Black	GL Clear Glass Lens SO Micro Prism Solite™ Lens NL No Lens

